



# ORA3-LED50

## LED WALL / FLOOD LIGHT



### SPECIFICATIONS\*

Watts	50W
Lumens	5470
Efficacy	111 lm/W
Replaces Up To	150W MH 1500W Quartz
Colour Temp	4,000K
Certification	cULus, DLC, IP65
Operating Temp	-40°C to +40°C
Voltage	120-277V, 347V in wall mount coming soon
LED Life	100,000 hours
Housing Material	Aluminum
Lens Material	Polycarbonate
Total Harmonic Distortion	19.78%
Power Factor	0.9788
Mounting Options	Yoke Mount, Knuckle Mount, Wall Mount



## DESCRIPTION

The ORA-LED is a fully adjustable multi-purpose fixture that replaces traditional wall packs or floods. The ORA features a sleek, elegant design with multiple mounting options.

## APPLICATIONS



Town Houses



Condos



Perimeter  
Lighting



Shopping Malls




## FEATURES

- Elegant, sleek design with a modern look.
- Fixture head may be aimed down for dark sky compliance, or aimed out as needed.
- Three mounting options available – knuckle, yoke and wall mount.

\*The above specs apply to the standard product configuration. For spec information on other product configurations please see page 3.

**NOTE:** Not all of our product configurations are qualified on the DLC QPL. To view all of our DLC qualified products please visit the DLC qualified products list at [www.designlights.org/qpl](http://www.designlights.org/qpl).

**DIMENSIONS**

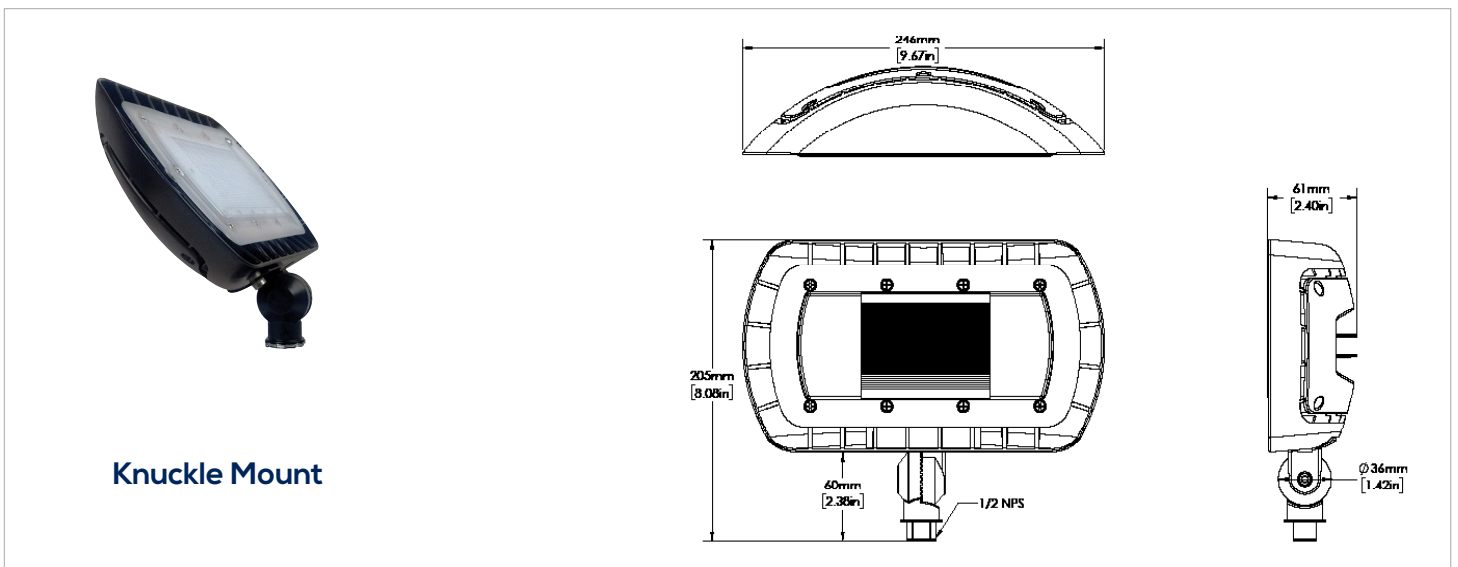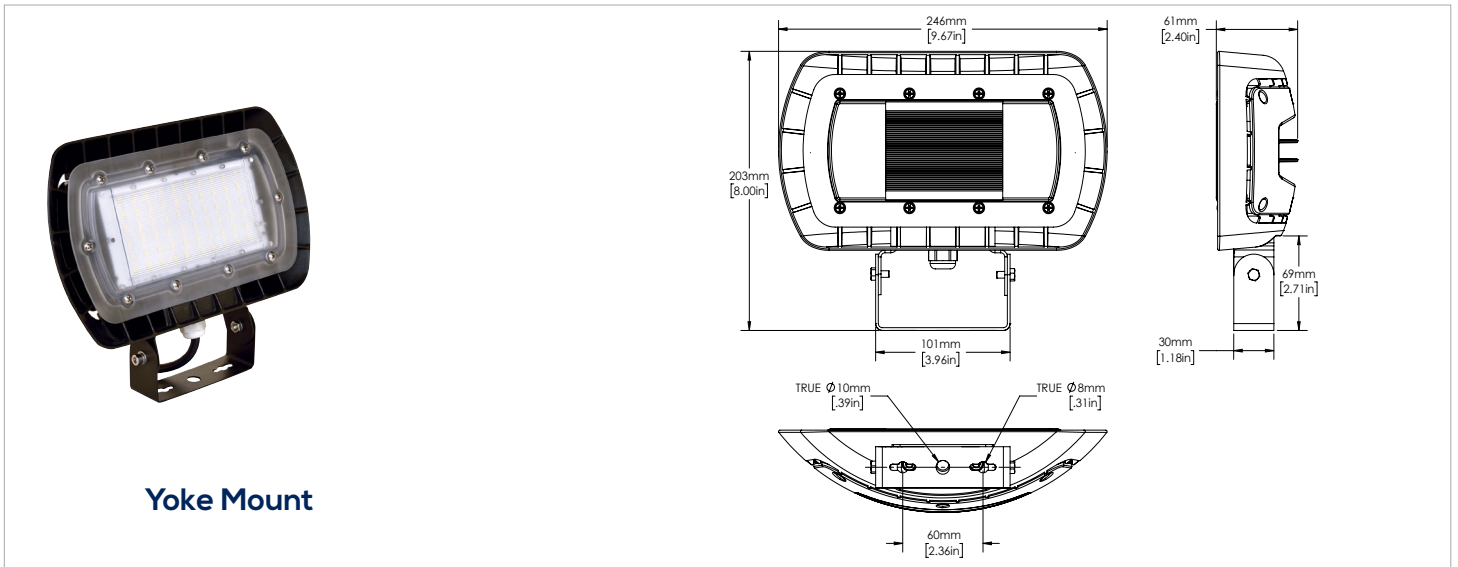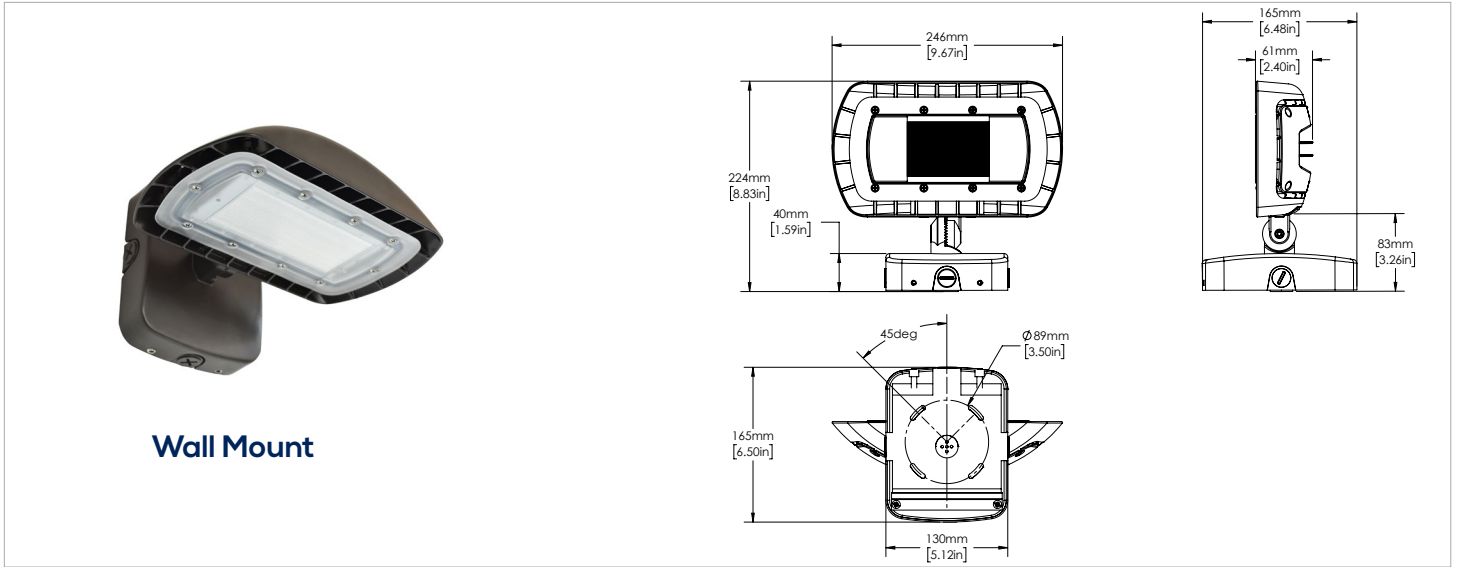

## SPECIFICATIONS

SPECIFICATIONS	VOLTAGE(V)	INPUT POWER (W)	LIGHT OUTPUT	EFFICACY(Lm/W)	THD (%)	PF
ORA3-LED50-B-4K-XXX-XX	120-277	49.3	5470	110.95	19.78	0.9788


DLC listed as Outdoor Full-Cutoff Wall-Mounted Area Luminaire and as Architectural Flood and Spot Luminaires

### Legend

- B - 120-277V
- 4K - 4000K
- XXX- Finish
- XX- Mounting


## PHOTOMETRICS

### ORA3-LED50 4K MOUNTED AT 15 FEET - WALL MOUNT ORIENTATION

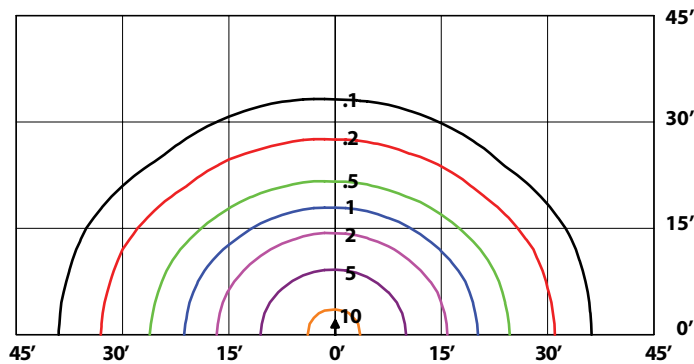


## ARCHITECTURAL WALL MOUNT

For architectural wall mount version order ORA knuckle mount with architectural backbox separately

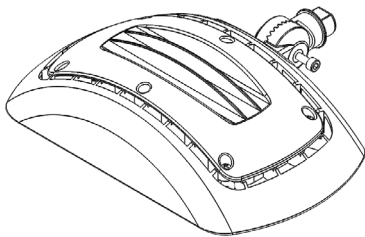

### Step One

Remove screw from knuckle mount

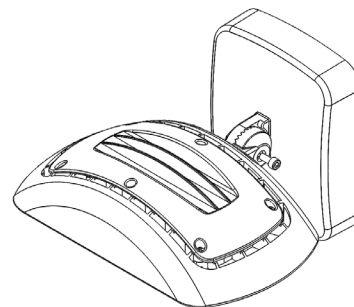

### Step Two

Mount on bracket with wiring and tighten screw

## ORDERING GUIDE

<b>ORA3</b>						
<b>WATTS</b>	<b>VOLTAGE</b>	<b>COLOUR TEMP.</b>	<b>FINISH</b>	<b>MOUNTING</b>	<b>OPTIONS</b>	
LED50	B - 120 - 277V*	4K - 4000K*	BRZ - BRONZE*	KN-Knuckle	PC- Photocell	
				YK - Yoke		
				WMC - Wall Mount with 3 conduit entries		

\* Standard configuration

## FIELD INSTALLED ACCESSORIES

### CHECK THE ACCESSORIES YOU WISH TO ORDER:

Wall mount with 3 Conduit Entries Bronze

Architectural Wall Mount Bracket without conduit entries  
Bronze