



Light Columns

LED Light Columns

Watts 18W, 30W, 60W other wattages available

Height 8ft, 10ft, 12ft
Other Sizes Available

Mounting Direct Burial, Surface Mount

Diameter 6" Standard, Custom Sizes Available

Voltage 120-277V, 480V

Cut-Off Shields 180° House Side Cut Off,
Custom Decorative Inserts Available

Laser Etching/
Engraving Company Logos

Laser Cut Laser Cut Patterns/Logos

Finish Sandtex Black, Dove Grey (standard)
Custom Colours Available

Colour Temperature 3K/4K/5K Standard

LED Colours Custom LED Colours Optional
(red, green, blue)

Dimming 0-10V Dimming
Other Options Available

Lens White

Distribution Type 5 (standard)

Options GFCI outlets (120V only) , EV Charging
Stations,
Courtesy USB charging,

Surge Suppression Standard 6kv
Optional 10kv

DESCRIPTION

LED Light Columns are fully customizable for a variety of looks and features to meet your desired function.

APPLICATIONS



Parking Lots



Condos



Parks



Office
Complexes

FEATURES

- Shafts are made of 6" extruded aluminum .125" wall thickness
- Surface mount units have four 3/4" diameter galvanized anchor bolts with a 9 1/2" bcd, two piece aluminum base cover included
- Lens is made of acrylic 6" diameter with a white finish to provide a soft even distribution type v
- Hand hole opening provided as standard

CUSTOM OPTIONS



Standard Colors							
bronze 195632 / GS12M17	matte black 103849 / 39/90020	black sandtex (textured) 194288 / P-2128-LT	mirror black (shiny) 103849 / PS111N9	white 103847 / P-1771-9	dove grey 000047 / SCP-409	blue 103865 / SCP-910	
red 103866 / P-6015-8	yellow 195585 / RAL 1018 (TIGER)	green 103884 / SCP-651	garden green 194070 / TD01032-F-FILE#116P6				
Metallic Colours		Custom Colours					
hammertone 194290 / TGIC DCL#5580-0799-MH1	sparkle silver 194280 / PM211S11						

CUSTOM FINISHES




LASER CUT LOGOS




LASER CUT PATTERNS

(Please allow for longer lead times, pattern will be reviewed before confirmation)

CUSTOM OPTIONS

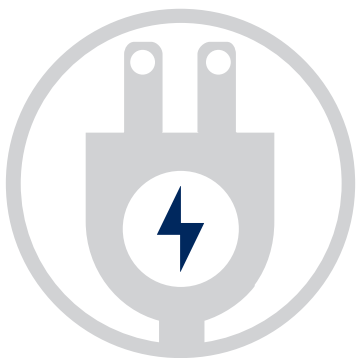

EV CHARGING STATIONS



GFCI OUTLETS



COURTESY USB

MOUNTING




DIRECT BURIAL



SURFACE MOUNT

DIMENSIONS


DIRECT BURIAL

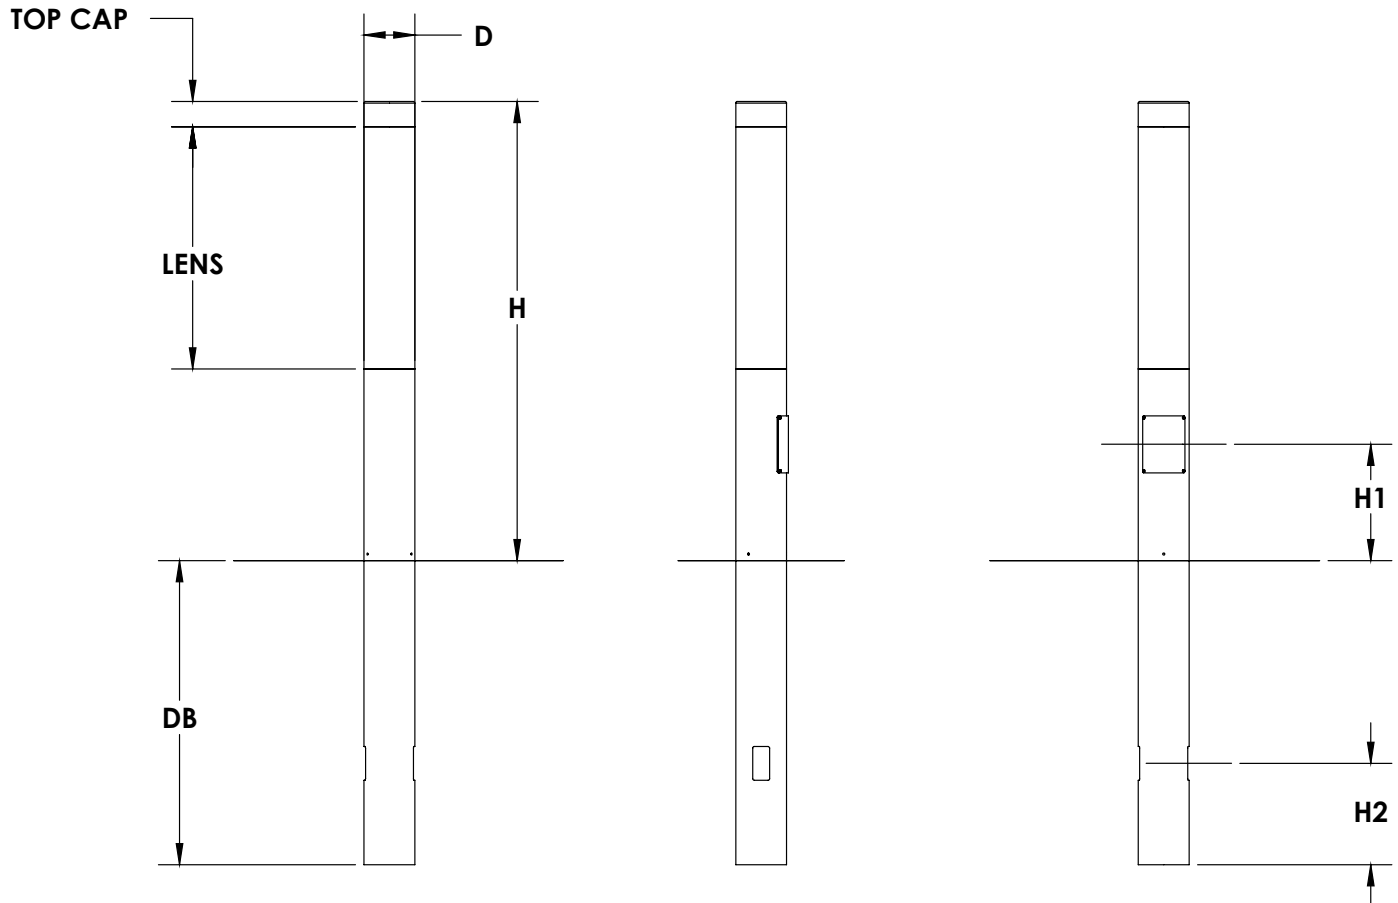

- D - COLUMN DIAMETER
- DB - DIRECT BURIAL - LENGTH UNDER GROUND
- H - HEIGHT ABOVE GROUND
- H1 - HEIGHT FROM GROUND LEVEL TO CENTER OF HAND HOLE
- H2 - HEIGHT FROM BOTTOM OF ALUMINUM TUBE TO LINE CABLES' OPENINGS

DIMENSIONS

SURFACE MOUNT

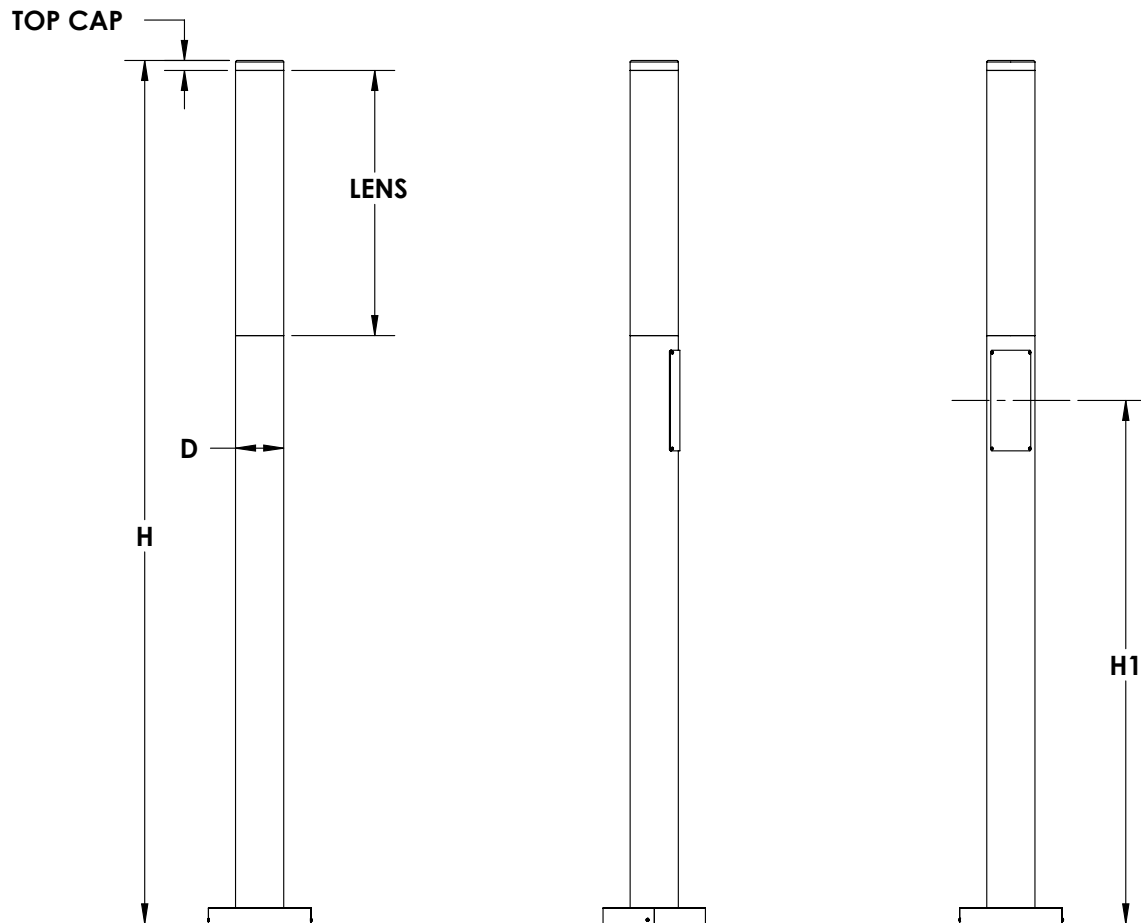

D - COLUMN DIAMETER
H - TOTAL HEIGHT FROM GROUND LEVEL
H1 - HEIGHT TO CENTER OF HAND HOLE

ORDERING GUIDE

LC						
	WATTS	VOLTAGE	COLOUR TEMP.	FINISH	MOUNTING	DIM
	LED18	B - 120 - 277V*	3K - 3000K	SANDTEX BLACK	Direct Burial	0-10V Dimming
	LED30	L - 480V	4K - 4000K*	DOVE GREY	Surface Mount	
	LED60		5K - 5000K	CC - Custom		

* Standard

CUSTOM OPTIONS



LASER CUT LOGO



LASER CUT DESIGN

(Please allow for longer lead times, pattern will be reviewed before confirmation)



GFCI OUTLET



EV CHARGING STATION



COURTESY USB CHARGING