Project Type Date Notes





Light Columns

LED Light Columns

Watts	18W, 30W, 60W other wattages available			
Height	8ft, 10ft, 12ft Other Sizes Available			
Mounting	Direct Burial, Surface Mount			
Diameter	6" Standard, Custom Sizes Available			
Voltage	120-277V, 480V			
Cut-Off Shields	180° House Side Cut Off, Custom Decorative Inserts Available			
Laser Etching/ Engraving	Company Logos			
Laser Cut	Laser Cut Patterns/Logos			
Finish	Sandtex Black, Dove Grey (standard) Custom Colours Available			
Colour Temperature	3K/4K/5K Standard			
LED Colours	Custom LED Colours Optional (red, green, blue)			
Dimming	0-10V Dimming Other Options Available			
Lens	White			
Distribution	Type 5 (standard)			
Options	GFCI outlets (120V only) , EV Charging Stations, Courtesy USB charging,			
Surge Suppression	Standard 6kv Optional 10kv			

DESCRIPTION

LED Light Columns are fully customizable for a variety of looks and features to meet your desired function.

APPLICATIONS



Parking Lots



Condos



Parks




Office Complexes

FEATURES

- Shafts are made of 6" extruded aluminum .125" wall thickness
- Surface mount units have four 3/4" dimeter galvanized anchor bolts with a 9 1/2" bcd, two piece aluminum base cover included
- Lens is made of acrylic 6" diameter with a white finish to provide a soft even distribution type v
- Hand hole opening provided as standard



CUSTOM OPTIONS

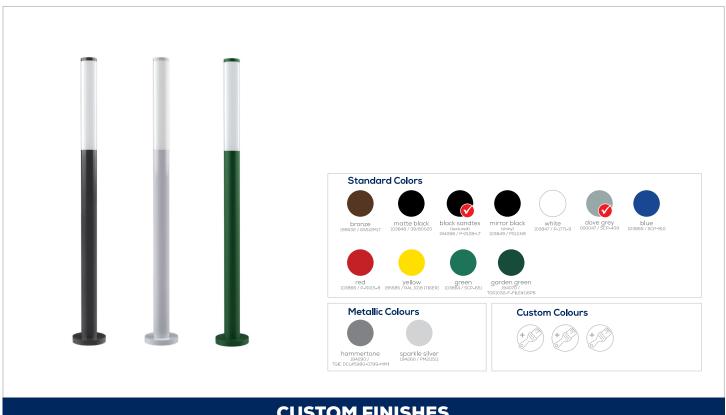

CUSTOM FINISHES







(Please allow for longer lead times, pattern will be reviewed before confirmation)



CUSTOM OPTIONS

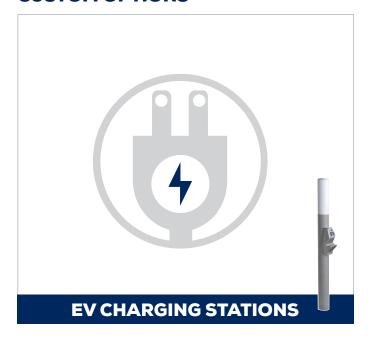



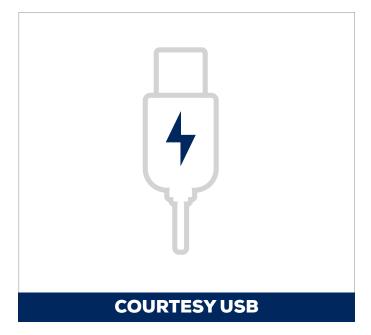

MOUNTING








DIMENSIONS

DIRECT BURIAL

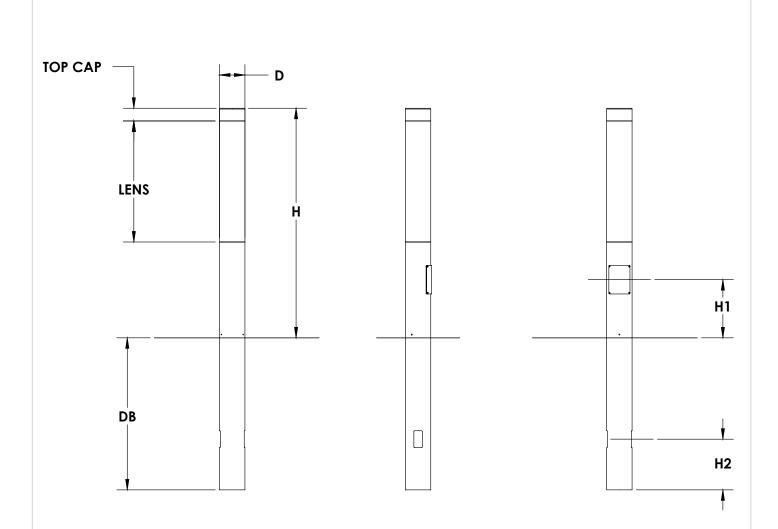

D - COLUMN DIAMETER

DB - DIRECT BURIAL - LENGTH UNDER GROUND

H - HEIGHT ABOVE GROUND


H1 - HEIGHT FROM GROUND LEVEL TO CENTER OF HAND HOLE

H2 - HEIGHT FROM BOTTOM OF ALUMINUM TUBE TO LINE CABLES' OPENINGS




DIMENSIONS

SURFACE MOUNT

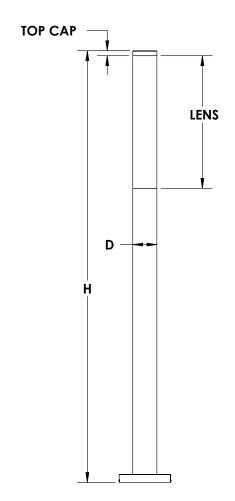





D - COLUMN DIAMETER
H - TOTAL HEIGHT FROM GROUND LEVEL
H1 - HEIGHT TO CENTER OF HAND HOLE



ORDERING GUIDE

LC						
	WATTS	VOLTAGE	COLOUR TEMP.	FINISH	MOUNTING	DIM
	LED18	B - 120 - 277V*	3K - 3000K	SANDTEX BLACK	Direct Burial	0-10V Dimming
	LED30	L - 480V	4K - 4000K*	DOVE GREY	Surface Mount	
	LED60		5K - 5000K			
				CC - Custom		

^{*} Standard

