



LOS2400H 120 OCCUPANCY SENSOR

Hallway version of the LOS2400. Integral 20 amp power pack. No extra wires to run or extra boxes to install. Covers hallway pattern of 16' x 80'. LED detection indicator.

EASY INSTALLATION Relay and sensor all in one reduces installation cost. Compatible with dimmers and electronic ballasts. LED testing and operation indicator.

MAXIMUM RELIABILITY Adjustable detector sensitivity for superior detection.

MAXIMUM VERSATILITY Adjustable time delay. Sensor detection pattern can be customized. No minimum load requirement. Can be wired in parallel.

LISTING CUL US for indoor applications.

COVERAGE AREA 16' x 80' Hall pattern

DETECTION 360° view super ceiling sensor.

FLUORESCENT WATTS SWITCHED
2400 watts

INCANDESCENT WATTS SWITCHED
2400 watts

MANUAL SWITCH Override key

POWER CONSUMPTION Negligible

RATINGS AMPS HORSEPOWER
20 amps 1 horsepower

TIME DELAY 6 to 15 minutes

COLOUR White


WEIGHT 0.5lbs.



DETECTION PATTERN



Top View

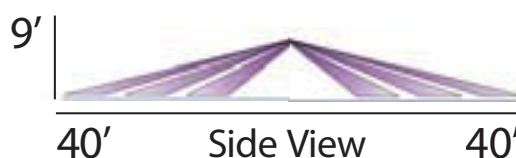

DIMENSIONS

