



WL-LED26
LED Wall Light



IDEAL APPLICATIONS

- ☒ Entrances
- ☒ Walkways
- ☒ Exit Doors

DESCRIPTION:

The WL-LED26 is an energy efficient wall light for outdoor use that replaces up to a 70W HPS fixture.

FEATURES:

Construction

- Durable aluminum housing and polycarbonate lens to withstand harsh weather conditions. The WL-LED26 has a cast aluminum backplate and two conduit entries; one on the back and one at the bottom.

LED Configuration

- The fixture contains one high efficiency LED board that delivers a total lumen output of 3,258 lumens at an efficacy of 124 lumens/ watt. This serves as an ideal replacement for a 70W HPS fixture. LEDs have a colour temperature of 5000K as standard

Electrical

- Total system wattage of the unit is 26.19W. The standard unit has a high efficiency driver that operates at 120 - 277V.

Photocell

- Electronic photocell is included.


Finish

- Bronze


SPECIFICATIONS		WL-LED26
Watts		26.19W
Lumens		3,258 Lm
Efficacy		124 Lm/W
Voltage		120-277V
Colour Temp		5000K
CRI		74.5
Dimming		0-10V Dimming
THD		14.1%
PF		0.99
LED Life (L80)		>54,000 hours
Operating Temp		-40°C to +40°C
Housing Material		Die Cast Aluminum
Mounting		Wall Mount
Accessories Sold Separately		Wire cage
Certification		ETL Listed, 5 Year Warranty, Wet Locations, DLC Standard




DIMENSIONS:

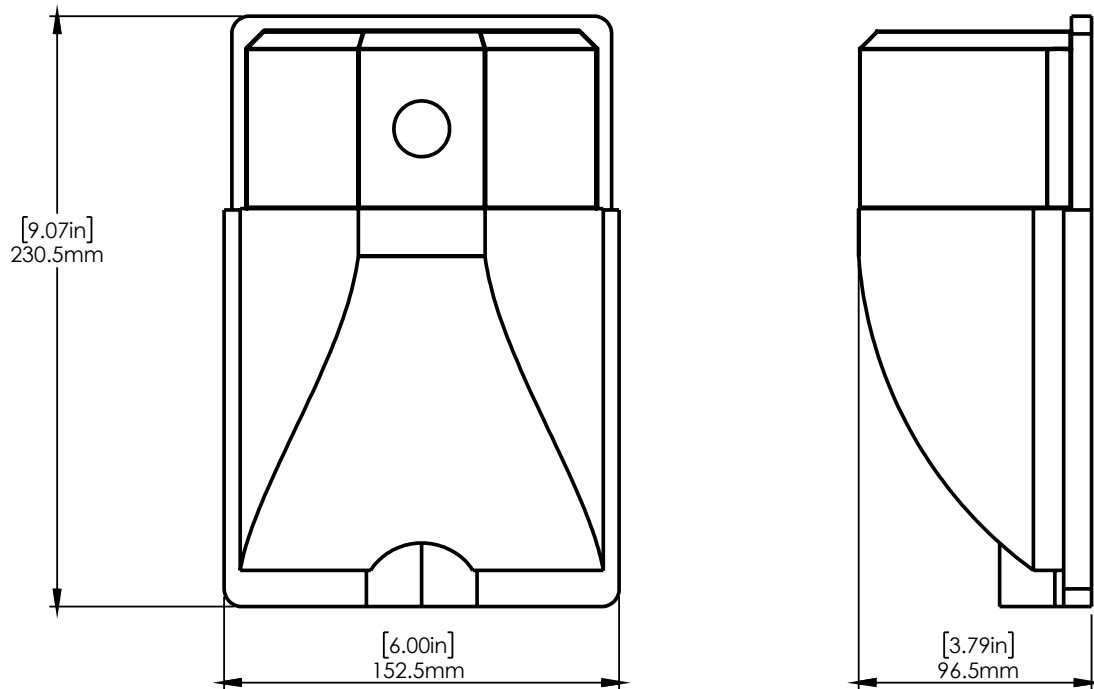

ACCESSORIES (WIRE CAGE ORDER SEPARATELY):

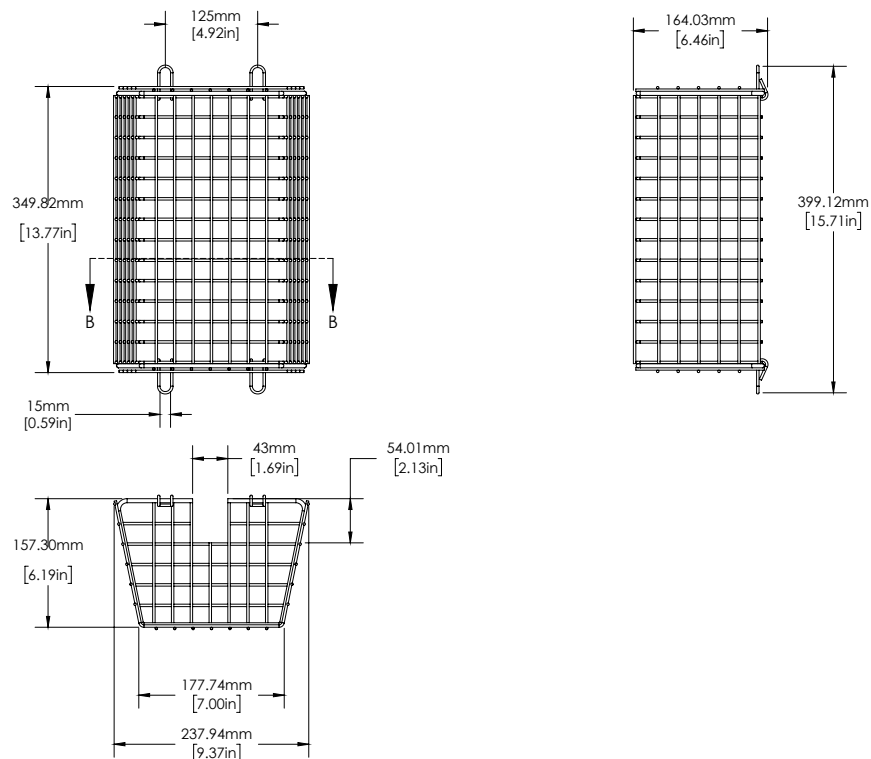

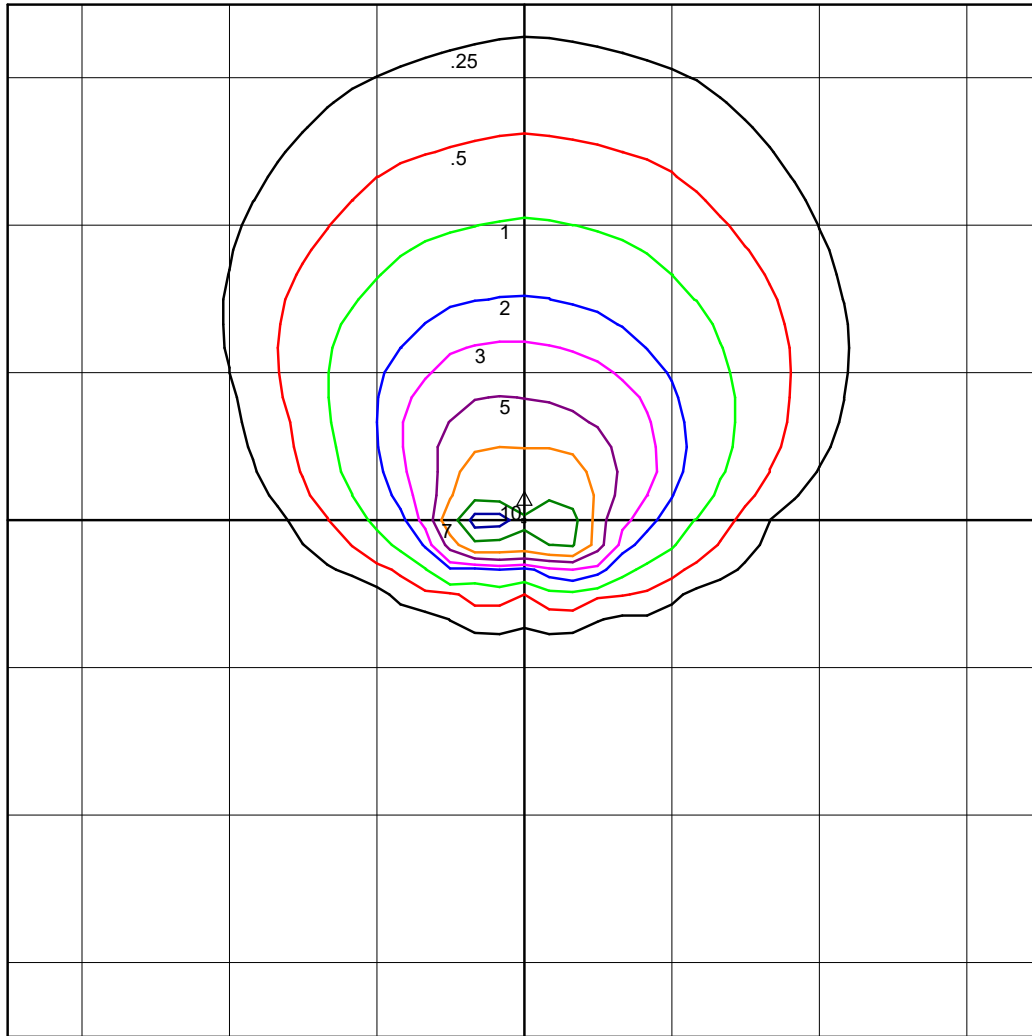

WL-LED26-B-5K-DIM-PC-CL

Horizontal Footcandles
 Scale: 1 Inch = 10 Ft.
 Light Loss Factor = 1.00
 Lumens Per Lamp = N.A. (absolute photometry)
 Luminaire Lumens = 3179
 Mounting Height = 10.00 Ft
 Maximum Calculated Value = 12.96 Fc
 Arrangement: Single

ORDERING GUIDE:

WL	LED26	B	5K	BRZ	DIM	PC	CL
Fixture	Wattage	Voltage	Colour Temp.	Finish	Dimming	Photocell	Lens
	LED26	B - 120-277V	5K - 5000K	BRZ - Bronze	DIM - 0-10V Dimming	PC - Photocell	CL - Clear Lens

Note: Photocell can be deactivated by disconnecting the wires to the photocell.

(remove the threaded button photocell and disconnect wires, ensure to fasten the photocell for proper sealing).

ORDERING GUIDE

Check the items that you wish to order:

- ☐ 093454 WL-LED26-B-5K-BRZ-DIM-PC-CL
- ☐ 098016 - WIRE CAGE ZINC PLATED STEEL F/WL