



SBL6F-LED

Round Bollard with Flat Top



IDEAL APPLICATIONS

- ✓ Condos
- ✓ Schools
- ✓ Townhouses
- ✓ Office Buildings
- ✓ Pathways
- ✓ Retail

DESCRIPTION:

A traditional 6" round flat top bollard with adjustable Kelvin 3000K, 4000K, 5000K and adjustable wattage 22W, 16W and 12W. No matter the application this one unit can be used for most applications all you need to do is select the wattage and kelvin. If after installation the fixture can be adjusted for wattage if its to bright or change the kelvin


FEATURES:

- Adjustable wattage 22W, 16W and 12W.
- Selectable kelvin 3000K/4000K/5000K.
- Dimmable Driver 0-10V.
- Extruded aluminum shaft with a power coat paint finish. Salt spray tested
- Polycarbonate lens with UV inhibitors to prevent yellowing of the lens.
- Cast aluminum head and base.
- Complete with anchor bolts and template.

SPECIFICATIONS	SBL6F-LED
Watts	21.24 W
Lumens	2923.85 Lm
Efficacy	137.66 Lm/W
Voltage	120-277V
CCT	VK(3000K/4000K/5000K)
CRI	86.8
Dimming	0-10V Dim to Off
THD (%)	7.69%
Power Factor	0.994
Beam Distribution	T5-360 Degree
LED Life (L70)	>72000 hours
Housing Finish	Bronze*, Custom Colours
Housing Details	Die Cast Aluminum
Lens Details	Clear PC Lens
Mounting	Surface mount
Height	42"
Operating Temp.	-40°C to +40°C (-40°F to 104°F)
Certifications	UL, Wet Location, IP65, DLC



DIMENSIONS:

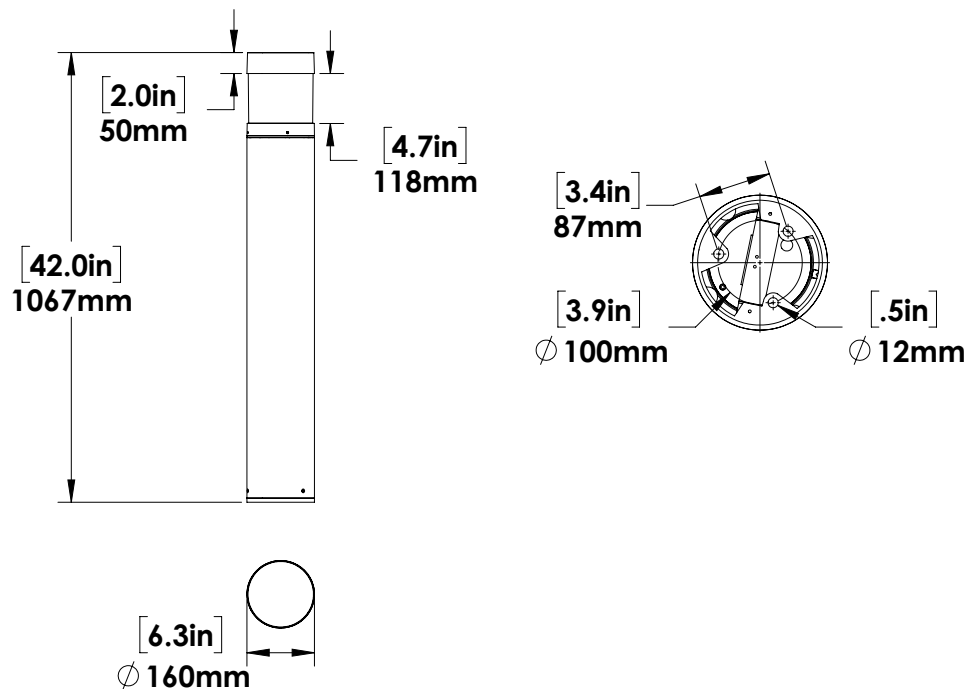

AMPERAGE DRAW & SURGE PROTECTION

	CURRENT (A)				SURGE PROTECTION (kV)
	120V	208V	240V	277V	
SBL6F-LED	0.19A	0.11A	0.1A	0.09A	2kV

LUMEN ADJUSTABLE SETTINGS

Power (W)	22	16	12
Lumens (lm)	2923	2000	1500


TM-21 ESTIMATED LUMEN MAINTENANCE

	50,000 Hours	75,000 Hours	100,000 Hours
SBL6F-LED	87.1%	81.3%	75.9%

Life hours are derived from iesna lm-80 testing report and projected per IESNA TM-21 calculations.

SBL6D-LED22A12-B-VK-T5-BRZ-DIM
22 WATTS 4000K

Total Lumens = 3022 Mounting Height = 3.5 Ft Maximum Calculated Value = 24.29 Fc

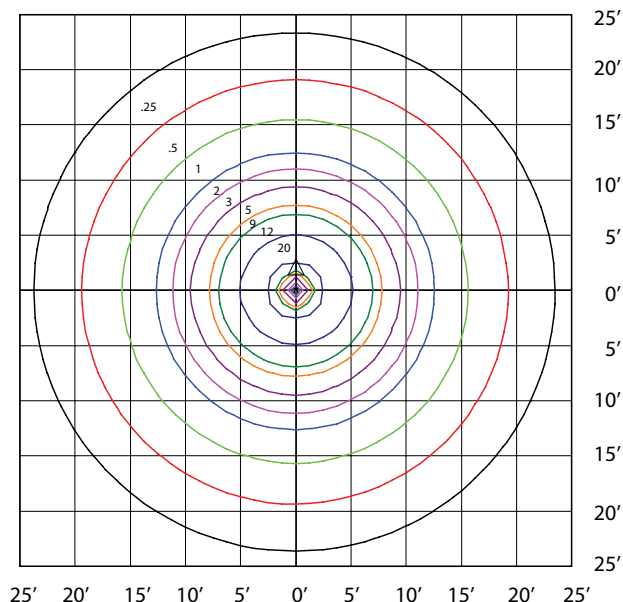

ORDERING GUIDE:

SBL6F	LED22A12	B	VK	T5	BRZ	DIM
-------	----------	---	----	----	-----	-----

Fixture	Wattage	Voltage	Colour Temp.	Optics	Finish	Dimming	Controls
	LED22A12	B - 120-277V	VK - Colour Selectable (3000K/4000K/5000K)	T5-360 Degree	BRZ - Bronze	DIM - 1-10V Dimming	Blank PC - Photocontrol