



REVOLVE | REV4

Space Light

Easier to install, adjust, and sell.

Revolve, the space light that showcases seamless colour selectability and easy installation at great prices. Loaded with cutting edge features including 5 CCT selectability and an optional PIR sensor.



Seamless installation and operation with a convenient CCT switch



CCT
Selectability



Easy
Installation



Integrated PIR
Motion Sensor

- 5 CCT option, comes with integrated PIR motion sensor.
- Change the CCT with ease (access the switch by simply removing the lens).
- Frosted PC lens ensures even illumination.
- 110 DEG Beam angle.



Choose the Best REV4 For You



**REV4-LED12
with PIR sensor**

- ✓ 5 CCT
- ✓ No Dimming
- ✓ PIR Motion Sensor




**REV4-LED12
without PIR sensor**

- ✓ 5 CCT
- ✓ No Sensor
- ✓ TRIAC Dimming

5 CCT Selection

Offering a versatile range of color temperature options to perfectly adapt to any setting and lighting condition.

Like no other, effortlessly select your preferred CCT by simply removing the lens of the fixture.




2700 3000 3500 4000 5000



Many Applications

The REV4 is an ideal option for new construction and remodeling projects in commercial and residential applications.

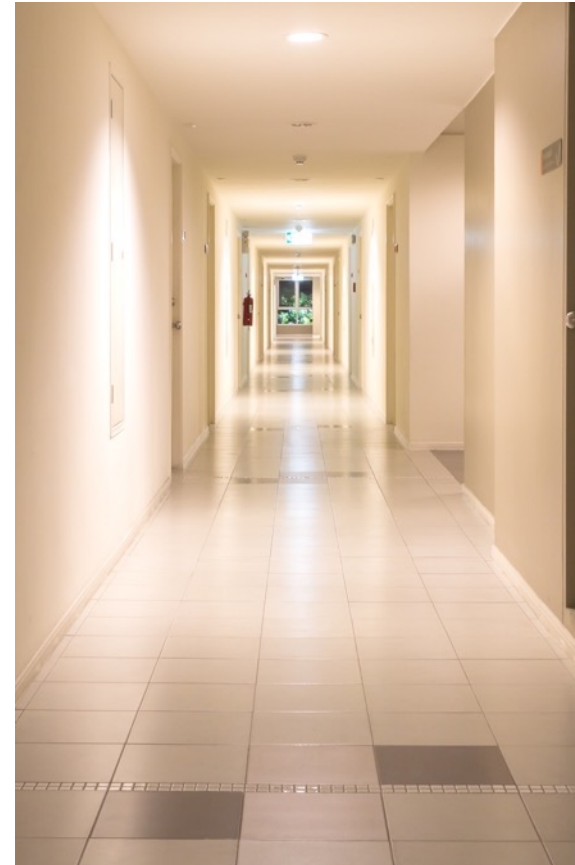

Specifications

	REV4-LED12-A-VK-WHT-TRIAC	REV4-LED12-A-VK-WHT-SMS
PERFORMANCE		
Light Output	900lm	
Efficacy	75 lm/W	
Colour Temp	CCT Selectable - 2700K/3000K/3500K/4000K/5000K	
Beam Distribution	110°	
Replaces Up To	18W CFL	
CRI	80	
ELECTRICAL		
Wattage	12W	
Voltage	120V	
Surge Protection	2.5kV (Built-in Driver)	
Power Factor	>0.9	
THD	<15%	
Cord	6" Wire Leads	

Specifications


	REV4-LED12-A-VK-WHT-TRIAC	REV4-LED12-A-VK-WHT-SMS
CONSTRUCTION		
Housing	Steel	
Lens	Frosted Polycarbonate	
Weight	Fixture: 0.33 lbs	
AMBIENT OPERATING TEMPERATURE		
-30°C to 50°C (-22°F to 122°F)		
MOUNTING		
Surface Mount		
Recess Can Retrofit Mount (for 4" Recess Can)		
CONTROLS		
Dimming	TRIAC	None
Motion Sensor	None	PIR Sensor

Ordering Guide

REV4	LED12	A	VK	WHT		
FIXTURE	WATTAGE	VOLTAGE	COLOR TEMP.	FINISH.	DIMMING	MOTION SENSOR
REV4	LED12	A-120V	VK – CCT Selectable	White	TRIAC - Dimming	BLANK – No Motion Sensor
					BLANK - No Dimming	SMS – PIR Motion Sensor

Note: Default CCT is 2700K.

Space Light Comparison Chart

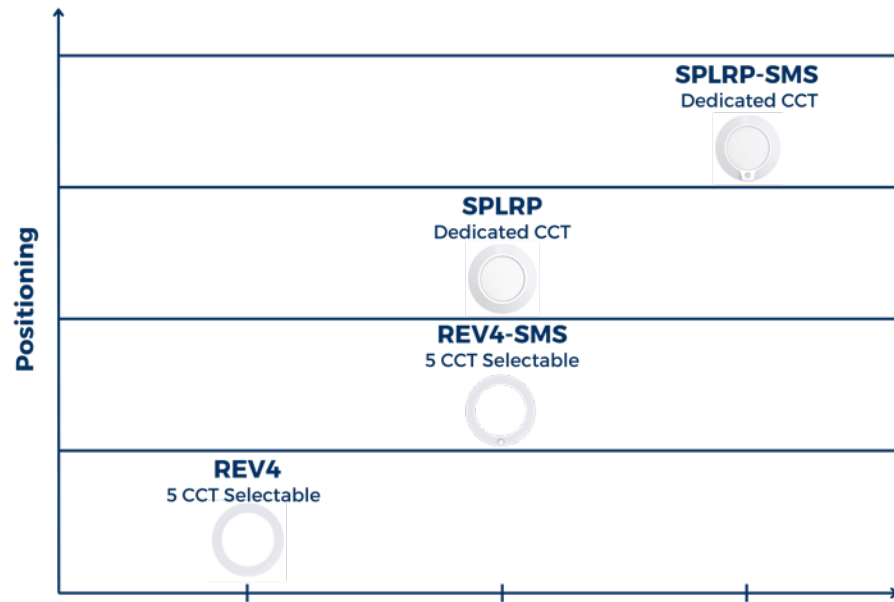

Ready to order?

We'd be happy to help.

For more information, a quote, a lighting design layout, or questions, get in touch!

Follow up:

Miguel Couto

salesupport@rabdesign.ca

layouts@rabdesign.ca

416.252.9454