



ACD

A/C Disconnect

RAB’s contractor friendly AC disconnect ensures reliable, safe, and efficient control of electrical system, enabling quick power disconnection during maintenance or emergencies. Ideal for residential, commercial, and industrial use.

IDEAL APPLICATIONS

- ✓

HVAC
- ✓

Heat Pumps
- ✓

Sump Pumps
- ✓

Electrical appliances

SPECIFICATIONS

ELECTRICAL	
Voltage	120, 240V AC
Amperage	60A
Switch Type	Pull Out
Fuse Type	Non-Fused


CONSTRUCTION	
Housing	Steel Housing
Paint Specs.	Weather and Corrosion resistant Polyester powder coat finish
Housing Finish	Light Grey
Cover	Opens upwards & locks
Lock Type	Pad lockable
Wire Size	#14-3
Terminals	Electro plated copper
Knockouts	Six - Accommodates 1/2", 3/4", and 1" conduits
Dimensions	8.77" x 5.45" x 3.18"
Weight	1.25 kgs (2.76 lbs)

ACCESSORIES SOLD SEPARATELY	
1/2", 6ft Long, Non Metallic conduit, fittings, straps w/ 3 x 10 AWG cables	
3/4", 6ft Long, Non Metallic conduit, fittings, straps w/ 3 x 8 AWG cables	

CERTIFICATIONS	
cUL Listed for Canada per CSA 22.2 No. 29 NEMA 3R	



DIMENSIONS

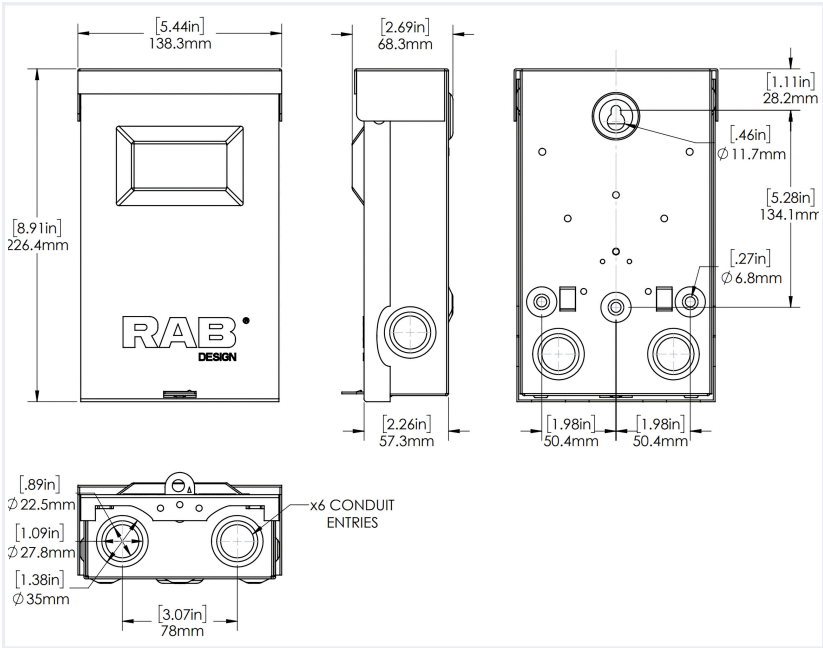

ORDERING GUIDE

STOCK CODE	DESCRIPTION
085085	ACD-60A-NF-3R

ACCESSORIES SOLD SEPARATELY		
085083	ACD-WHIP-NM-6FT-1/2IN-10AWG	
085084	ACD-WHIP-NM-6FT-3/4IN-8AWG	

