



LFY4-LED

Linear Vapourproof



Introducing our linear vapourproof LED fixture, designed for versatility and durability in demanding environments. With adjustable lumen and color temperature settings and wide voltage range ensures compatibility to suit application in industrial and commercial spaces. The fixture combines rugged construction and contractor friendly installation and advanced features to deliver reliable, tailored illumination.

IDEAL APPLICATIONS

- ✓

Food processing & Storage
- ✓

Underground Parking Garages
- ✓

Live stock barns
- ✓

Warehouse
- ✓

Agricultural applications
- ✓

Industrial application

SPECIFICATIONS

LFY4-LED40A20		LFY4-LED60A40	
PERFORMANCE			
Light Output	6400/4300/2850 lm		9100/7550/6000 lm
Efficacy	144 lm/W		151 lm/W
CCT	CCT Selectable - 3500K/4000K/5000K		
Beam Angle	113°		
CRI	84		
Replaces Up To	2 Lamp T8	2 Lamp T5HO	
ELECTRICAL			
Wattage	41/30/20 W		60/50/40 W
Voltage	120-347 V		
Surge Protection	2kV (Built-in Driver) as per IEC/EN 61000-4-5		
Power Factor	>0.96		
THD	<17%		
Dimming	0-10V (10-100% Continuous Dimming, Dim to Off)		
LED Life (L70)	> 100,000 Hrs		
LED Driver Specs	cULus certified per UL 8750; complies to FCC Part 15, ANSI C63.4, Class B		
Battery Backup	8W Battery Back Up (Optional)		
CONTROLS			
Multifunction Sensor	Dimming High Frequency Motion Sensor		
Bluetooth Control Motion Sensor (BCMS)	Microwave Motion Sensor		
AMBIENT OPERATING TEMPERATURE			
Fixture	-40°C to 40°C (-40°F to +104°F)		
With Battery Back Up	10°C to +40°C (50°F to +104°F)		
With Motion Sensor	-40°C to 40°C (-40°F to +104°F)		
With BCMS	-30°C to 40°C (-22°F to +104°F)		
DEFAULT SETTINGS			
CCT	4000K		
Wattage	41 W		60 W

CONSTRUCTION	
Housing	Polycarbonate; 5VA Flammability rated as per UL94; Outdoor rated (f1) as per UL746C
Lens	Frosted Polycarbonate; Outdoor rated (f1) as per UL746C
Clips	Stainless Steel Clips (8x) - Quick release (Standard), Mechanical release (sold separately)
Finish	Grey
Predrilled Conduit Entries	Two (one at each end); Fits PG 13.5 cable gland; suitable for upto 5x18AWG Service Cables
Guide Mark	One at Center from inside; Two adjacent to the center pilot hole
Electrical Cable lengths	1' input LED driver cable length
CERTIFICATIONS	
cETLus certified per UL1598 & CSA C22.2 NO. 250.0:21, DLC Premium, DLC Standard	
Wet Location, IP67, NEMA4X, NSF, IK10	
MOUNTING	
Surface/Ceiling/Suspension Mount	
Adjustable Stainless Steel Surface Mount Clips and Suspension Mount Hooks included in the box	

Note:

Electrical and Light Performance data is based on LM79 test report at 4000K and 120V.

This product is not suitable for Car Washes. Please see our LFW-LED series for Car Wash applications

CONTROLLED

Bluetooth



ORDERING GUIDE



Fixture	Wattage	Voltage	Colour Temp.	Dimming	Motion Sensor	Emergency Battery Backup
LFY4	LED40A20	H - 120-347V	VK- CCT Selectable - 3500K/4000K/500 0K	DIM - 0 -10V Dimming	Blank* - No Motion Sensor	Blank* - No Emergency Battery Back Up
	LED60A40				DHFS- Dimming High Frequency Motion Sensor	BBK8 - 8W Battery Back Up
					BCMS-Bluetooth Controlled Motion Sensor	

*Standard Configuration


STOCK CODE		INCLUDED IN THE BOX	
086640	LFY4-LED40A20-H-VK-DIM	STAINLESS STEEL SURFACE MOUNT INSTALLATION ACCESSORIES (X2)	
086641	LFY4-LED40A20-H-VK-DIM-DHFS		
086648	LFY4-LED40A20-H-VK-DIM-BCMS		
086660	LFY4-LED60A40-H-VK-DIM	SUSPENSION MOUNT HOOKS (X2)	
086661	LFY4-LED60A40-H-VK-DIM-DHFS		
086649	LFY4-LED60A40-H-VK-DIM-BCMS		

ACCESSORY SOLD SEPARATELY			
087016	RC-100 MOTION SENSOR REMOTE CONTROL		084088 LFY4-LED SST CLIPS KIT (x8) - MECHANICAL RELEASE
086645	LFY4 WALL MOUNT BRACKET		089814 LINEAR CEILING PENDANT MOUNT KIT (2x5ft)


MAX AMPERAGE DRAW (A)						LUMEN MAINTENANCE			
	120V	208V	240V	277V	347V		L90	L80	L70
LFY4-LED40A20	0.359	0.207	0.179	0.155	0.124	LFY4-LED40A20	55,000 Hrs	100,000 Hrs	> 100,000 Hrs
LFY4-LED60A40	0.525	0.303	0.263	0.227	0.182	LFY4-LED60A40	52,000 Hrs	100,000 Hrs	> 100,000 Hrs

Life hours are derived from IESNA LM-80 testing report and projected per IESNA TM-21 calculations.


DIMENSIONS

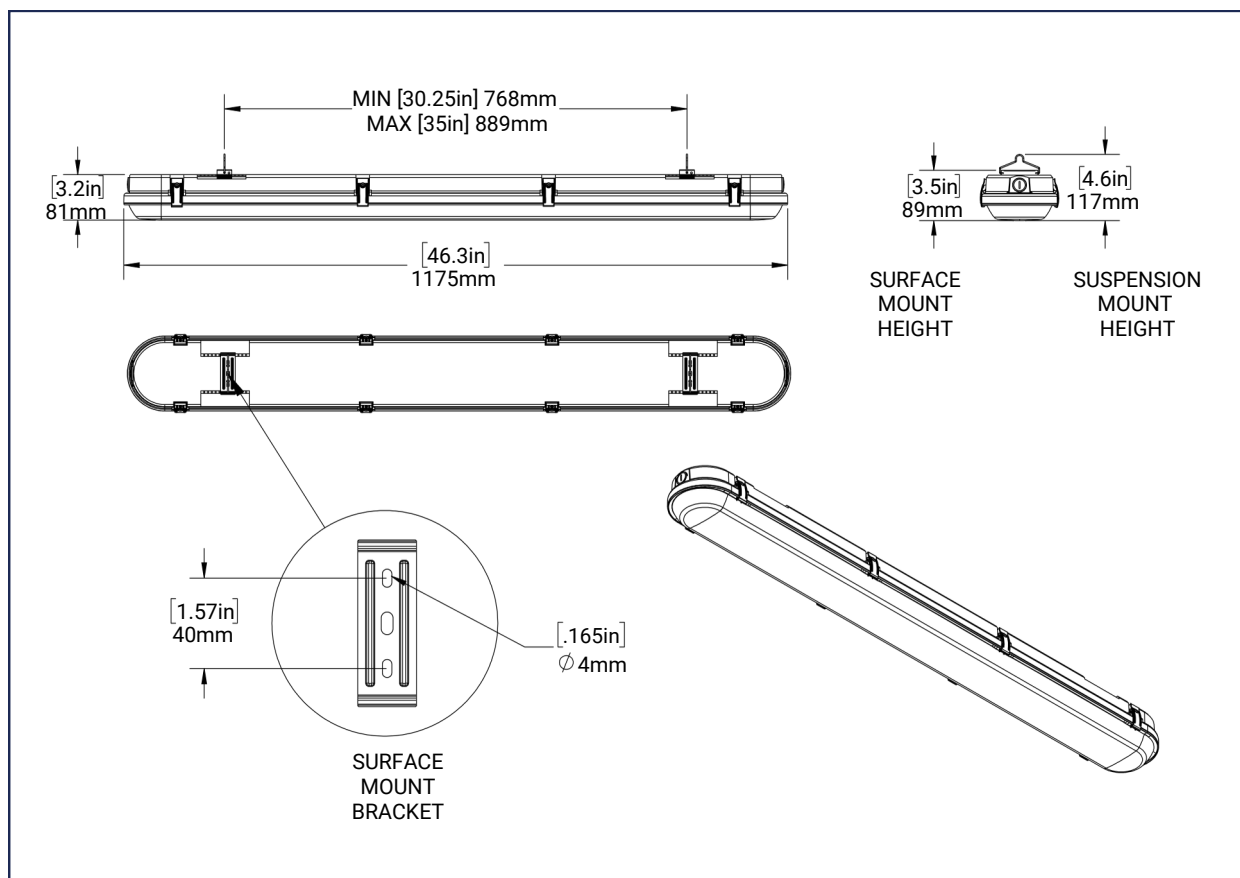

WALL MOUNT BRACKET

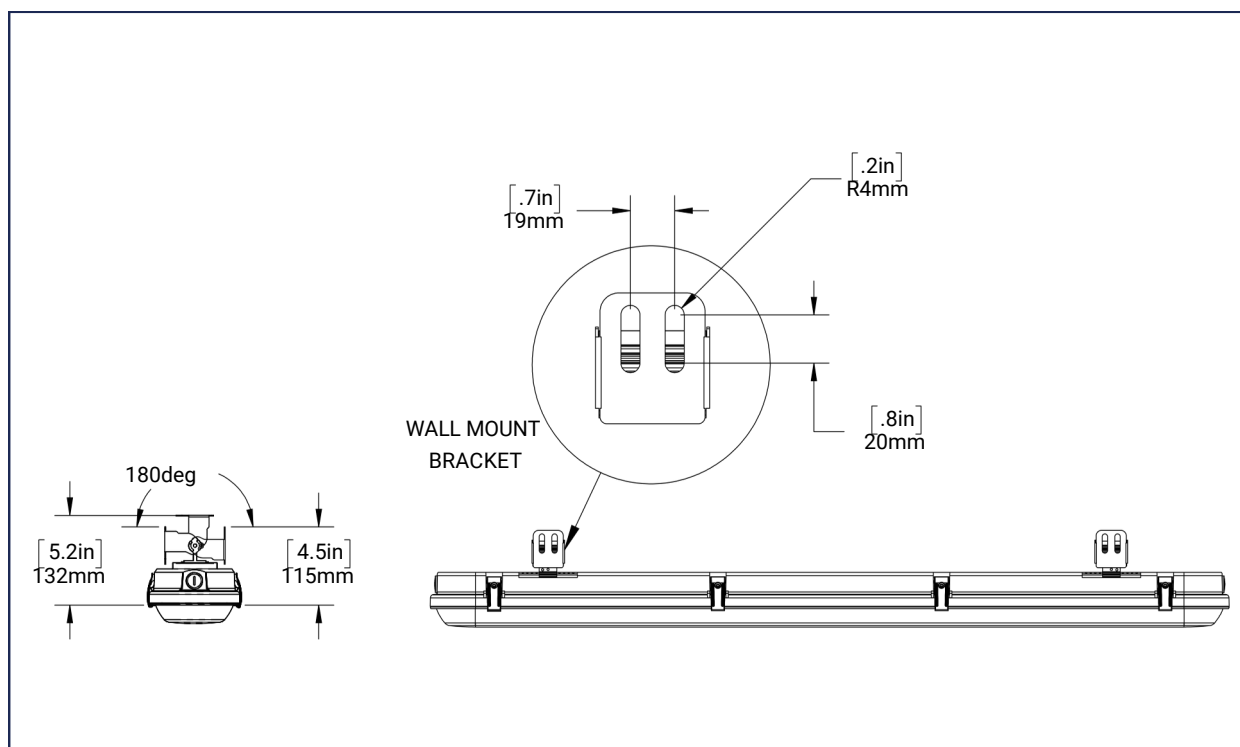

DIMMING HIGH FREQUENCY MOTION SENSOR SPECIFICATIONS

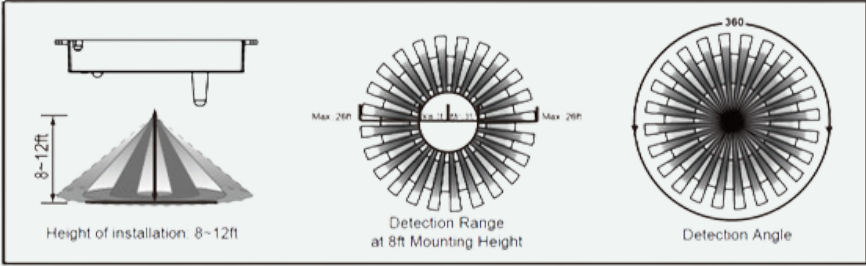Features	Microwave motion sensing, Sensor sensitivity adjustment, Bi-Level Dimming and Daylight Sensing. Control settings using DIP Switch or Optional Remote (RC-100)
Maximum Mounting Height/Range	 <p>Height of installation: 8~12ft</p> <p>Detection Range at 8ft Mounting Height</p> <p>Detection Angle</p>
Maximum Detection Angle	360°
Recommended Mounting Height	8ft to 12ft
Sensor Detection Range	26ft at 8ft mounting

Note: Applicable to light fixtures with Dimming High Frequency Motion Sensor (DHFS).

DEFAULT MOTION SENSOR SETTINGS

BRIGHTNESS	SENSITIVITY	HOLD TIME	DAYLIGHT SENSOR	STAND-BY DIM	STAND-BY TIME
100%	100%	10 Seconds	Disabled	DIM: 50%	60 minutes


EMERGENCY BATTERY BACKUP SPECIFICATIONS

Rated Input Voltage	100-347 VAC, 50/60HZ
Input current	20-100mA
Input power	8W
Power Factor	0.6 @ 100VAC, 0.5 @347 VAC
Output Power (Emergency Mode)	9W±10%, Constant Power
Recharge Current	0-200mA
Recharge Time	24 Hours
Discharge Time	90 Minutes
Maximum Case Temperature	70°C
Ambient Operating Temperature	10°C-60°C

Note:

Lumen output with emergency battery backup can be calculated by multiplying battery power output with efficacy of fixture.

CONTROLLED

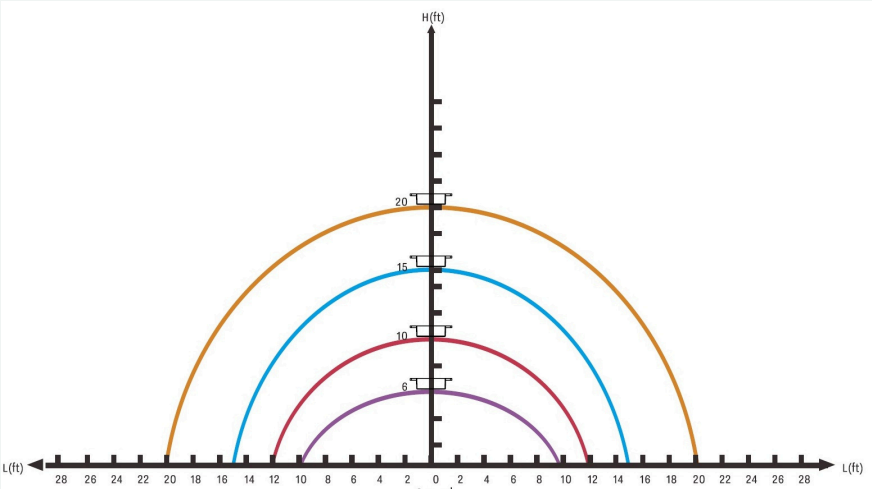
BLUETOOTH CONTROLLED MOTION SENSOR SPECIFICATIONS	
Features	Microwave motion sensing, Sensor sensitivity adjustment, Bi-Level Dimming and Scheduling. Control sensor setting using ControlLED app.
Maximum Mounting Height/Range	
Maximum Detection Angle	360°
Recommended Mounting Height	8ft to 20ft
Motion Sensor Detection Range	20-40ft (depending on mounting height)
Maximum Case Temperature	85°C
Ambient Operating Temperature	-30°C-55°C
Sinking Current	10mA Max
Bluetooth Transmit	200ft Max; 800ft Max (with optional Factory Installed Antenna)
Technology	Bluetooth v5.0
Radio Frequency	2.4GHz ± 75MHz
Compliance	UL8750, UL1376, RoHS, FCC

Note: Applicable to light fixtures with Bluetooth Controlled Motion Sensors (BCMS)

CONTROLLED

RAB[®]
DESIGN


ControlLED Network Lighting Controls (NLC) delivers secure, wireless lighting management with Bluetooth Mesh and the ControlLED App. Integrated sensors enable automatic adjustments for comfort, safety, and efficiency.

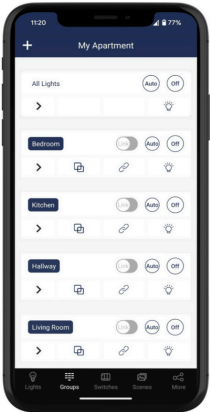

Organized Workspaces:
Create Zones, Groups and Group linkages.




Dimming Lights:
Set dim level for groups or individual lights.

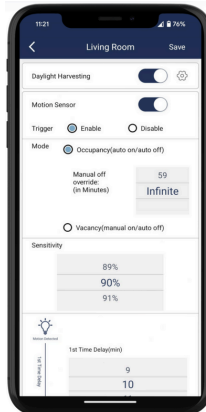


Motion and Daylight Harvest Sensors:
Custom sensor settings for groups or individual lights.



Scenes:
Create custom scenes for different scenarios.

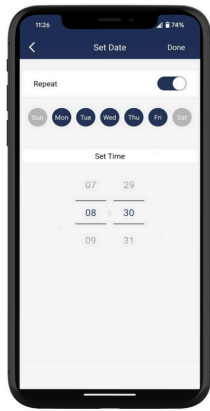

Schedules:
Create custom schedules for recurring events.

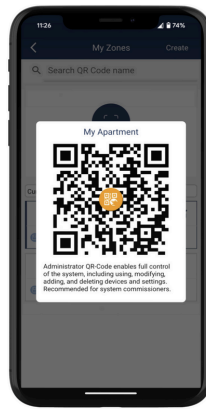

Share Access:
Share access using QR codes.

Get the App!



RAB[®]
DESIGN

**Engineered by skilled hands,
for skilled hands.**


© RAB Design Lighting Inc. 2025. All rights reserved.
For more information, visit rabdesign.ca.

PHOTOMETRIC PLOTS

LFY4-LED40A20-H-VK-DIM (5000K 120V)
MOUNTED AT 8 FEET

LUMENS 6035

MAX CALCULATED VALUE 30.35Fc

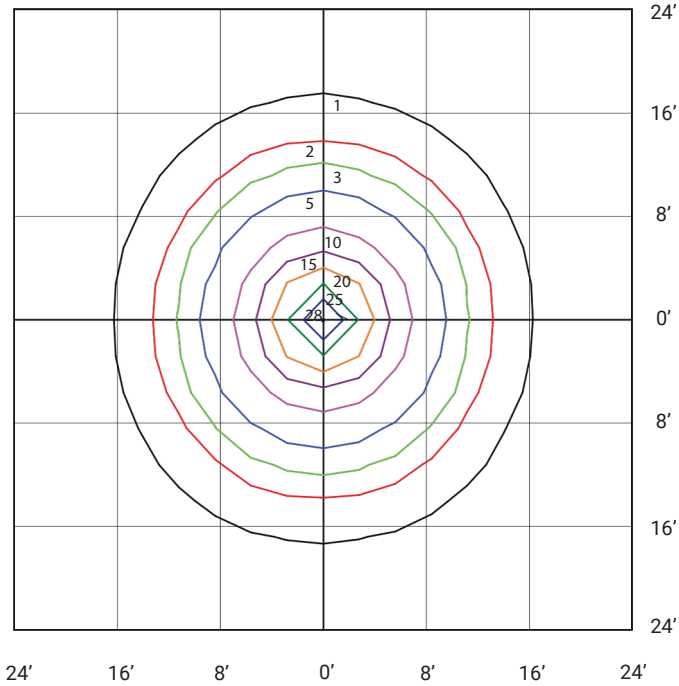

LFY4-LED60A40-H-VK-DIM (5000K 120V)
MOUNTED AT 10 FEET

LUMENS 8839

MAX CALCULATED VALUE 28.29Fc

