



LFY4-LED

Linear Vapourproof

Introducing our linear vapourproof LED fixture, designed for versatility and durability in demanding environments. With adjustable lumen and color temperature settings and wide voltage range ensures compatibility to suit application in industrial and commercial spaces. The fixture combines rugged construction and contractor friendly installation and advanced features to deliver reliable, tailored illumination.

IDEAL APPLICATIONS

- Food processing & Storage
- Live stock barns
- Agricultural applications
- Underground Parking Garages
- Warehouse
- Industrial application

SPECIFICATIONS

	LFY4-LED40A20	LFY4-LED60A40	CONSTRUCTION
PERFORMANCE			
Light Output	6400/4300/2850 lm	9100/7550/6000 lm	Housing
Efficacy	144 lm/W	151 lm/W	Lens
CCT	CCT Selectable - 3500K/4000K/5000K		Clips
Beam Angle	113°		Finish
CRI	84		
Replaces Up To	2 Lamp T8	2 Lamp T5HO	Predrilled Conduit Entries
ELECTRICAL			
Wattage	41/30/20 W	60/50/40 W	Guide Mark
Voltage	120-347 V		Electrical Cable lengths
Surge Protection	2kV (Built-in Driver) as per IEC/EN 61000-4-5		
Power Factor	>0.96		
THD	<17%		
Dimming	0-10V (10-100% Continuous Dimming, Dim to Off)		
LED Life (L70)	> 100,000 Hrs		
LED Driver Specs	cULus certified per UL 8750; complies to FCC Part 15, ANSI C63.4, Class B		
Battery Backup	8W Battery Back Up (Optional)		
CONTROLS			
Multifunction Sensor	Dimming High Frequency Motion Sensor		
Bluetooth Control Motion Sensor (BCMS)	Microwave Motion Sensor		
AMBIENT OPERATING TEMPERATURE			
Fixture	-40°C to 40°C (-40°F to +104°F)		
With Battery Back Up	10°C to +40°C (50°F to +104°F)		
With Motion Sensor	-40°C to 40°C (-40°F to +104°F)		
With BCMS	-30°C to 40°C (-22°F to +104°F)		
DEFAULT SETTINGS			
CCT	4000K		
Wattage	41 W	60 W	
NOTE:			
Electrical and Light Performance data is based on LM79 test report at 4000K and 120V.			
This product is not suitable for Car Washes. Please see our LFW-LED series for Car Wash applications			
MOUNTING			
Surface/Ceiling/Suspension Mount			
Adjustable Stainless Steel Surface Mount Clips and Suspension Mount Hooks included in the box			

CONTROLLED **Bluetooth**



ORDERING GUIDE



Fixture	Wattage	Voltage	Colour Temp.	Dimming	Motion Sensor	Emergency Battery Backup
LFY4	LED40A20	H - 120-347V	VK- CCT Selectable - 3500K/4000K/500 0K	DIM - 0 -10V Dimming	Blank* - No Motion Sensor	Blank* - No Emergency Battery Back Up
	LED60A40				DHFS- Dimming High Frequency Motion Sensor	BBK8 - 8W Battery Back Up
					BCMS-Bluetooth Controlled Motion Sensor	

*Standard Configuration

STOCK CODE		INCLUDED IN THE BOX
086640	LFY4-LED40A20-H-VK-DIM	
086641	LFY4-LED40A20-H-VK-DIM-DHFS	STAINLESS STEEL SURFACE MOUNT INSTALLATION ACCESSORIES (X2)
086648	LFY4-LED40A20-H-VK-DIM-BCMS	
086660	LFY4-LED60A40-H-VK-DIM	
086661	LFY4-LED60A40-H-VK-DIM-DHFS	SUSPENSION MOUNT HOOKS (X2)
086649	LFY4-LED60A40-H-VK-DIM-BCMS	


ACCESSORY SOLD SEPARATELY					
087016	RC-100 MOTION SENSOR REMOTE CONTROL		084088	LFY4-LED SST CLIPS KIT (x8) - MECHANICAL RELEASE	
086645	LFY4 WALL MOUNT BRACKET		089814	LINEAR CEILING PENDANT MOUNT KIT (2x5ft)	
084633	BLUETOOTH 5-KEY BATTERY POWERED WIRELESS WALL SWITCH & PLATE ¹				

¹ Wireless Bluetooth module can also be used as portable remote control.


	MAX AMPERAGE DRAW (A)					LUMEN MAINTENANCE			
	120V	208V	240V	277V	347V		L90	L80	L70
LFY4-LED40A20	0.359	0.207	0.179	0.155	0.124	LFY4-LED40A20	55,000 Hrs	100,000 Hrs	> 100,000 Hrs
LFY4-LED60A40	0.525	0.303	0.263	0.227	0.182	LFY4-LED60A40	52,000 Hrs	100,000 Hrs	> 100,000 Hrs

Life hours are derived from IESNA LM-80 testing report and projected per IESNA TM-21 calculations.


DIMENSIONS

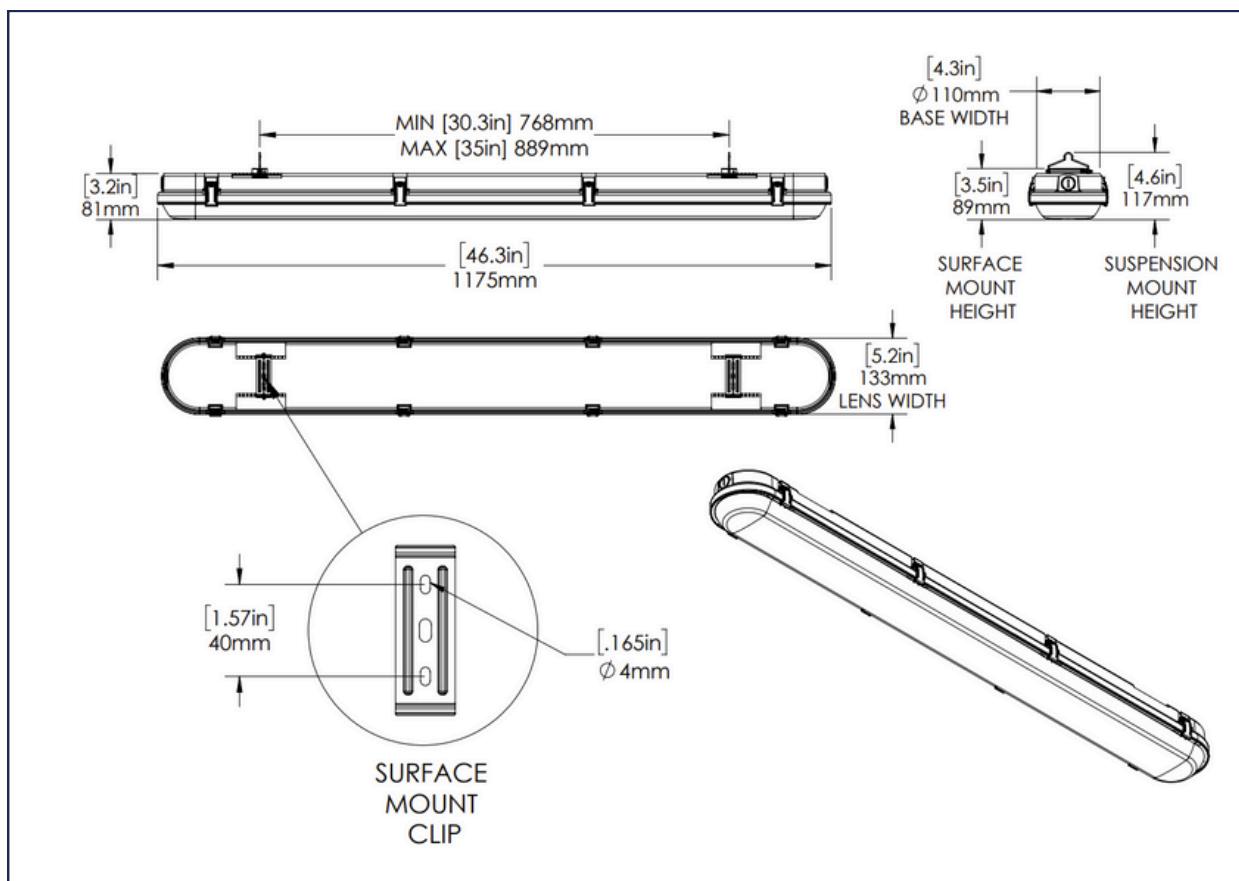

WALL MOUNT BRACKET

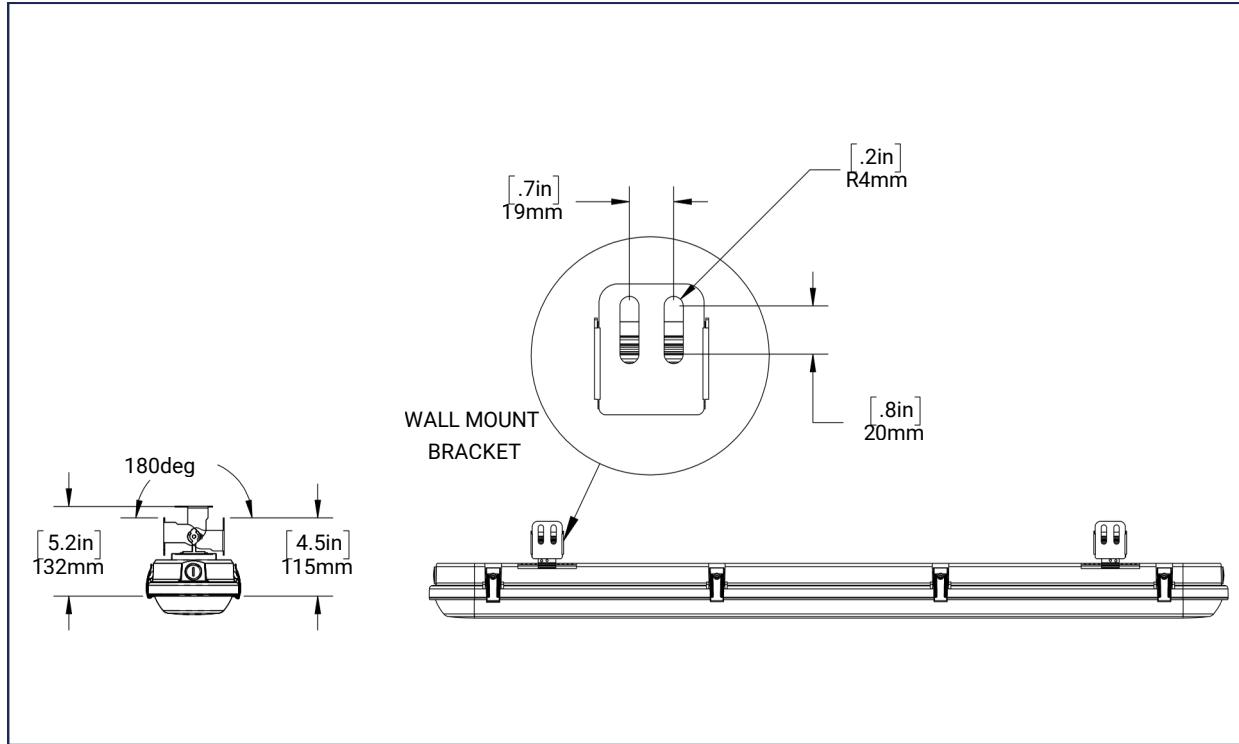

DIMMING HIGH FREQUENCY MOTION SENSOR SPECIFICATIONS

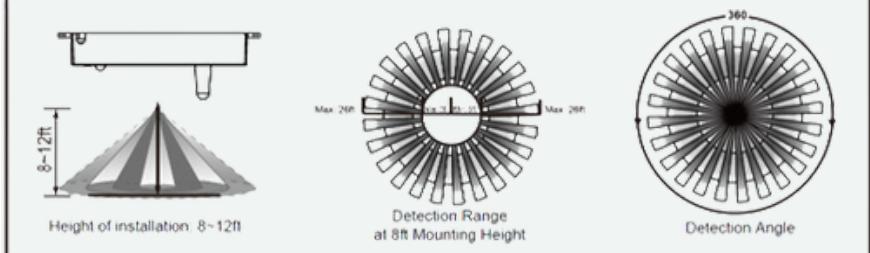Features	Microwave motion sensing, Sensor sensitivity adjustment, Bi-Level Dimming and Daylight Sensing. Control settings using DIP Switch or Optional Remote (RC-100)
Maximum Mounting Height/Range	
Maximum Detection Angle	360°
Recommended Mounting Height	8ft to 12ft
Sensor Detection Range	26ft at 8ft mounting

Note: Applicable to light fixtures with Dimming High Frequency Motion Sensor (DHFS).

DEFAULT MOTION SENSOR SETTINGS

BRIGHTNESS	SENSITIVITY	HOLD TIME	DAYLIGHT SENSOR	STAND-BY DIM	STAND-BY TIME
100%	100%	10 Seconds	Disabled	DIM: 50%	60 minutes

EMERGENCY BATTERY BACKUP SPECIFICATIONS

Rated Input Voltage	100-347 VAC, 50/60HZ
Input current	20-100mA
Input power	8W
Power Factor	0.6 @ 100VAC, 0.5 @347 VAC
Output Power (Emergency Mode)	9W±10%, Constant Power
Recharge Current	0-200mA
Recharge Time	24 Hours
Discharge Time	90 Minutes
Maximum Case Temperature	70°C
Ambient Operating Temperature	10°C-60°C

Note:

Lumen output with emergency battery backup can be calculated by multiplying battery power output with efficacy of fixture.

CONTROLLED


BLUETOOTH CONTROLLED MOTION SENSOR SPECIFICATIONS

Features	Microwave motion sensing, Sensor sensitivity adjustment, Bi-Level Dimming and Scheduling. Control sensor setting using ControlLED app.
Maximum Mounting Height/Range	
Maximum Detection Angle	360°
Recommended Mounting Height	8ft to 20ft
Motion Sensor Detection Range	20-40ft (depending on mounting height)
Maximum Case Temperature	85°C
Ambient Operating Temperature	-30°C-55°C
Sinking Current	10mA Max
Bluetooth Transmit	200ft Max; 800ft Max (with optional Factory Installed Antenna)
Technology	Bluetooth v5.0
Radio Frequency	2.4GHz ± 75MHz
Compliance	UL8750, UL1376, RoHS, FCC

Note: Applicable to light fixtures with Bluetooth Controlled Motion Sensors (BCMS)

CONTROLLED

ControlLED Network Lighting Controls (NLC) delivers secure, wireless lighting management with Bluetooth Mesh and the ControlLED App. Integrated sensors enable automatic adjustments for comfort, safety, and efficiency.

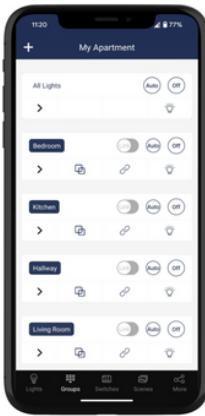

Organized Workspaces:
Create Zones, Groups and Group linkages.



Dimming Lights:
Set dim level for groups or individual lights.



Motion and Daylight Harvest Sensors:
Custom sensor settings for groups or individual lights.



Scenes:
Create custom scenes for different scenarios.



Schedules:
Create custom schedules for recurring events.



Share Access:
Share access using QR codes.

RAB
DESIGN®

Get the App!




RAB
DESIGN®

Engineered by skilled hands,
for skilled hands.

© RAB Design Lighting Inc. 2025. All rights reserved.
For more information, visit rabdesign.ca.

PHOTOMETRIC PLOTS

LFY4-LED40A20-H-VK-DIM (5000K 120V)
MOUNTED AT 8 FEET

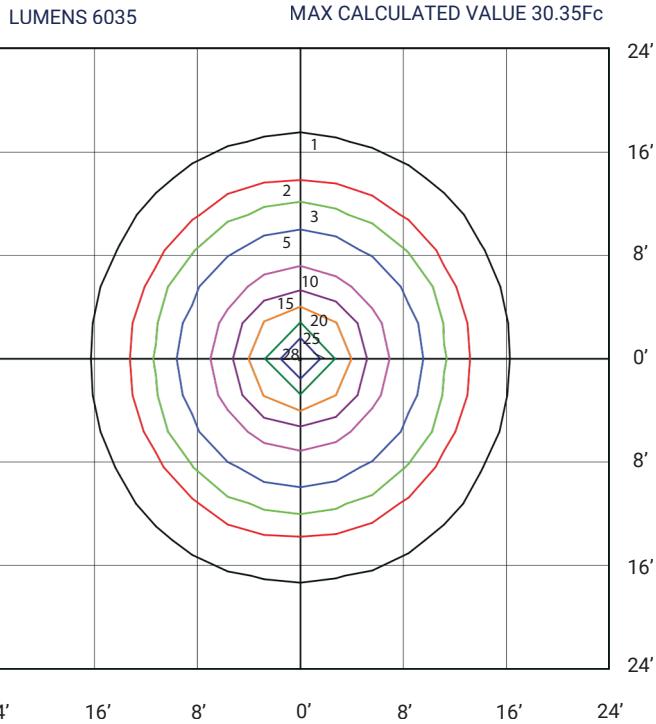

LFY4-LED60A40-H-VK-DIM (5000K 120V)
MOUNTED AT 10 FEET

