



## DVAKSX-LED14

### Ceiling Mount LED Vapourproof



#### IDEAL APPLICATIONS

<input checked="" type="checkbox"/>	Entrances	<input checked="" type="checkbox"/>	Stairways	<input checked="" type="checkbox"/>	Elevator Shafts
<input checked="" type="checkbox"/>	Restaurants	<input checked="" type="checkbox"/>	Tunnels	<input checked="" type="checkbox"/>	Service Areas

#### DESCRIPTION:

The DVAKSX-LED14 is a versatile fixture that can be used in industrial and architectural applications. The fixture is available in custom colors and has a variety of globe and guard accessories.

#### FEATURES:

- Sleek, modern look with the same ruggedness as the original DVAKS fixture.
- 10 minute retrofit. Retrofits to existing 4" round/octagon boxes.
- Polycarbonate lens can be easily replaced with glass globe and guard to provide a different look.
- Precision die cast aluminum housing with powder coat paint finish for industrial and architectural applications.
- Grey polyester powder coat paint finish for protection against oxidization
- Five 1/2" NPS conduit entries.

**Note:** Not for use in hazardous locations.

SPECIFICATIONS		DVAKSX-LED14
Watts*		13.6W
Lumens*		1644 Lm
Efficacy *		120.5 Lm/W
Voltage		120-277V
Replaces Up To		100W Incandescent / 36W CFL Vaporproof Fixture
Colour Temp		5000K, 4000K, 3000K
Dimming		0-10V Dim to Off
PF*		0.96
CRI		83
LED Life (L70)		>100,000 Hours
Temperature Rating		+40°C max ambient
Housing Material		Aluminum
Lens		Frosted Polycarbonate Lens
Mounting		Ceiling Mount
Certifications		ETL, DLC 5.1 Standard

\*Tested data for 3000K



## ACCESSORIES

RAB Design carries a diverse line of durable and cost efficient glass globes. They come in various finishes, which include impregnated colors.

### GLASS GLOBES OPTIONS (SOLD SEPARATELY)



GL100  
CLEAR GLASS



GL100F  
FROSTED GLASS



RGL100A  
AMBER



RGL100B  
BLUE



RGL100G  
GREEN



RGL100R  
RED

### GD100CGS CAST GUARD (SOLD SEPARATELY)



#### FEATURES

- Heavy duty raw/painted cast guard for use with RAB Design Vapourproof fixtures.
- Machined threads for smooth fit to RAB Design fixtures.
- Set screw to lock guard securely to fixture.



DVAKSX-LED14 shown with GD100CGS Cast Guard and GL100F Frosted Glass.


## SPECIFICATIONS

Model Number	Voltage (V)	Power (W)	Light Output (lm)	Efficacy (lm/W)	THD (%)	PF	CCT (K)	B-U-G
DVAKSX-LED14-B-3K-DGY-DIM-FR-CM	120-277	13.51	1590	117.7	11.3	0.95	3000	84
DVAKSX-LED14-B-4K-DGY-DIM-FR-CM	120-277	13.58	1617	119.1	10.2	0.96	4000	84

## LEGEND

B- 120-277V  
 3K - 3000K, 4K-4000K  
 DGY - Dove Gray  
 DIM - 0-10V Dimming  
 FR - Frosted Lens  
 WM - WallMount

## DIMENSIONS

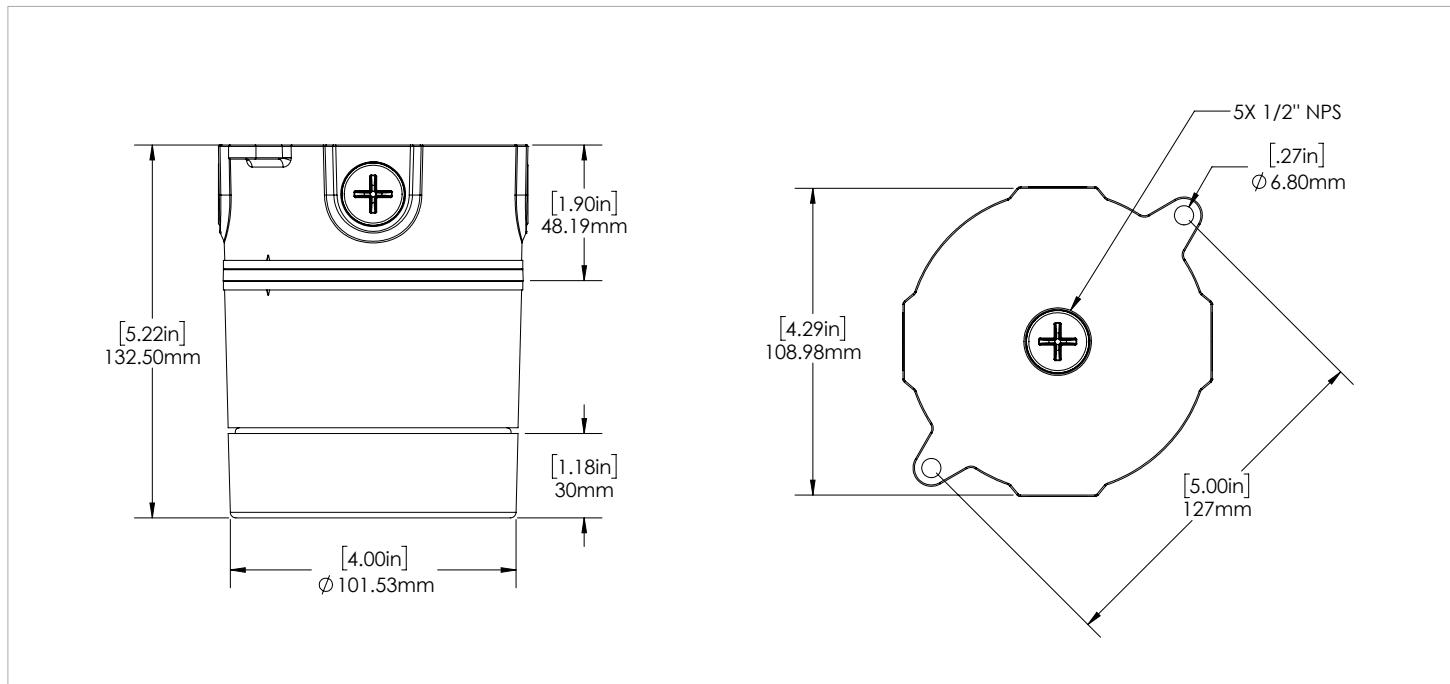

## MOUNTING OPTIONS

This fixture series is also available in **wall mount** or **pendant mount**.



## ORDERING GUIDE:

DVAKSX	LED14	B	DIM	FR	CM	
Fixture	Wattage	Voltage	Color Temp.	Finish	Lens	Mounting
LED14		B - 120-277V	5K -5000K*	DGY - Dove Grey*	DIM - 0-10V Dimming	FR - Frosted Lens
			4K - 4000K	CC - Custom Colours		
			3K - 3000K			

\* Standard Configuration

### FIELD INSTALLED ACCESSORIES:

#### CHECK THE ACCESSORIES YOU WISH TO ORDER:



Cast Guard - Raw Finish GD100CGS



Cast Guard - Dove Gray Finish GD100CGS-DGY



GL100 Clear Glass



GL100F Frosted Glass



RGL100A Amber



RGL100B Blue



RGL100G Green



RGL100R Red