



## DVBKSX-LED14

Wall Mount LED Vaporproof



### IDEAL APPLICATIONS

<input checked="" type="checkbox"/>	Entrances	<input checked="" type="checkbox"/>	Stairways	<input checked="" type="checkbox"/>	Elevator Shafts
<input checked="" type="checkbox"/>	Restaurants	<input checked="" type="checkbox"/>	Tunnels	<input checked="" type="checkbox"/>	Service Areas

### DESCRIPTION:

The DVBKSX-LED14 is a versatile fixture that can be used in industrial and architectural applications. The fixture is available in custom colors and has a variety of globe and guard accessories.

### FEATURES:

- Sleek, modern look with the same ruggedness as the original DVBKS fixture.
- 10 minute retrofit. Retrofits to existing 4" round/octagon boxes.
- Polycarbonate lens can be easily replaced with glass globe and guard to provide a different look.
- Precision die cast aluminum housing with powder coat paint finish for industrial and architectural applications.
- Grey polyester powder coat paint finish for protection against oxidization
- Five 1/2" NPS conduit entries.

**Note:** Not for use in hazardous locations.

SPECIFICATIONS		DVBKSX-LED14
Watts*		13.6W
Lumens*		1644 Lm
Efficacy *		120.5 Lm/W
Voltage		120-277V
Replaces Up To		100W Incandescent / 36W CFL Vaporproof Fixture
Colour Temp		5000K, 4000K, 3000K
Dimming		0-10V Dim to Off
PF*		0.96
CRI		83
LED Life (L70)		>100,000 Hours
Temperature Rating		+40°C max ambient
Housing Material		Aluminum
Lens		Frosted Polycarbonate Lens
Mounting		Wall Mount
Certifications		ETL, DLC 5.1 Standard

\*Tested data for 3000K



## ACCESSORIES

RAB Design carries a diverse line of durable and cost efficient glass globes. They come in various finishes, which include impregnated colors.

### GLASS GLOBES OPTIONS (SOLD SEPARATELY)



GL100  
CLEAR GLASS



GL100F  
FROSTED GLASS



RGL100A  
AMBER



RGL100B  
BLUE



RGL100G  
GREEN



RGL100R  
RED

### GD100CGS CAST GUARD (SOLD SEPARATELY)



#### FEATURES

- Heavy duty raw/painted cast guard for use with RAB Design Vapourproof fixtures.
- Machined threads for smooth fit to RAB Design fixtures.
- Set screw to lock guard securely to fixture.



DVBKSX-LED14 shown with GD100CGS Cast Guard and GL100F Frosted Glass.


## SPECIFICATIONS

Model Number	Voltage (V)	Power (W)	Light Output (lm)	Efficacy (lm/W)	THD (%)	PF	CCT (K)	B-U-G
DVBKSX-LED14-B-3K-DGY-DIM-FR-WM	120-277	13.51	1590	117.7	11.3	0.95	3000	84
DVBKSX-LED14-B-4K-DGY-DIM-FR-WM	120-277	13.58	1617	119.1	10.2	0.96	4000	84

## LEGEND

B- 120-277V  
3K - 3000K, 4K-4000K  
DGY - Dove Gray  
DIM - 0-10V Dimming  
FR - Frosted Lens  
WM - WallMount

## DIMENSIONS

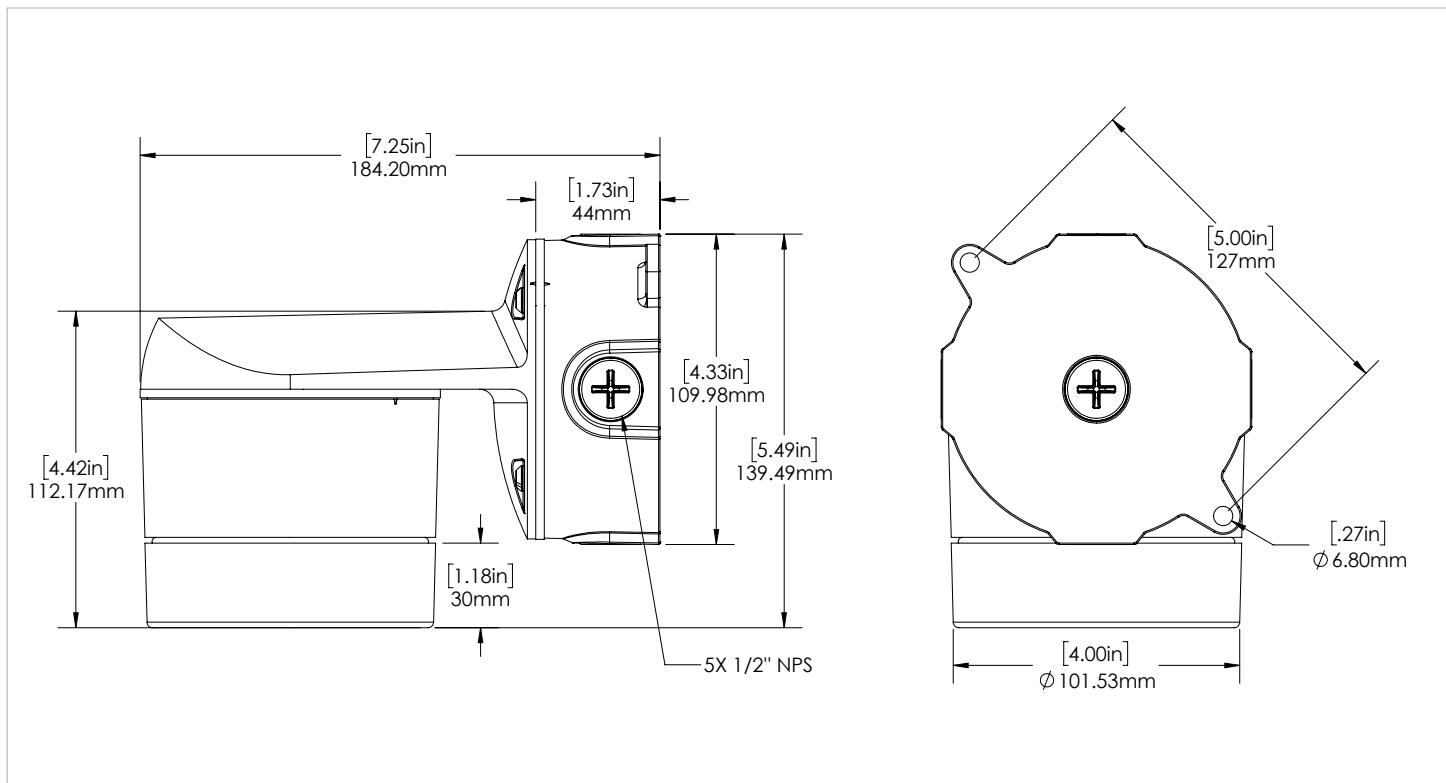

## MOUNTING OPTIONS

This fixture series is also available in **ceiling mount** or **pendant mount**.



**Ceiling Mount**  
[See DVAKSX-LED14 Spec Sheet](#)



**Pendant Mount**  
[See DVCSX-LED14 Spec Sheet](#)

## ORDERING GUIDE:

DVBKSX	LED14	B			DIM	FR	WM
Fixture	Wattage	Voltage	Color Temp.	Finish	Dimming	Lens	Mounting
	LED14	B - 120-277V	5K - 5000K*	DGY - Dove Grey*	DIM - 0-10V Dimming	FR - Frosted Lens	WM - Wall Mount
			4K - 4000K	CC - Custom Colours			
			3K - 3000K				

\*Standard Configuration

### FIELD INSTALLED ACCESSORIES:

CHECK THE ACCESSORIES YOU WISH TO ORDER:



Cast Guard - Raw Finish GD100CGS



Cast Guard - Dove Gray Finish GD100CGS-DGY



GL100 Clear Glass



GL100F Frosted Glass



RGL100A Amber



RGL100B Blue



RGL100G Green



RGL100R Red