



DVCSX-LED14

Pendant Mount LED Vapourproof



IDEAL APPLICATIONS

<input checked="" type="checkbox"/> Entrances	<input checked="" type="checkbox"/> Stairways	<input checked="" type="checkbox"/> Elevator Shafts
<input checked="" type="checkbox"/> Restaurants	<input checked="" type="checkbox"/> Tunnels	<input checked="" type="checkbox"/> Service Areas

DESCRIPTION:

The DVCSX-LED14 is a versatile fixture that can be used in industrial and architectural applications. The fixture is available in custom colors and has a variety of globe and guard accessories.

FEATURES:

- Sleek, modern look with the same ruggedness as the original DVCS fixture.
- 10 minute retrofit. Retrofits to existing 4" round/octagon boxes.
- Polycarbonate lens can be easily replaced with glass globe and guard to provide a different look.
- Precision die cast aluminum housing with powder coat paint finish for industrial and architectural applications.
- Grey polyester powder coat paint finish for protection against oxidization
- Five 1/2" NPS conduit entries.

Note: Not for use in hazardous locations.

SPECIFICATIONS		DVCSX-LED14
Watts*		13.6W
Lumens*		1644 Lm
Efficacy *		120.5 Lm/W
Voltage		120-277V
Replaces Up To		100W Incandescent / 36W CFL Vaporproof Fixture
Colour Temp		5000K, 4000K, 3000K
Dimming		0-10V Dim to Off
PF*		0.96
CRI		83
LED Life (L70)		>100,000 Hours
Temperature Rating		+40°C max ambient
Housing Material		Aluminum
Lens		Frosted Polycarbonate Lens
Mounting		Pendant Mount
Certifications		ETL, DLC 5.1 Standard

*Tested data for 3000K



ACCESSORIES

RAB Design carries a diverse line of durable and cost efficient glass globes. They come in various finishes, which include impregnated colors.

GLASS GLOBES OPTIONS (SOLD SEPARATELY)



GL100
CLEAR GLASS



GL100F
FROSTED GLASS



RGL100A
AMBER



RGL100B
BLUE



RGL100G
GREEN



RGL100R
RED

GD100CGS CAST GUARD (SOLD SEPARATELY)



FEATURES

- Heavy duty raw/painted cast guard for use with RAB Design Vapourproof fixtures.
- Machined threads for smooth fit to RAB Design fixtures.
- Set screw to lock guard securely to fixture.



DVCSX-LED14 shown with GD100CGS Cast Guard and GL100F Frosted Glass.


SPECIFICATIONS

Model Number	Voltage (V)	Power (W)	Light Output (lm)	Efficacy (lm/W)	THD (%)	PF	CCT (K)	B-U-G
DVCSX-LED14-B-3K-DGY-DIM-FR-PM	120-277	13.51	1590	117.7	11.3	0.95	3000	84
DVCSX-LED14-B-4K-DGY-DIM-FR-PM	120-277	13.58	1617	119.1	10.2	0.96	4000	84

LEGEND


B - 120-277V
 3K - 3000K, 4K-4000K
 DGY - Dove Gray
 DIM - 0-10V Dimming
 FR - Frosted Lens
 PM - Pendant Mount

DIMENSIONS

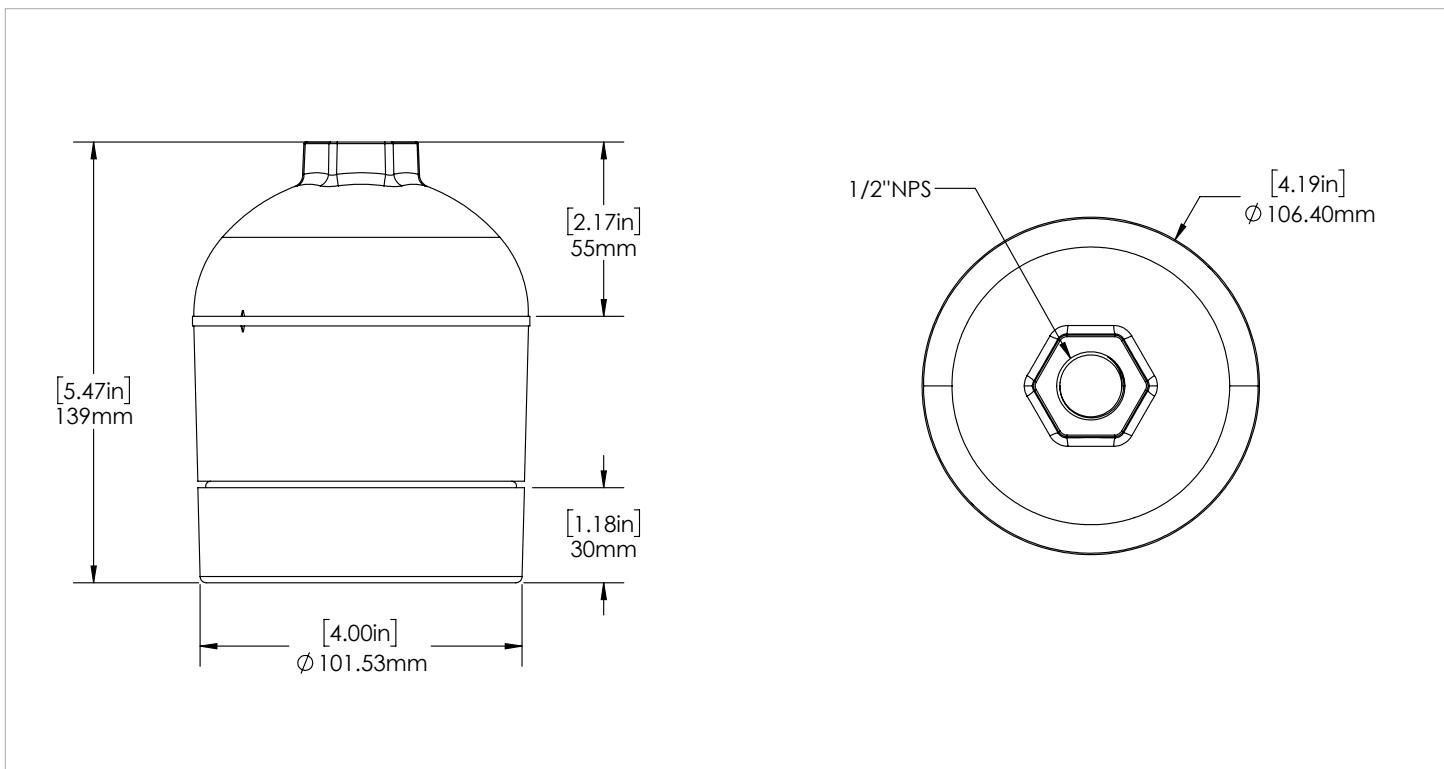

MOUNTING OPTIONS

This fixture series is also available in **ceiling mount** or **wall mount**.

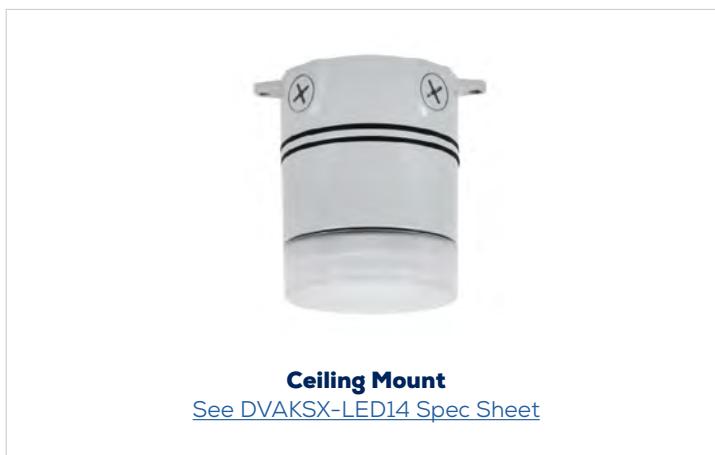

Ceiling Mount
[See DVAKSX-LED14 Spec Sheet](#)



Wall Mount
[See DVBKSX-LED14 Spec Sheet](#)

ORDERING GUIDE:

DVCSX	LED14	B			DIM	FR	PM
Fixture	Wattage	Voltage	Colour Temp.	Finish	Dimming	Lens	Mounting
	LED14	B - 120-277V	5K - 5000K*	DGY - Dove Grey*	DIM - 0-10V Dimming	FR - Frosted Lens	PM - Pendant Mount
			4K - 4000K	CC - Custom Colours			
			3K - 3000K				

* Standard Configuration

FIELD INSTALLED ACCESSORIES:

CHECK THE ACCESSORIES YOU WISH TO ORDER:



Cast Guard - Raw Finish GD100CGS



Cast Guard - Dove Gray Finish GD100CGS-DGY



GL100 Clear Glass



GL100F Frosted Glass



RGL100A Amber



RGL100B Blue



RGL100G Green



RGL100R Red