



DVCS2-LED26

Vapourproof Fixture



IDEAL APPLICATIONS

- Industrial Applications
- Service Areas
- Architectural Applications
- Entrances

DESCRIPTION:

The DVCS2 is the 26W energy efficient LED vapourproof fixture that can be used for industrial and architectural applications. This series of fixtures comprises the DVAKS2-LED which can be ceiling mounted, the DVBKS2-LED which can be wall mounted and the DVCS2-LED which can be pendant mounted.

FEATURES:

Construction

- Precision die cast aluminum housing with durable chip and natural aluminum finish. Highly efficient heat sink design maintains the junction temperature significantly below the recommended maximum ratings ensuring extended fixture life. Frosted lens is standard. The fixture is rated IP66 and suitable for outdoor use.

Electrical

- Total system wattage of the unit is 26W. The standard unit has a high efficiency driver that operates at 120 - 277V.

LED Configuration

- The DVCS2-LED has an LED array that has a lumen output of minimum 3000 lumens. The LEDs have a standard colour temperature of 5000K. 3000K or 4000K available as options. The LEDs have a CRI of greater than 72 and an operating temperature range of -40°C to +40°C.

Finish

- Standard finish is Natural aluminum.

Accessories


- Various Globe and Guard Accessories sold separately

| SPECIFICATIONS | | DVCS2-LED26 |
|-----------------------|--|----------------------------------|
| Watts | | 25.73W |
| Lumens | | 3008lm |
| Efficacy | | 116.91lm/W |
| Voltage | | 120-277V |
| CCT (K) | | 3000K,4000K,5000K* |
| CRI | | 72.2 |
| Dimming | | 0-10V Dim to Off |
| THD | | 9.16% |
| PF | | 0.9785 |
| LED Life (L80) | | >60000 hours |
| Housing Finish | | Natural Aluminum |
| Housing Details | | Die Cast Aluminum |
| Lens Details | | Frosted Lens |
| Mounting | | Pendant Mount |
| Operating Temperature | | -40°C to +40°C |
| Certifications Logos | | Wet Locations, IP66, UL, DLC 5.1 |

Note: Specifications are for 5000K



DIMENSIONS:

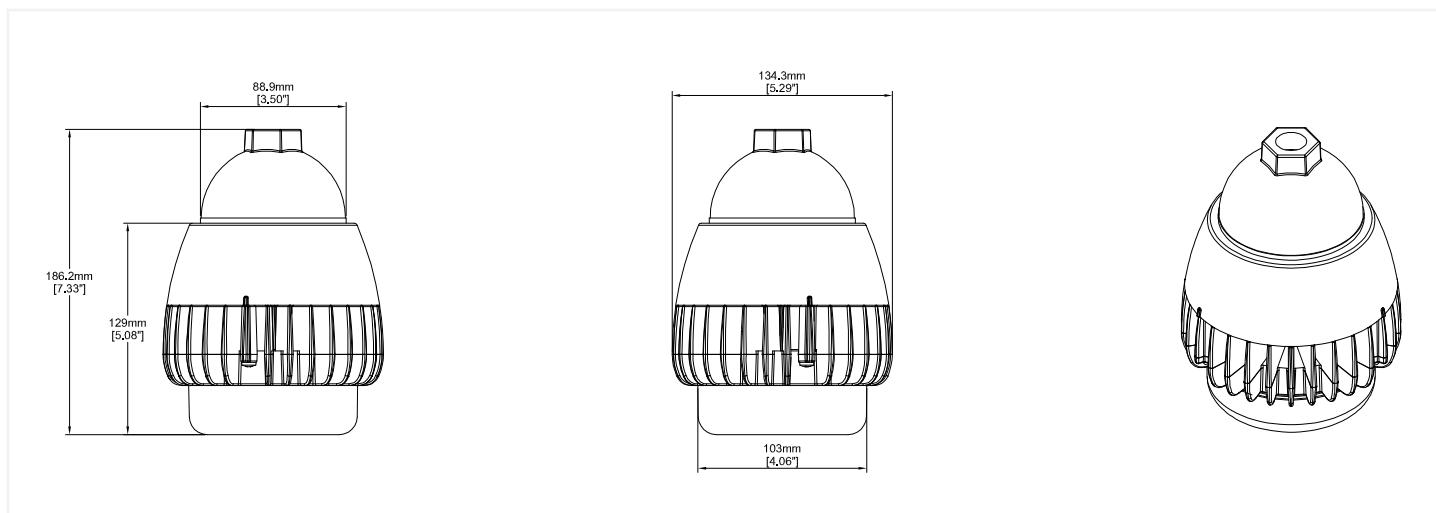

OTHER MOUNTING OPTIONS:



DVBKS2-LED
Wall mount



DVAKS2-LED
Ceiling mount

AVAILABLE OPTIONS:



ORDERING GUIDE:

| DVCS2 | LED26 | B | | NAT | DIM | FR | PM |
|---------|---------|--------------|---|------------------------|---------------------|-------------------|--------------------|
| Fixture | Wattage | Voltage | Color Temp. | Finish | Dimming | Lens | Mounting |
| | LED26 | B - 120-277V | 3K - 3000K 4K - 4000K 5K - 5000K* | NAT - Natural Aluminum | DIM - 0-10V Dimming | FR - Frosted Lens | PM - Pendant Mount |

*Standard Configuration

FIELD INSTALLED ACCESSORIES:

CHECK THE ACCESSORIES YOU WISH TO ORDER:



Cast Guard - Raw Finish GD100CGS



GL100
Clear Glass

GL100F
Frosted Glass



RGL100A
Amber



RGL100B
Blue



RGL100G
Green



RGL100R
Red