



PULLOUT DISCONNECT ACD

RAB's contractor friendly ACD Pullout disconnect ensures reliable, safe, and efficient control of electrical system, enabling quick power disconnection during maintenance or emergencies. Ideal for residential, commercial, and industrial use.



IDEAL APPLICATIONS


- ✓ HVAC
- ✓ Heat Pumps
- ✓ Sump Pumps
- ✓ Electrical appliances

SPECIFICATIONS

ELECTRICAL		
Voltage	120V, 240V AC	
Amperage	30A	60A
Switch Type	Pull Out	
Fuse Type	Fuse Ready	Non Fused
Surge Protector Ready	Yes (tabs attached)	

CONSTRUCTION	
Housing	Steel Housing
Paint Specs.	Weather and Corrosion resistant Polyester powder coat finish
Housing Finish	Light Grey
Cover	Opens upwards & locks
Lock Type	Pad lockable
Wire Size	#14-3
Terminals	Electro plated copper with Brass tabs for installing surge protector
Knockouts	Six - Accommodates 1/2", 3/4", and 1" conduits
Dimensions	8.77" x 5.45" x 3.18"
Weight	1.25 kgs (2.76 lbs)

DIMENSIONS

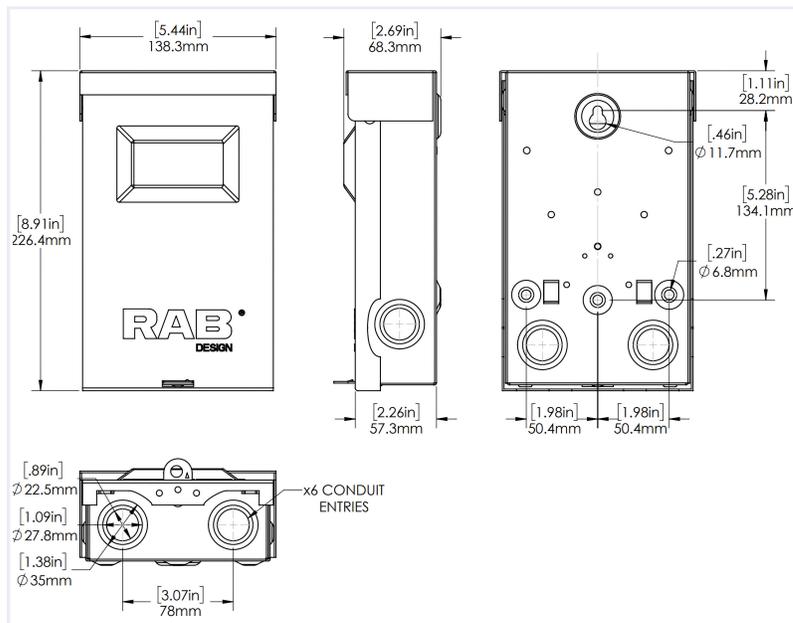

CERTIFICATIONS	
cUL Listed for Canada per CSA 22.2 No. 29, NEMA 3R	



ORDERING GUIDE

STOCK CODE	DESCRIPTION	
085085	ACD-60A-NF-3R	Non-Fused
085082	ACD-60A-NF-3R-SP	Non Fused & Surge Protector ready
085080	ACD-30A-F-3R-SP	Fuse & Surge Protector ready
085081	ACD-60A-F-3R-SP	Fuse & Surge Protector ready
085115	ACD-60A-NF-3R-SP W/SPD-50KA	Bundle Pack of 4pcs ACD & 4pcs SPD

ACCESSORIES SOLD SEPARATELY		
085079	SPD-50KA	
085083	ACD-WHIP-NM-6FT-1/2IN-10AWG	
085084	ACD-WHIP-NM-6FT-3/4IN-8AWG	