




Hazardous Incandescent

EB12



SHOWN WITH OPTIONAL CAST GUARD

DIMENSIONS

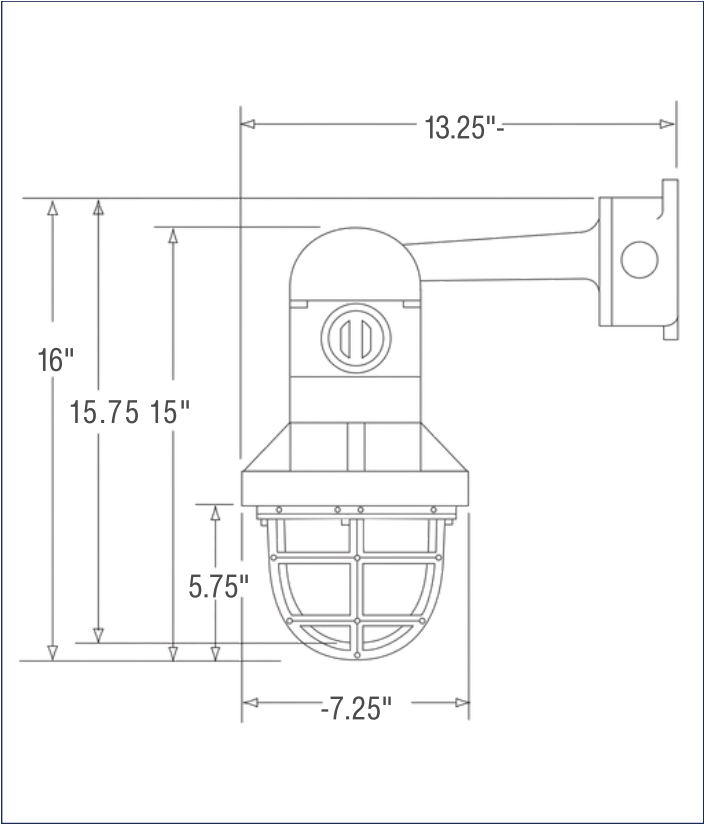

The EB12 is an incandescent fixture for hazardous locations. Suitable for use in chemical plants, refineries and other hazardous applications where vapours and dusts are present.

SPECIFICATIONS

	EB12
Housing	Die cast aluminum housing with a natural aluminum finish.
Wiring Compartment	Die cast aluminum with 5 entries available in 1/2" and 3/4" conduit entries. Each unit comes with 3 close out plugs.
Socket	Medium base glazed socket with nickle plated screw shell.
Globe	Heat and impact resistant clear prismatic glass globe.
Finish	Natural aluminum finish.
Accessories	Die cast aluminum guard, aluminum reflector, 30 degree aluminum reflector. Aluminum reflectors has a white reflective powder coat paint finish.
Mounting	Wall mounted
Approvals	CLASS I - Groups C & D, Divisions 1 & 2 (300 watt PS-25 max) CLASS II - Groups E, F & G, Divisions 1 & 2 (200 watt max) CLASS III - (150 watt max) Listed for use in paint spray areas (75 watt max)
Certifications	Complies with CSA for stated classes and groups. CSA Listed

CATALOGUE CODE

EB12

MODEL

1/2, 3/4

CONDUIT ENTRY SIZE

GD/EP4 - CAST GUARD*

ACCESSORIES

*ACCESSORIES ARE ORDERED AND SHIPPED SEPARATELY