




Smarter Design With Better Performance

RAB DESIGN SMWN-LED
Performance Series



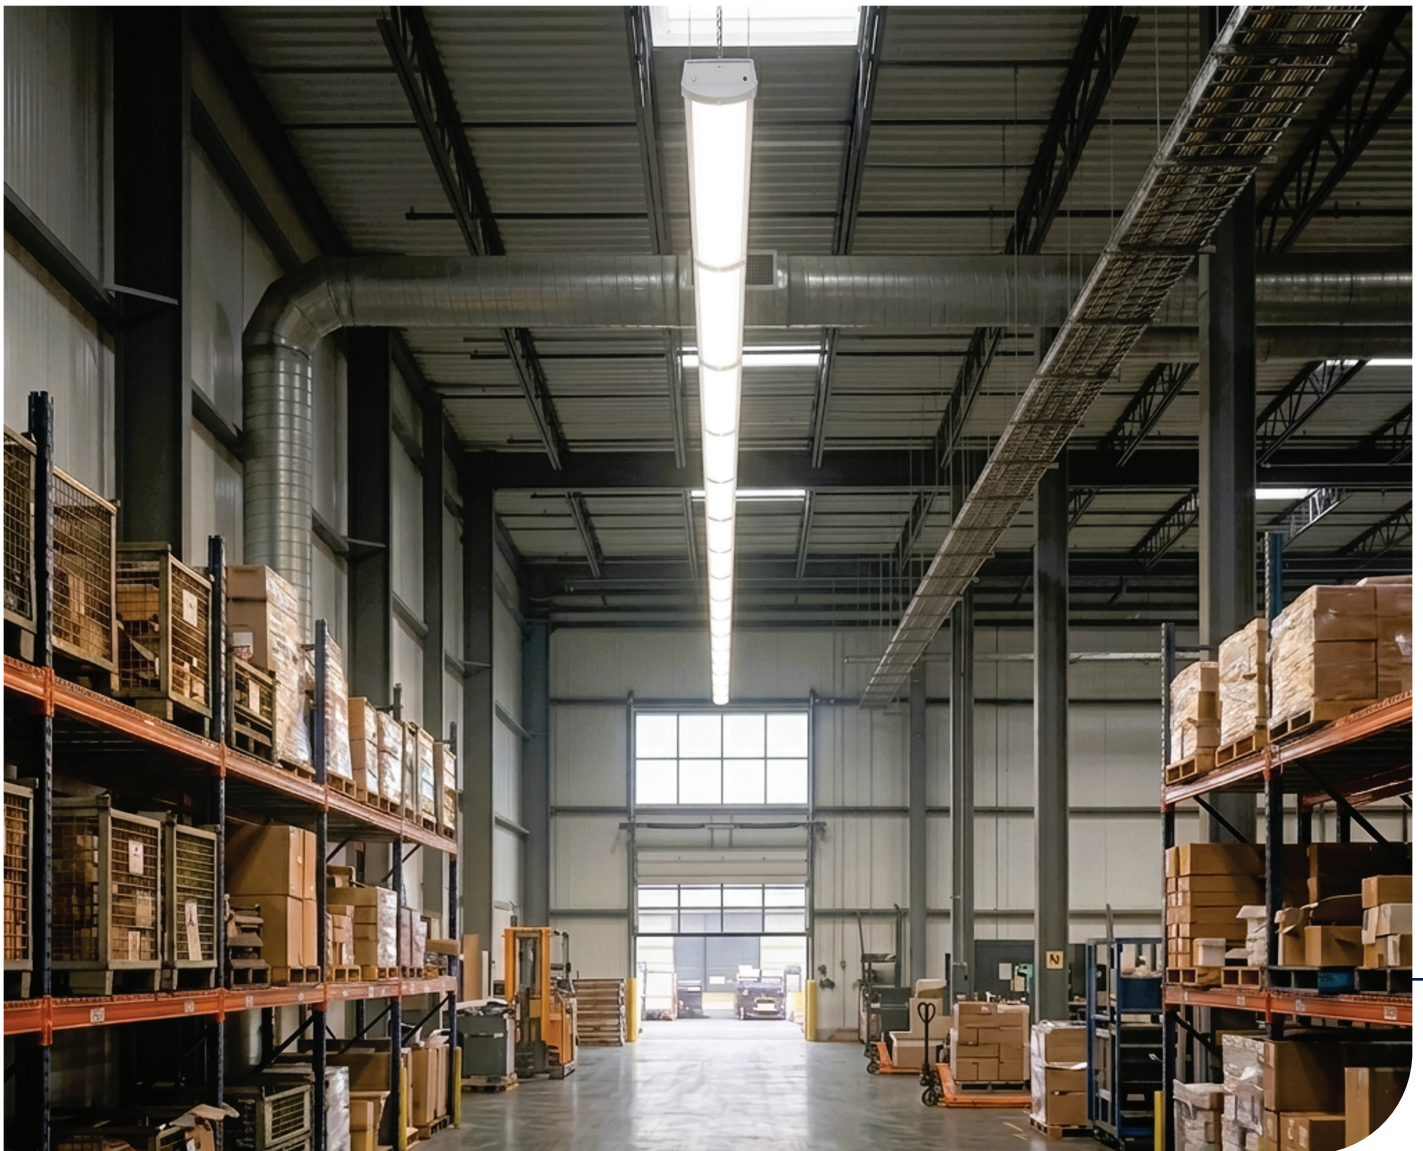

Surface Mount Wrap

RAB DESIGN SMWN-LED Performance Series

Add selectability, higher efficacy and DLC 6.0 Premium performance, and you get a wrap that delivers **more where it matters.**



IDEAL FOR: ✓ Stairwells ✓ Foyers ✓ Hallways ✓ Utility Areas



SMW4N - 4ft Version

SMW2N - 2ft Version




Simpler Wiring:
Wiring can be done inside or outside the fixture.

Expansive space for wiring and other accessories.

Hinge open design enabling hassle-free installation.


Knockouts on the end of fixture for wiring ease.

LED is conveniently attached and protected in a hinged compartment.

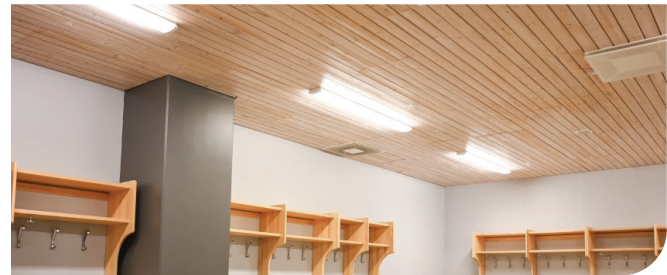

Simpler to Install.

- New hinged opening for fast, simple access to wiring.
- No need to remove the lens during install or maintenance.
- Expansive space for wiring and other accessories.

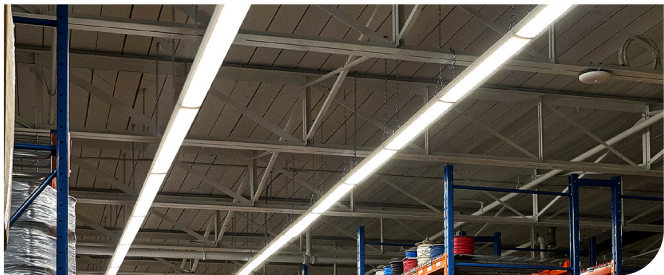

Better Performance.

- The latest RAB Wrap is **DLC 6.0 Premium** listed.
- Higher efficacy with lower wattage – dropped from 46W to 35W.
- All models are CCT selectable.
- Every model comes sensor-ready for Bluetooth® and stand-alone controls.



Better Savings.

- Energy savings through improved efficacy and a lower wattage.
- Lower operating costs through improved efficiencies for install and maintenance.
- DLC 6.0 Premium listed under the Linear Ambient and Lowbay Categories (rebates vary by province).

Specifications:

SMW2N-LED25 084937 - SMW2N-LED25-B-VK-WHT-DIM-SR-FR	
Lumens	3,400 lm
Efficacy	147 lm/W
Replaces Up To	2ft T8 Lamp
Wattage	25W
Voltage	120-277V
Beam Distribution	110°
Colour Temp.	Selectable - 3500K / 4000K / 5000K
Linkability	3-pin linkable

SMW4N-LED35 084935 - SMW4N-LED35-B-VK-WHT-DIM-SR-FR-NL	
Lumens	5,100 lm
Efficacy	153 lm/W
Replaces Up To	4ft 2 Lamp T8
Wattage	35W
Voltage	120-277V
Beam Distribution	110°
Colour Temp.	Selectable - 3500K / 4000K / 5000K

SMW4N-LED50A30 084936 - SMW4N-LED50A30-H-VK-WHT-DIM-SR-FR	
Lumens	7,300/5,800/4,400 lm
Efficacy	153 lm/W
Replaces Up To	4ft 3 Lamp T8
Wattage	50/40/30W
Voltage	120-347V
Beam Distribution	110°
Colour Temp.	Selectable - 3500K / 4000K / 5000K
Linkability	3-pin linkable




Compatible With:

CONTROLLED

ControlLED Network Lighting Controls (NLC) deliver secure, wireless lighting management with Bluetooth Mesh and the ControlLED App. Integrated sensors enable automatic adjustments for comfort, safety, and efficiency.



Easily configure and manage lighting settings from the Bluetooth® app, making setup and future adjustments quick and convenient.

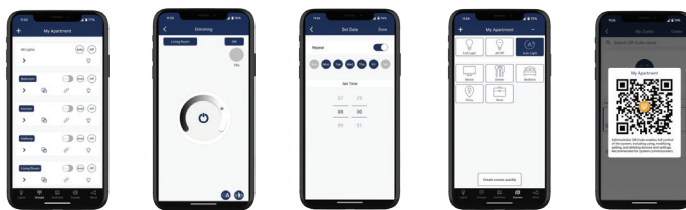

Get the Perfect SMWN For Your Install

To learn more or to place an order, call 1-800-268-0381, scan the QR code, or email us at salesupport@rabdesign.ca



Lighting Your Way.
Simple by Design.

© 2026 RAB DESIGN Lighting Inc.
All rights reserved