

CONTRAST R SIZE O FLOOD - BY THORN

The CONTRAST R is a high performance cylindro-parabolic floodlight with symmetrical distribution. Front glass and reflectors can be rotated to give alignment of the beam profile to suit the application. The CONTRAST R flood has a wide arrangement of attachments including louvres, protective grills, barn doors and colour lens. For use in sports, facade and landscape lighting. Available in 39, 50 and 70MH. For higher wattages refer to Size 1 and Size 2.

HOUSING Die cast aluminum with a polyester powder coat finish in grey.

LENS Clear tempered glass.

REFLECTOR

REFLECTOR #1 - glass with medium/wide symmetrical distribution

REFLECTOR #2 - with wide symmetrical distribution

REFLECTOR #3 - with narrow/wide symmetrical distribution.

BALLAST All ballasts are Tri-Tap 120,277,347 volts, or electronic.

WATTAGES Available in 39,50 or 70 watt Metal Halide.

LAMP All units come complete with lamp.



SOCKET Bi-pin base 4KV pulse-rated socket for G12 lamps or porcelain double ended socket spring loaded for E27 lamps.


INSTALLATION / MOUNTING Fixture is fully adjustable on a yoke.

OPTICS / REFRACTORS Prismatic glass available in extra wide, wide, medium and narrow distribution.

OPTIONS Louvre, Visor, Adjustable Louvre, Wire Guard, Sand Blasted Glass, Long Stirrup, Barn Door, Spill Shield and Colour Filters available in Red, Blue, Green and Yellow. All are ordered separately.

Catalog Code CONRO 39MH G12, 50MH G12, 70M G12. 39MH E27, 50MH E27, 70MH E27 LAMP R0 L1 - REFLECTOR NO1 R0 L2 - REFLECTOR NO2 R0 L3 - REFLECTOR NO3 REFLECTOR 120 277 347, 120-277E, 347E **VOLTAGE** RO GL S/S XEXT - PRISMATIC GLASS EXTRA WIDE, R0 GL A/S EXT - PRISMATIC GLASS WIDE, R0 GL A/S SIT - PRISMATIC GLASS MEDIUM, R0 GL/FR S/S SINT - PRISMATIC GLASS / REFRACTOR GLASS NARROW RO FILTER BLUE, RO FILTER GREEN, R0 FILTER RED, RO FILTER YELLOW **COLOUR FILTER OPTIONS** R0 LV - LOUVRE, R0 VS - VISOR, R0 LV/AJ - ADJUSTABLE LOUVRE, R0 LV/HC - HONEYCOMB LOUVRE, R0 WG - WIRE GUARD, ACCESSORIES RO FILTER/FR - SAND BLASTED FILTER

Mounting Detail

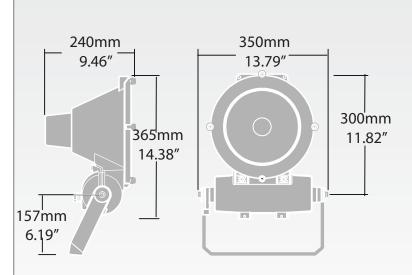

Dimensions

