



FHB4 - FLUORESCENT HIGHBAY T5 / T8

The FHB4 is a specification grade, fluorescent enclosed and gasketed. for use in indoor and outdoor applications where high-efficiency, high-performance and water and dust resistnace are required. Available in 4 foot lengths only. Available with T8 or T5 lamps in 4 or 6 lamp configuration. the fixture is IP67 rated. Standard unit has a high impact acrylic diffuser with optional polycarbonate lens. Ideal ofr use in cold storage, cleanrooms, car washes, food processing and dusty environments.

CONSTRUCTION Continuous poured in place polyurethadne gasket. Diffure flange fits into the gasketed rretention slot porividing a continuous seal and is held in place with retaining latches. Holes on each end are 7/8" nominal diameter and are p[rovided with two EPDM rubber caps.

MOUNTING Optional V sspeedy hangers accomodate chain (not provided).

FINISH Molded plastic one-piece plastic body. Pre-painted, cold-rolled steel geart-rays with a minimum 87% total reflectance.

OPTICS Optional vf-1 REFLECTORS ARE MADE OF SPECULAR LOW IRRIDES-CENCE, white straight blade baffle

SOCKETS Standard socket provides positive lamp retention, optional rotary lock sockets are available.

HARDWARE Stainless steel.

RATED IP65



BALLASTS T5 ballasts are rapid start available in 120/277 or 347 volts. T8 ballasts are available in rapid or instant start in 120/277 or 347 volt configuration.


OPTIONS Polycarbonate rotary lock sockets, dual hooks and mounting channels, bulk packed for large projects (wrapped on skids), VF-1 reflector 94% reflectance.

OPTIONS SHIPPED SEPARATELY

- Heavy duty wire guard painted white with mounting hardware.
- Emergency power pack.
- Motion sensor and assembly.
- Chain sets.
- Stem and canopy sets.
- Mounting bracket for single stem mounting.
- Flexible cord feed.
- Lamps included but not installed.



www.rabdesign.ca

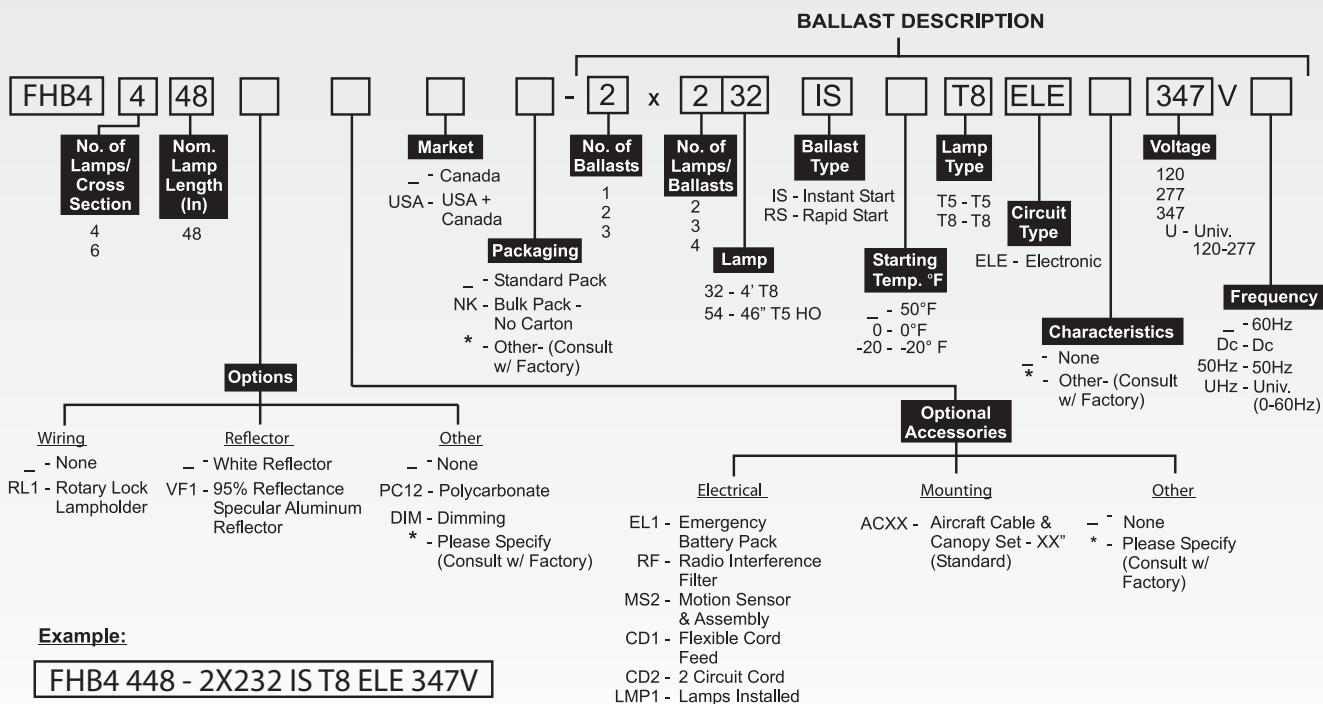

Dimensions

