



HALINE 1000W QUARTZ BY THORN

A compact quartz flood light with a unique feature being yoke mounted and bottom hinged. Ideal for construction sites, fishing vessels, advertising and security applications.

HOUSING Precision die-cast aluminum (LM6) housing. Housing has a powder coat paint finish.

REFLECTOR Aluminum, dimpled textured and anodized.

LENS FRAME Precision die-cast aluminum (LM6) with a rubber silicone gasket. Frame is bottom hinged for ease of maintenance. Frame is secured with a single slotted screw. Lens frame has a powder coat paint finish.

LENS Tempered clear glass, 5 mm thick.

LENS GASKET High temperature silicone gasket stays in place when relamping.

LAMP Lamp not included.

YOKE Galvanized steel with a powder coat paint finish.



SOCKET Porcelain RSC base socket with spring loaded centre contacts and strain relieved 250°C Teflon insulated leads.

MOUNTING Yoke mounted drilled with three holes : centre hole 9mm and two additional holes 9mm at 70mm centres.

FINISH Standard finish is a textured black.

RATING IP55

Catalog Code

FQ1000A

BLK

BLK - BLACK

FINISH


120

120


VOLTAGE

* Lamp included

Dimensions

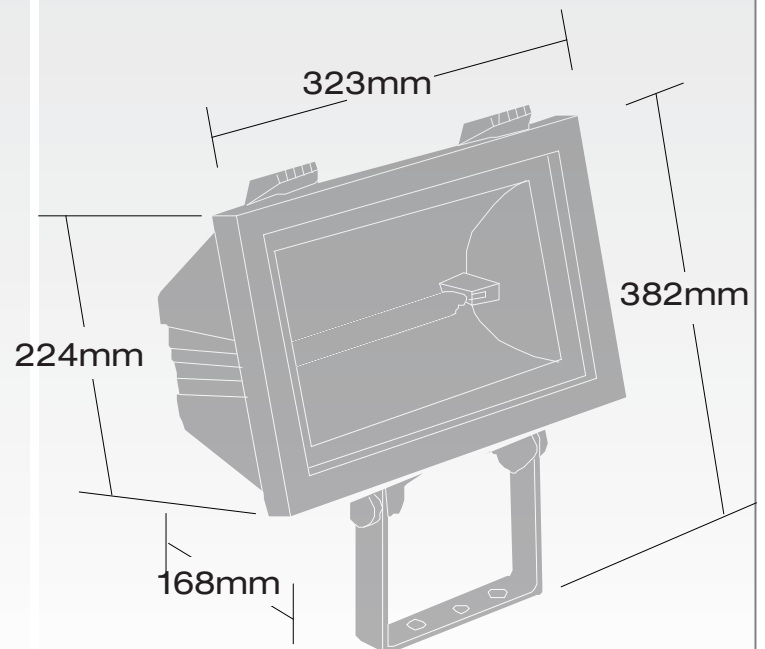

IED FLOOD REPORT
PHOTOMETRIC FILE HALINE 1000 P10A1E.IES
AXIAL CANDELA DISPLAY

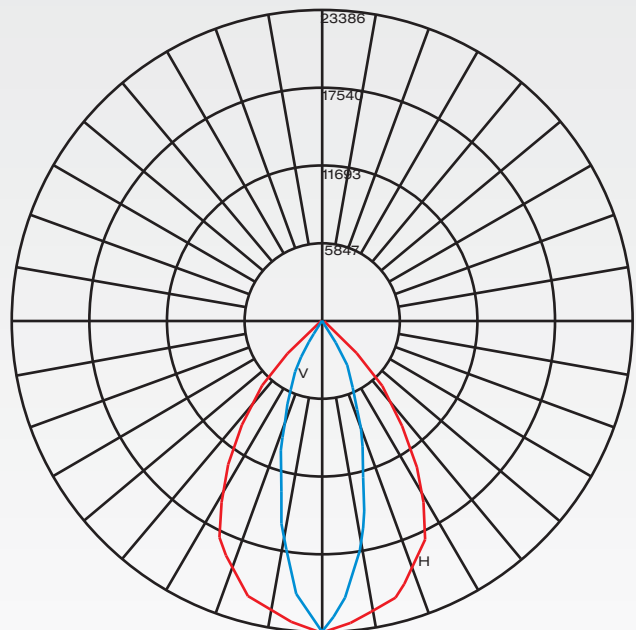

MAXIMUM CANDELA = 23386 LOCATED AT HORIZONTAL ANGLE = 0, VERTICAL ANGLE = 0
H - HORIZONTAL AXIAL CANDELA
V - VERTICAL AXIAL CANDELA