



## LARGE FLEX FLOOD WALL MOUNT

*The Flex Flood is a specification grade flood light with two lamp positions. With its clean lines and unique look, it is ideal for use on any building for use as an up or down light. Ideal for illuminating a sign, entrance way or architectural detail.*

**HOUSING** Precision die cast aluminum, with a wall mount bracket.

**REFLECTOR** Anodized aluminum. Field adjustable beam spread with two positions for the socket.

**LENS FRAME & GLARE SHIELD** Precision die cast aluminum. Hinged for easy access. Phillips head screws.

**BALLAST** Ballasts for High pressure sodium are Tri-Tap 120,277,347 for the following wattages 250 and 400. For Metal Halide, ballasts are Tri-Tap 120,277,347 for the following wattages. 175, 250 and 400 Metal Halide. Also in pulse start for the following wattages, 250, 320, 350 and 400.

**LAMP** All units come complete with lamp.

**LENS** Thermal tempered shock resistant glass, 3/16" thick.



**LENS GASKET** High temperature one piece molded silicone set in die cast retaining groove. Remains in place during relamping.

**SOCKET** Mogul base, 4KV pulse-rated socket with a nickel-plated screw shell and a spring-loaded centre contact.

**MOUNTING** Wall mounted, plate fits over a standard 4" box.

**FINISH** Chip and fade resistant bronze or white polyester powder coat.

**OPTIONS** The following are options available, photocell and a wire guard.

[www.rabdesign.ca](http://www.rabdesign.ca)

## Catalog Code

**FXLX**

LAMP

250HPS 400HPS  
175MH 250MH 400MH  
250MHP 320MHP 350MHP  
400MHP

VOLTAGE

120 277 347

COLOUR


BRZ - BRONZE  
WH - WHITE  
CC - CUSTOM COLOUR

OPTIONS

WG - WIRE GUARD  
PC - PHOTOCCELL

## Dimensions

**RAB**  
DESIGN

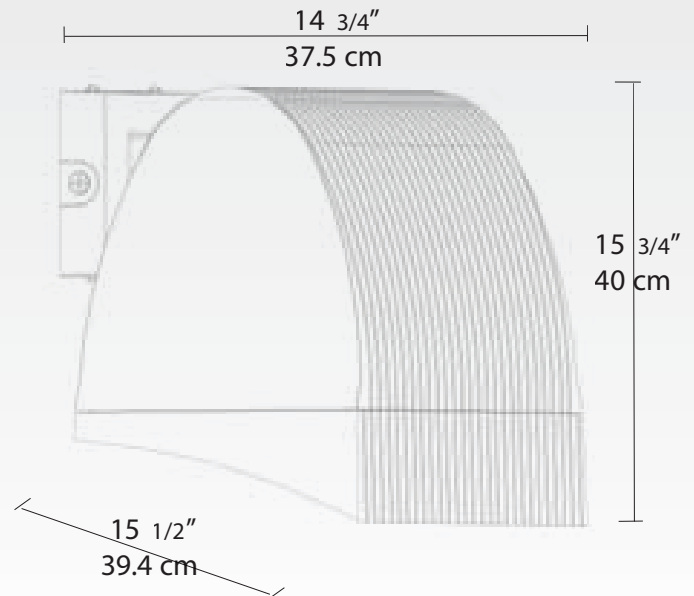

0411