



FLEX FLOOD SLIP FITTER

The Flex Flood is a specification grade flood light with two lamp positions. The reflector rotates for horizontal or vertical lamp positions and can be adjusted in the field. With its clean lines and unique look, it can be used in almost any application. Ideal for lighting exterior features such as landscapes, buildings and signs.

HOUSING Precision die cast aluminum, with a slip fitter mount for a 2 3/8" diameter tenon.

REFLECTOR Anodized aluminum. Field adjustable beam spread with two positions for the socket. Reflector and socket can be changed in the field from a vertical lamp position to a horizontal lamp position.

LENS FRAME & GLARE SHIELD Precision die cast aluminum. Hinged for easy access. Phillips head screws.

BALLAST Ballasts for High pressure sodium are available as 120 volts high power factor and Tri-Tap 120,277,347 for the following wattages 70,100 and 150. For Metal Halide, ballasts are available as a dedicated 120 volts or as a Tri-Tap 120,277,347 for the following wattages. 70, 100, 150 and 175 Metal Halide. Also available is the 42 watt triple tube compact fluorescent.

LENS Thermal tempered shock resistant glass, 3/16" thick.



LAMP All units come complete with lamp.

LENS GASKET High temperature one piece molded silicone set in die cast retaining groove. Remains in place during relamping.

SOCKET HID 4KV pulse-rated socket with a nickel-plated screw shell and a spring-loaded centre contact. CFL Plug in type GX24q-4 base.

MOUNTING Slip fits a 2 3/8" tenon.

FINISH Chip and fade resistant bronze or white polyester powder coat paint finish..

OPTIONS Photocell and a wire guard.

www.rabdesign.ca

Catalog Code

FXSF

70HPS 100HPS 150HPS
70MH 100MH 150MH 175MH
42CFL

LAMP

120HPF 120 277 347

VOLTAGE


BRZ - BRONZE
WH - WHITE
CC - CUSTOM COLOUR

COLOUR

WG - WIRE GUARD
PC - PHOTOCCELL

OPTIONS

Dimensions

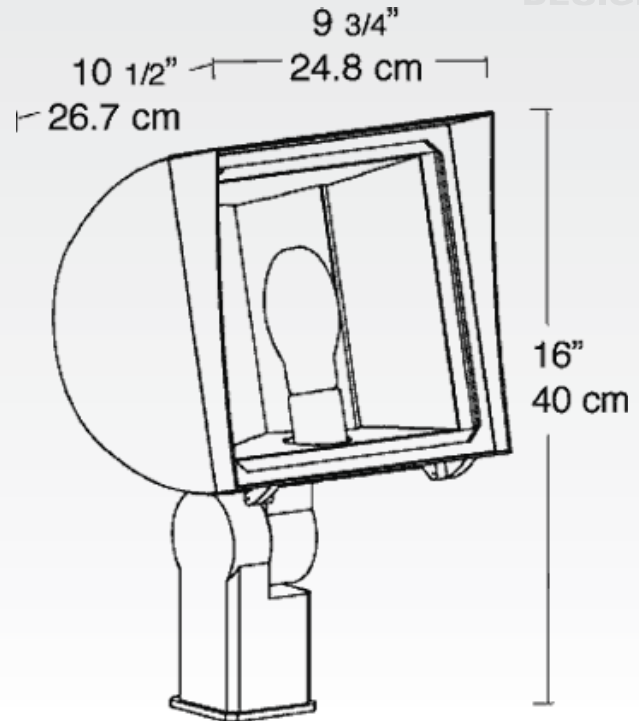

CATALOG NUMBER: FXT175MHW

FILENAME: FXT175MHW.IES

IESNA:LM-63-1995


[LUMINAIRE] FLEX FLOOD WIDE BEAM

[LUMCAT] FXT175MHW

[LAMP] 175W MH CLEAR

SUMMARY DATA

EFFICIENCY (Total):	72.3 %
LUMENS/LAMP:	14000
NO. OF LAMPS:	1
LUMINOUS OPENING:	RECTANGULAR
Width:	0.20 (Meters)
Length:	0.20
Height:	0.00
INPUT WATTS:	193

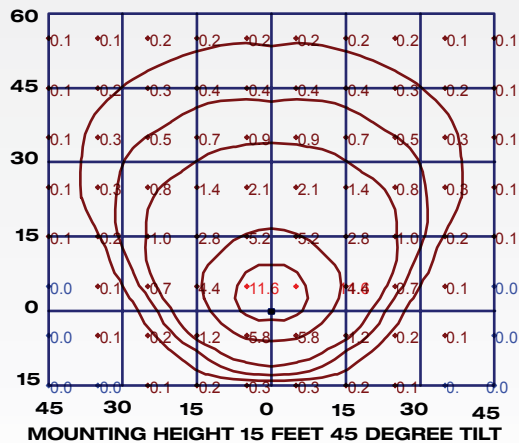

CATALOG NUMBER: FXT175MHN

FILENAME: FXT175MHN.IES

IESNA:LM-63-1995

[LUMINAIRE] FLEX FLOOD NARROW BEAM

[LUMCAT] FXT175MHN

[LAMP] 175W MH CLEAR

SUMMARY DATA

EFFICIENCY (Total):	72.0 %
LUMENS/LAMP:	14000
NO. OF LAMPS:	1
LUMINOUS OPENING:	RECTANGULAR
Width:	0.20 (Meters)
Length:	0.20
Height:	0.00
INPUT WATTS:	193

