



FLEX FLOOD WALL MOUNT

The Flex Flood is a specification grade flood light with two lamp positions. The reflector rotates for horizontal or vertical lamp positions and can be adjusted in the field. The unit can also be tilted up to 30 degrees for a greater beam spread. With its clean lines and unique look, it is ideal for use on any building for use as an up or down light. Ideal for illuminating a sign, entrance way or architectural detail.

HOUSING Precision die cast aluminum, with a wall mount bracket.

REFLECTOR Anodized aluminum. Field adjustable beam spread with two positions for the socket. Reflector and socket can be changed in the field from a vertical lamp position to a horizontal lamp position.

LENS FRAME & GLARE SHIELD

Precision die cast aluminum. Hinged for easy access. Phillips head screws.

BALLAST All ballasts are Tri-Tap 120,277,347. Available in 70,100 and 150 High Pressure Sodium and 70, 100, 150 and 175 Metal Halide. Also available is the 42 watt triple tube compact fluorescent.

LAMP All units come complete with lamp.

LENS Thermal tempered shock resistant glass, 3/16" thick.



LENS GASKET High temperature one piece molded silicone set in die cast retaining groove. Remains in place during relamping.

SOCKET HID 4KV pulse-rated socket with a nickel-plated screw shell and a spring-loaded centre contact. CFL Plug in type GX24q-4 base.

MOUNTING Wall mounted, plate fits over a standard 4" box.

FINISH Chip and fade resistant bronze or white polyester powder coat.

OPTIONS The following are options available, photocell and a wire guard.

Catalog Code

FXX

70HPS 100HPS 150HPS
70MH 100MH 150MH 175MH
42CFL

LAMP

120HPF 120 277 347

VOLTAGE

BRZ - BRONZE
WH - WHITE
CC - CUSTOM COLOUR


COLOUR

WG - WIRE GUARD
PC - PHOTOCCELL

OPTIONS

Dimensions

RAB
DESIGN

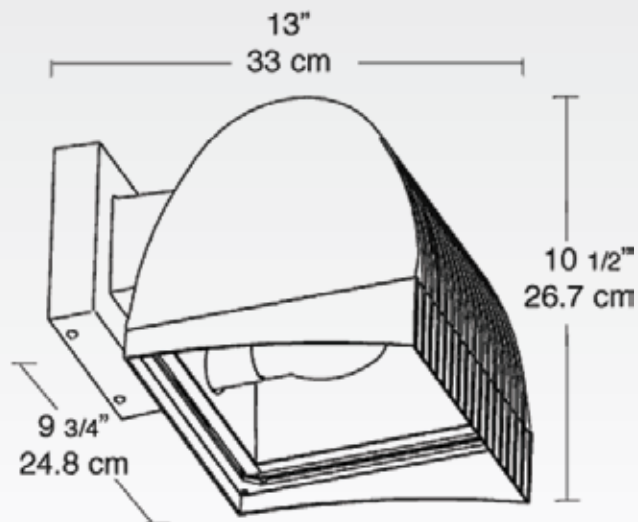

CATALOG NUMBER: FXT175MHW

FILENAME: FXT175MHW.IES

IESNA:LM-63-1995


[LUMINAIRE] FLEX FLOOD WIDE BEAM

[LUMCAT] FXT175MHW

[LAMP] 175W MH CLEAR

SUMMARY DATA

EFFICIENCY (Total):	72.3 %
LUMENS/LAMP:	14000
NO. OF LAMPS:	1
LUMINOUS OPENING:	RECTANGULAR
Width:	0.20 (Meters)
Length:	0.20
Height:	0.00
INPUT WATTS:	193

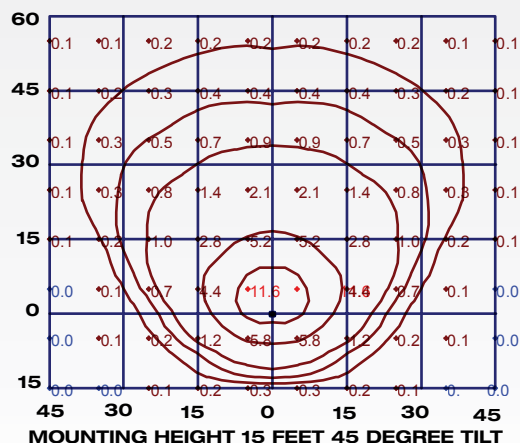

CATALOG NUMBER: FXT175MHN

FILENAME: FXT175MHN.IES

IESNA:LM-63-1995

[LUMINAIRE] FLEX FLOOD NARROW BEAM

[LUMCAT] FXT175MHN

[LAMP] 175W MH CLEAR

SUMMARY DATA

EFFICIENCY (Total):	72.0 %
LUMENS/LAMP:	14000
NO. OF LAMPS:	1
LUMINOUS OPENING:	RECTANGULAR
Width:	0.20 (Meters)
Length:	0.20
Height:	0.00
INPUT WATTS:	193

