



IG60751 T4 WALL WASHER 20 WATTS

The IG60751 T4 uses an 20 watt T4 Metal Halide. Stainless steel face plate has an optional orbital finish. The top lens is clear tempered glass 15mm thick with an option for an etched finish and a lower glass lens 3mm thick. The lamp sits in an adjustable assembly for aiming. The fixture is ideal for use in illuminating walls, landscapes and architectural detail.

HOUSING Extruded aluminum frame with a die cast aluminum base and electrical J-box.

POUR BOX Black polymer housing, with entry for electrical wiring.

LAMP ASSEMBLY The lamp sits in the horizontal position and is adjustable.

REFLECTOR Specular aluminum.

BALLAST Electronic 120 volts remote complete with ballast housing. Ballast assembly can be up to 50 feet away from the lamp.

LENS ASSEMBLY Lower level glass lens is 3mm thick and the upper lens is 15mm thick.

GLASS Tempered clear glass. Optional etched finish on the upper glass lens.



LAMP 20 watt T4. Lamp included.

FACE PLATE Stainless steel with a bevelled edge. Optional orbital finish is also available. The face plate is secured with 4 stainless steel screws with optional tamper proof screws.

IP67 / 1500kg & 30km/hr

Catalog Code

IG60751

20- 20WATT

WATTAGE

120

VOLTAGE

**S/S - STAINLESS STEEL
S/S-O - STAINLESS STEEL
WITH ORBITAL GRIND**

TRIM FINISH

E - ETCHED GLASS

OPTIONS

RAB
DESIGN

INSTALLATION INSTRUCTIONS

Dig hole to appropriate depth allowing for 6" minimum of pea gravel at bottom of rough-in section for drainage.

Note : More Pea gravel or additional drainage may be required in locations that have poor soil drainage and/or subject to freezing.


Install the rough-in section flush with the finish grade of earth or concrete only.

CAUTION : WHEN INSTALLING IN ORGANIC MULCH, SURROUND ROUGH-IN SECTION WITH APPROX. SIX INCHES (15cm) OF SAND OR OTHER NON-ORGANIC SUBSTANCE.

CAUTION : TEMPORARY COVER MUST REMAIN IN HOUSING DURING INSTALLATION.

Dimensions

IP67 / / 1500kg & 30km/hr

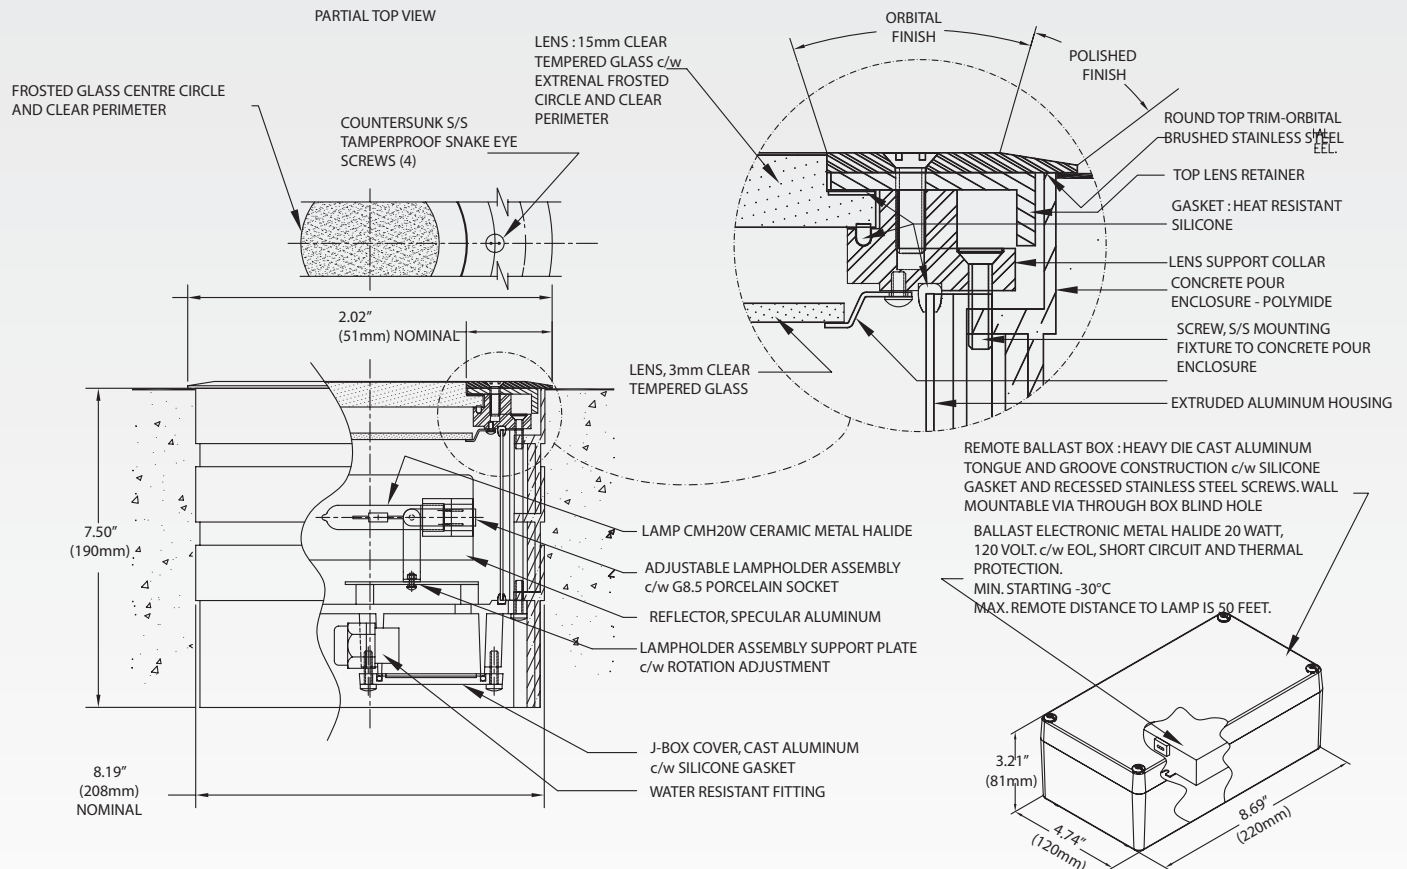

www.rabdesign.ca