



LFM16 LOW VOLTAGE MR16

The LFM16 uses MR16 lamps, with an integral glare shield and lens. Glare shield is fitted further down on the housing for ease of lamp replacement. Accepts up to 50 watts MR16 lamp. The LFM16 is ideal for use in both commercial and residential lighting for landscape and highlighting architectural features. The LFM16 can also be used with any of our outdoor sensors.

HOUSING Rugged die cast aluminum housing. The housing also has a set screw for holding the glare shield in place. Housing has a powder coat paint finish.

GLARE SHIELD Rugged die cast aluminum. Housing and glare shield have a silicone gasket. Glare shield has a powder coat paint finish.

LENS Clear tempered glass siliconed in place to prevent water from entering the fixture.

MOUNTING ARM Heavy duty mounting arm with internal O-ring, locking teeth, and stainless steel screw. EZ grip locknut matches fixture finish and can be adjusted with fingers, pliers or a screwdriver.

SOCKET GU5.3 bipin



LAMP Maximum wattage 50 watt MR16. Lamp not included.

FINISH Powder coat paint finish available in White, Charcoal, Bronze and Verde Green.

Catalog Code

LFM16


FINISH

A - BRONZE
B - BLACK
W - WHITE
VG - VERDE GREEN

RAB
DESIGN



Dimensions

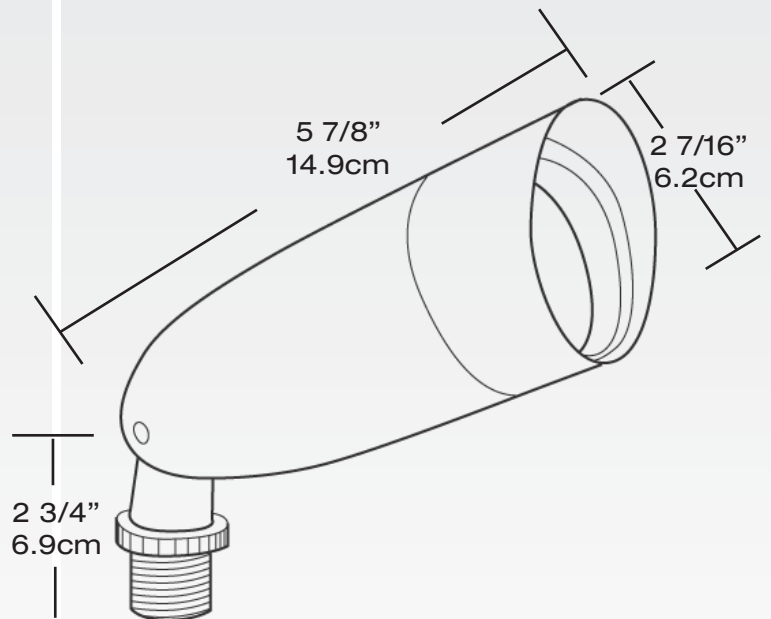

www.rabdesign.ca