



LOS2500 120 OCCUPANCY SENSOR

360 ° view super ceiling sensor with triple overlapping coverage for super sensitivity. Integral 30 amp power pack. No extra wires to run or extra boxes to install. Covers 2152 sf @ 9' height. LED detection indicator.

EASY INSTALLATION Relay and sensor all in one reduces installation cost. Compatible with dimmers and electronic ballasts. LED testing and operation indicator.

MAXIMUM RELIABILITY Adjustable detector sensitivity for superior detection.

MAXIMUM VERSATILITY Adjustable time delay. Sensor detection pattern can be customized. No minimum load requirement. Can be wired in parallel.

LISTING CUL US for indoor applications.

ADJUSTMENTS Photo time sensitivity

COVERAGE AREA 2152SF @9'

DETECTION 360° view super ceiling sensor.

FLUORESCENT WATTS SWITCHED
2000 watts

INCANDESCENT WATTS SWITCHED
2000 watts

MANUAL SWITCH None

POWER CONSUMPTION Negligible

RATINGS AMPS HORSEPOWER
20 amps 1 horsepower


TIME DELAY 10 seconds to 15 minutes

COLOUR White


WEIGHT 0.6lbs.



DETECTION PATTERN

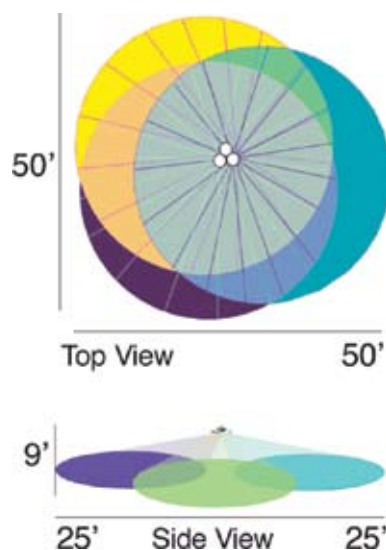

DIMENSIONS

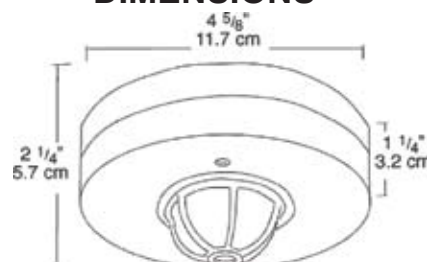

www.rabdesign.ca