



AWL-LED Series

Product feature presentation

RDALIGHTING.COM

AWL LED Wall Light Series



Perimeter lighting in commercial and residential buildings, townhouses, condominiums, schools, and warehouses.

3 Sizes, 5 Wattages



AWL-14
14 Watts

AWL-26
26 Watts

AWL-50
50 Watts

AWL-80
78 Watts

AWL-103
101 Watts

Superior Lighting Performance

Specs	<i>AWL-14</i>	<i>AWL-26</i>	<i>AWL-50</i>	<i>AWL-80</i>	<i>AWL-103</i>
Watts	14	26	50	78	101
Lumens	1,651	2,954	5,899	7,467	10,815
Efficacy (Lumens/Watt)	118	114	118	96	107
Replaces	150W MH	175W MH	200W MH	250W MH	400W MH

More than 70% ENERGY savings over traditional wallpacks.

Approx.
111
lumens/watt

Adjustable head

Fixture can be aimed 0-90° delivering more lumens on the ground when needed.



Adjustable head that can be aimed straight down for dark sky requirements or aimed out to deliver the light where required.

Versatile: Multiple conduit entries, colour temperatures, voltages, accessories

Specs	AWL-14	AWL-26	AWL-50	AWL-80	AWL-103
Conduit Entries	4	4	6	6	6
Photocell	included		option		
Voltage	120V (std), 277V, 347V (option)		120 – 277V (std), 277V, 347V (option)		
Finish	BRZ (std), BLK, WHT (option)		BRZ (std), other colours optional		
Working temp	-40° C to +40° C				
Colour Temp	5000K (std), 4000K, 3000K (option)				
CRI	>70				
Certifications	cULus, DLC, IP65				
Mounting Options	Wall/ Ceiling				
Accessories	Visor, PC Lens, Wire Guard, Dimmable Smart Sensor / On/Off Sensor				

Hanging hook / hinge feature allows use of both hands

Back box first mounts to the wall, then fixture is attached using a hanging hook or hinge assembly. These assemblies allow the installer the use of both hands while wiring and making connections.



Hook Assembly
AWL - 14/26



Hinge Assembly
AWL - 50/80/103

Installs in under 10 minutes

Built-in Leveling Bubble



Built-in leveling bubble
on fixture base facilitates
mounting alignment.

MS180DIM: Dimmable Smart Sensor – Use with 0 -10V dimmable driver



Dimmable for additional energy savings when used with optional smart sensor or on/off sensor.

**Dimmable Smart
Sensor**

261201

Optional Accessories




Polycarbonate Lens

Visor

Wire Guard

Optional accessories including visor, polycarbonate lens, and wire guard provide additional protection to the fixture.

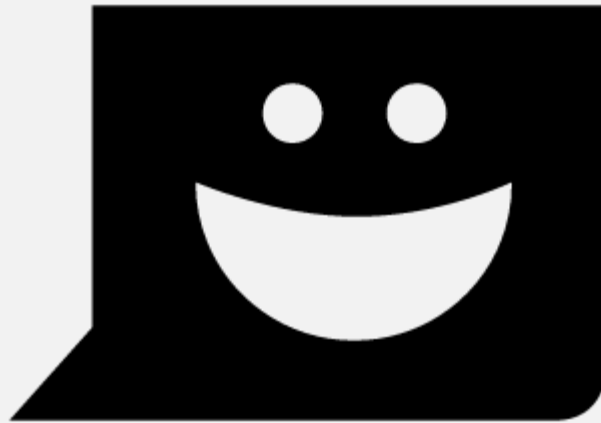

Thank you!