




FW4-LED50W

LED

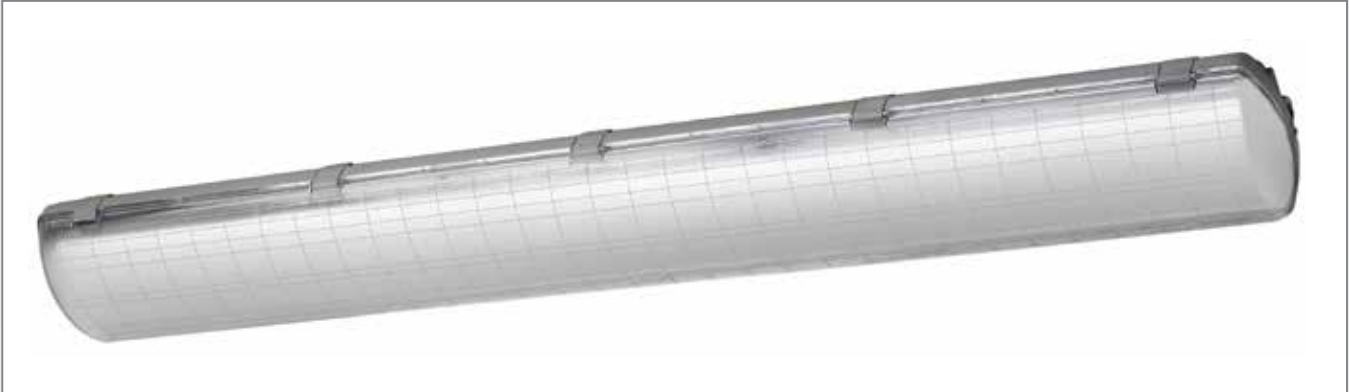

The FW4-LED50W is the next generation of our standard FW-T8 fluorescent series. The FW4-LED50W uses the same housing and tool-less entry clips. The FW4-LED50W can be used as a direct replacement. The 50W LED option replaces two 2T8 lamps. The LEDs are available as 4100k as standard. For 3000k and 5000k please consult factory.

HOUSING Polycarbonate, UV stabilized. Conduit entries at either end.

LENS Polycarbonate, UV stabilized, and is retained to the housing with ten clips.

REFLECTOR Flat aluminum reflector system with a white powder coat paint finish. LED boards are secured to the reflector using a clip and lock system.

ELECTRICAL Each unit has two high efficiency LED boards, high efficiency drivers operated 100V - 277V, 50-60HZ (47.24 watts). 0 - 10V dimming capability is standard. L70 up to 100,000 hours.

MOUNTING Standard unit comes with surface mount configuration.

VOLTAGE 3-wire, solid type 18awg, pre-stripped leads for quick in-field connection and hot load disconnect feature.

NOT FOR USE IN CAR-WASH FACILITIES.

LUMENS 4931

DIMMING 0-10V dimming capability is standard.

OPTION Stainless steel clips

OPERATING TEMPERATURE -40°C TO 40°C

POWER FACTOR .997

RATING IP65

WARRANTY 5 year warranty.

MEETS LM-79, LM-80

cUL Approved

www.rabdesign.ca

