



## FLEX FLOOD SWIVEL MOUNT

*The Flex Flood is a specification grade flood light with two lamp positions. The reflector rotates for horizontal or vertical lamp positions and can be adjusted in the field. With its clean lines and unique look, it can be used in almost any application. Ideal for lighting exterior features such as landscapes, buildings and signs.*

**HOUSING** Precision die cast aluminum, with 1/2" NPS locking swivel arm.

**REFLECTOR** Anodized aluminum. Field adjustable beam spread with two positions for the socket. Reflector and socket can be changed in the field from a vertical lamp position to a horizontal lamp position.

### LENS FRAME & GLARE SHIELD

Precision die cast aluminum. Hinged for easy access. Phillips head screws.

**BALLAST** All ballasts are Tri-Tap 120,277,347. Available in 70,100 and 150 High Pressure Sodium and 70, 100, 150 and 175 Metal Halide. Also available is the 42 watt triple tube compact fluorescent.

**LAMP** All units come complete with lamp.

**LENS** Thermal tempered shock resistant glass, 3/16" thick.



**LENS GASKET** High temperature one piece molded silicone set in die cast retaining groove. Remains in place during relamping.

**SOCKET** HID 4KV pulse-rated socket with a nickel-plated screw shell and a spring-loaded centre contact. CFL Plug in type GX24q-4 base.

**MOUNTING** 1/2" heavy duty swivel arm.

**FINISH** Chip and fade resistant bronze or white polyester powder coat.

**OPTIONS** Photocell and a wire guard.

## Catalog Code

FX

70HPS 100HPS 150HPS  
70MH 100MH 150MH 175MH  
42CFL

LAMP

120HPF 120 277 347

VOLTAGE

BRZ - BRONZE  
WH - WHITE  
CC - CUSTOM COLOUR


COLOUR

WG - WIRE GUARD  
PC - PHOTOCCELL

OPTIONS

## Dimensions

**RAB**  
DESIGN

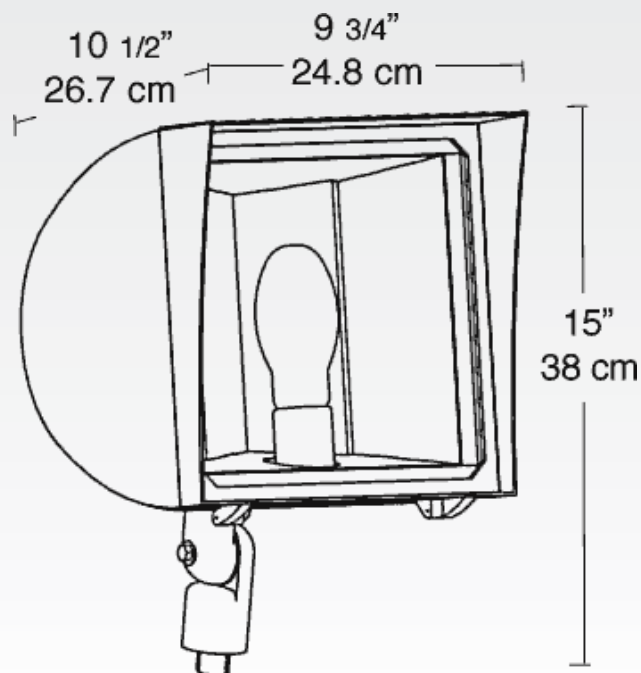

### CATALOG NUMBER: FXT175MHW

FILENAME: FXT175MHW.IES

IESNA:LM-63-1995


[LUMINAIRE] FLEX FLOOD WIDE BEAM

[LUMCAT] FXT175MHW

[LAMP] 175W MH CLEAR

### SUMMARY DATA

EFFICIENCY (Total):	72.3 %
LUMENS/LAMP:	14000
NO. OF LAMPS:	1
LUMINOUS OPENING:	RECTANGULAR
Width:	0.20 (Meters)
Length:	0.20
Height:	0.00
INPUT WATTS:	193

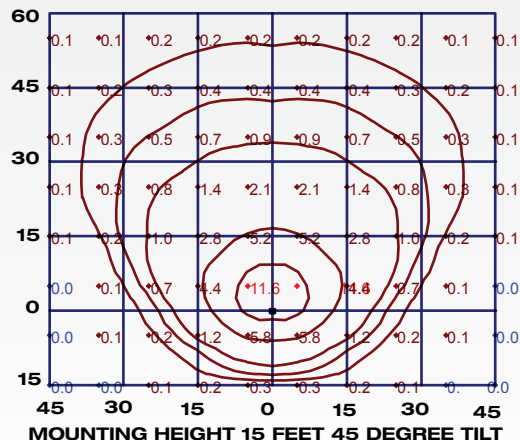

### CATALOG NUMBER: FXT175MHN

FILENAME: FXT175MHN.IES

IESNA:LM-63-1995


[LUMINAIRE] FLEX FLOOD NARROW BEAM

[LUMCAT] FXT175MHN

[LAMP] 175W MH CLEAR

### SUMMARY DATA

EFFICIENCY (Total):	72.0 %
LUMENS/LAMP:	14000
NO. OF LAMPS:	1
LUMINOUS OPENING:	RECTANGULAR
Width:	0.20 (Meters)
Length:	0.20
Height:	0.00
INPUT WATTS:	193

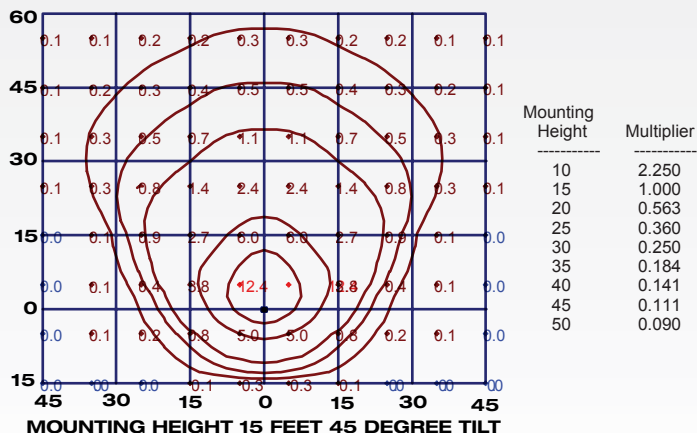

0411