



LARGE FLEX FLOOD SLIP FITTER

The Flex Flood is a specification grade flood light with two lamp positions. With its clean lines and unique look, it can be used in almost any application. Ideal for lighting exterior features such as landscapes, buildings and signs.

HOUSING Precision die cast aluminum, with a slip fitter mount for a 2 3/8" diameter tenon.

REFLECTOR Anodized aluminum. Field adjustable beam spread with two positions for the socket.

LENS FRAME & GLARE SHIELD Precision die cast aluminum. Hinged for easy access. Phillips head screws.

BALLAST Ballasts for High pressure sodium are Tri-Tap 120,277,347 for the following wattages 250 and 400. For Metal Halide, ballasts are Tri-Tap 120,277,347 for the following wattages. 175, 250 and 400 Metal Halide. Also in pulse start for the following wattages, 250, 320, 350 and 400.

LENS Thermal tempered shock resistant glass, 3/16" thick.



LAMP All units come complete with lamp.

LENS GASKET High temperature one piece molded silicone set in die cast retaining groove. Remains in place during relamping.

SOCKET Mogul base 4KV pulse-rated socket with a nickel-plated screw shell and a spring-loaded centre contact.

MOUNTING Slip fits a 2 3/8" tenon.

FINISH Chip and fade resistant bronze or white polyester powder coat paint finish..

OPTIONS Photocell and a wire guard.

www.rabdesign.ca

Catalog Code

FXLSF

250HPS 400HPS
175MH 250MH 400MH
250MHP 320MHP 350MHP
400MHP

LAMP

120 277 347

VOLTAGE

BRZ - BRONZE
WH - WHITE
CC - CUSTOM COLOUR


COLOUR

WG - WIRE GUARD
PC - PHOTOCELL

OPTIONS

Dimensions

RAB
DESIGN

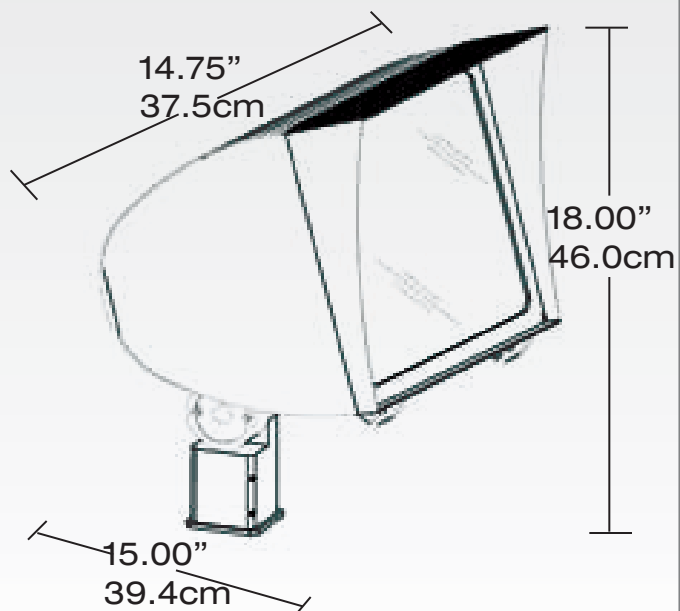

0411