



## APPLICATIONS

**The MS2HS has a detection range of 180° and is ideal for outdoor use on building perimeters and entrances.**

## MS2HS Twin Head LED Floodlight With Motion Sensor

The MS2HS is a fully adjustable twin head floodlight with a motion sensor that activates dual security lights when motion is detected and can be set up for convenient dusk to dawn operation.

<b>Project</b>	
<b>Type</b>	
<b>Date</b>	
<b>Notes</b>	

## SPECIFICATIONS

### Construction

Durable aluminum construction making it suitable for outdoor use. Fixtures are rectangular in shape and have a clear tempered glass lens. The unit is fully adjustable to direct light where needed.

### LED configuration

Each fixture head comprises one high efficiency LED Chip on Board. Complete fixture delivers a minimum of 2000 lumens. The LEDs have a colour temperature of 5000K.

### Electrical

Each fixture has a power consumption of 14W making it a total of 28W(14W X 2) .

### Mounting

Fixture can be wall or ceiling mounted and mounts directly on to standard junction boxes.

### Voltage

120V AC, 60 Hertz

### Power factor

0.9

### Detection method

Passive Infrared Sensor

### Detection range

32.8 feet X 180° at 8 feet mounting height

### Time adjustment

5 seconds to 7 minutes

### Daylight Adjustment

Fully adjustable for 24 hour operation or custom applications.



### Finish

Available in black or white

<b>LED Watts</b>	<b>28W (14W X 2)</b>
<b>Lumens</b>	<b>Min. 2000 lumens</b>
<b>Efficiency</b>	<b>71 lumens per watt</b>

<b>Operating Temperature</b>	<b>-40°C - +40°C</b>
<b>Certification</b>	<b>cCSAus</b>
<b>Warranty</b>	<b>5 Years</b>
<b>Colour Temperature</b>	<b>5000K (standard)</b>
<b>LED Life(L70)</b>	<b>50,000 hours</b>


## DIMENSIONS

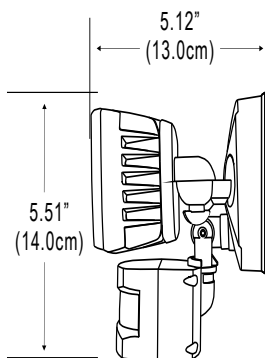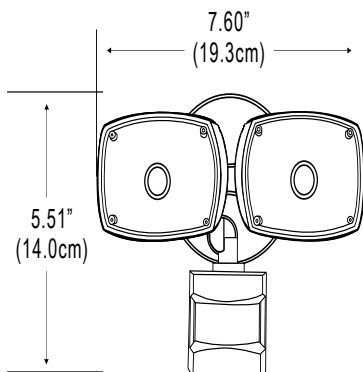


Shown in a White Finish



## SENSOR DETECTION RANGE

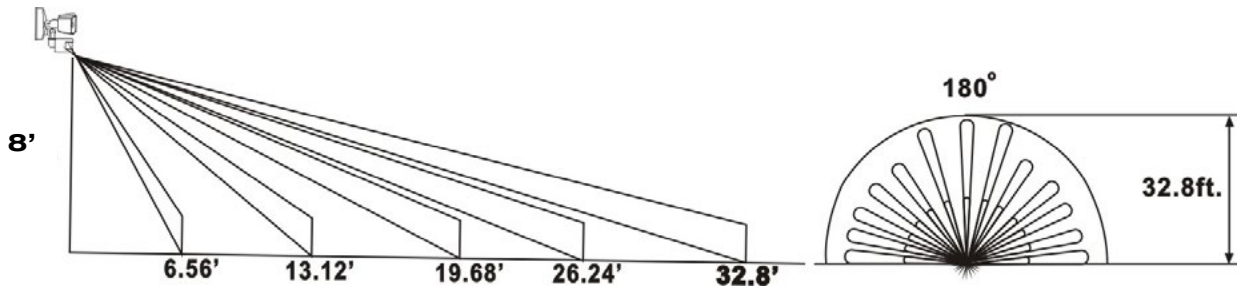

## CONTROLS

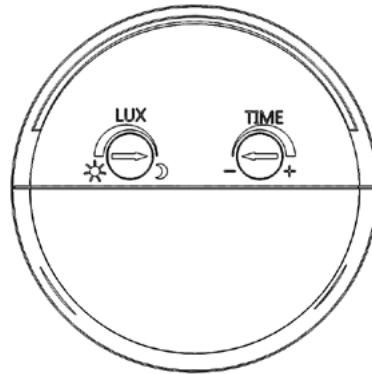

### Daylight Adjustment Dial (LUX)

Deactivates lights during daylight. Fully adjustable for 24 hour operation or custom applications. For normal dusk (night) operation set the dial about three-quarters of a turn towards the "moon" symbol.

### Time Dial (TIME)

Controls how long the light will remain on without activity. The range is from 5 seconds to 7 minutes. For maximum 7 minutes, set the dial at the "+" symbol.

## ORDERING GUIDE

<b>MS2HS</b>	-	<b>28</b>	-	<b>A</b>	-	<b>5K</b>	-		-	<b>180</b>
		<b>WATTAGE</b>			<b>VOLTAGE</b>			<b>COLOUR TEMP.</b>		
		<b>28W</b>			<b>A - 120V</b>			<b>5K - 5000K</b>		
								<b>FINISH</b>		
								<b>BLK - Black</b>		
								<b>WHT - White</b>		
								<b>RANGE</b>		
								<b>180 - 180°</b>		