



P2R WALL MOUNT

The P2R is an 8" wall mounted cylinder used for direct illumination on walls or columns. The P2R can be used in either outdoor or indoor applications. The reflector provides a 45 degree cut-off to the lamp. The fixture is ideal for commercial, retail, hospitality and institutional applications.

HOUSING Made of extruded aluminum with a .188 wall thickness and a durable polyester powder coat finish.

REFLECTOR Spun aluminum anodized.

SOCKET For Metal Halide, the socket is a porcelain 4KV pulse rated with an enclosed screw shell and a spring loaded centre contact. For compact fluorescent, the socket is a thermo plastic with integral clips for lamp retention. For incandescent lamps all sockets medium base 4KV pulse-rated.

BALLAST

HID All ballasts are core and coil Tri-Tap. Available in 50 to 150 watts High Pressure Sodium and 50 to 175 watts in Metal Halide. All ballasts are available in 120, 277 and 347 volts.

COMPACT FLUORESCENT All ballasts are electronic and available in 26, 32, and 42 watt. All ballasts are available in 120/277 and 347 volts.

MOUNTING BRACKET AND ARM The mounting plate is made of cast aluminum. The arm from the cylinder to the wall plate is made of extruded aluminum.



LAMPS All HID and fluorescent units are shipped complete with lamp.

HARDWARE All exterior hardware is made of stainless steel to ensure corrosion-free protection from the elements.

FINISH Polyester powder coat finish. Standard colours are black, white and bronze. For custom colours please consult factory

OPTIONS Tempered glass lens available as clear or frosted.



Catalog Code

P2R

INC - INCANDESCENT
26CFL, 32CFL, 42CFL 50HPS
70HPS 100HPS 150HPS
50MH 70MH 100MH 150MH
175MH

LAMP

120 277 347

VOLTAGE

BZ - BRONZE
WH - WHITE
BLK - BLACK
CC - CUSTOM COLOUR

FINISH


GLC - GLASS LENS CLEAR
GLF - GLASS LENS FROSTED

OPTIONS

**ALL METAL HALIDE LAMPS ARE OPEN
RATED (PROTECTED LAMP)**

Dimensions

RAB
DESIGN

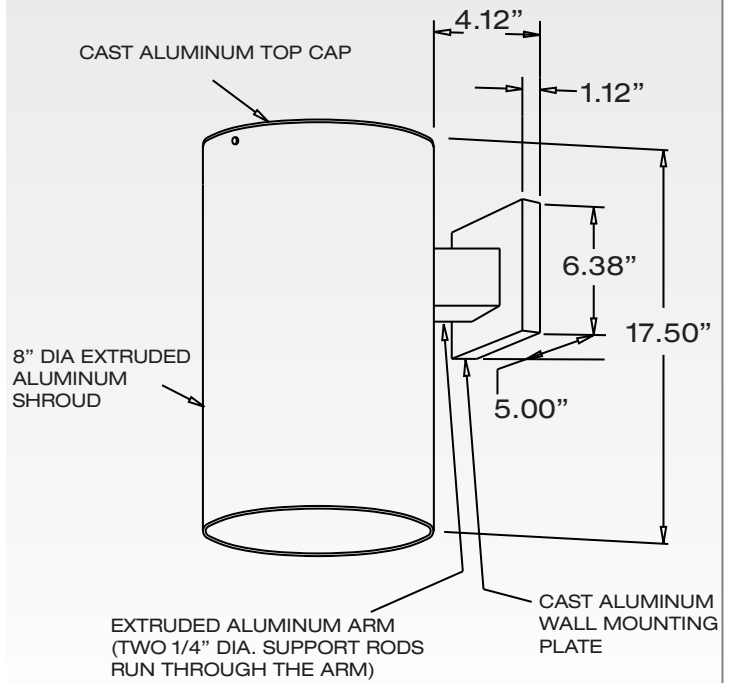

1208