



PLF39 39 WATT COMPACT FLUORESCENT

The PLF flood series are an economically priced as well as to operate. The housing and lens are made of corrosion proof and vandal resistant polycarbonate. The PLF is ideal for mounting on an exterior wall. The PLF39 uses three 13 watt twin tube lamps. The PLF39 can be wall or ground mounted.

HOUSING Corrosion proof and vandal resistant polycarbonate with a bronze finish.

LENS Clear ribbed, corrosion proof and vandal resistant polycarbonate.

REFLECTOR Anodized aluminum reflector.

GASKET High temperature tubular silicone gasket.

BALLAST 120 volts, normal power factor.

SOCKET 2 pin injection molded socket GX23.

MOUNTING Heavy duty cast aluminum mounting arm 1/2" threaded with swivel and stainless steel screw.

LAMP Complete with three 13 watt twin tube compact fluorescent lamp. -20°C minimum operating temperature.



ACCESSORIES The following can be ordered separately for the PLF39.

MP - Mighty Post for ground mounting available in 19" or 25" length.

Catalog Code

PLF39

BRONZE

FINISH

120 VOLTS


VOLTAGE

3 PL13 TWIN LAMPS INCLUDED

BALLAST IS 120 VOLTS NORMAL POWER FACTOR



Dimensions

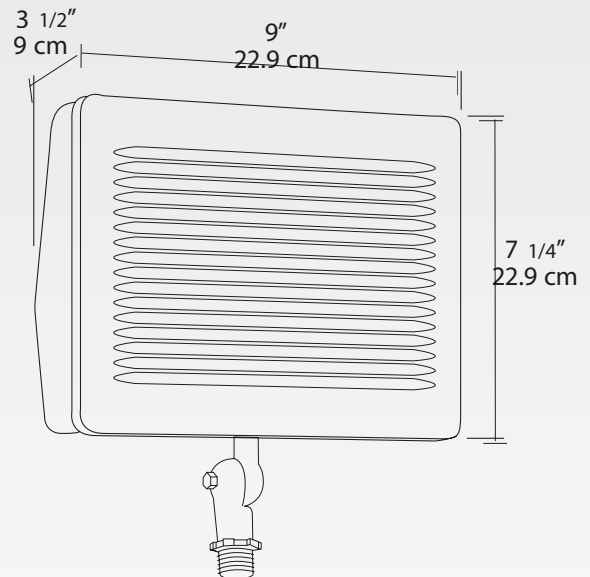

12/10

www.rabdesign.ca