



APPLICATIONS

Ideal for retail buildings, schools, townhouse complexes and apartment buildings

The WSDS-LED is a decorative, energy efficient down light in a square cylindrical shape that can be used in a variety of commercial and residential applications.

Project	
Type	
Date	
Notes	

SPECIFICATIONS

Construction

The WSDS-LED is a decorative fixture with a die cast aluminum housing and a clear tempered glass lens held in place with a gasket, lens frame and three stainless steel screws.

Mounting

The fixture can be wall mounted to standard junction boxes.

LED Configuration

The fixture delivers a total lumen output of 1035 lumens at an efficacy of 86 lumens/watt. The LEDs have a color temperature of 5000K.

Electrical

Total system wattage of the unit is 12W. The standard unit has a high efficiency driver that operates at 120-277V.


Finish

Bronze powder coat paint finish.

Equivalent to	50W
Watts	12W
Lumens	1035
Efficiency	86 lumens/watt

LED Life	100,000 hours
Color Temperature	5000K
Warranty	5 Years
Operating Temperature	-40° C to +40° C
Certification	cULus

DIMENSIONS

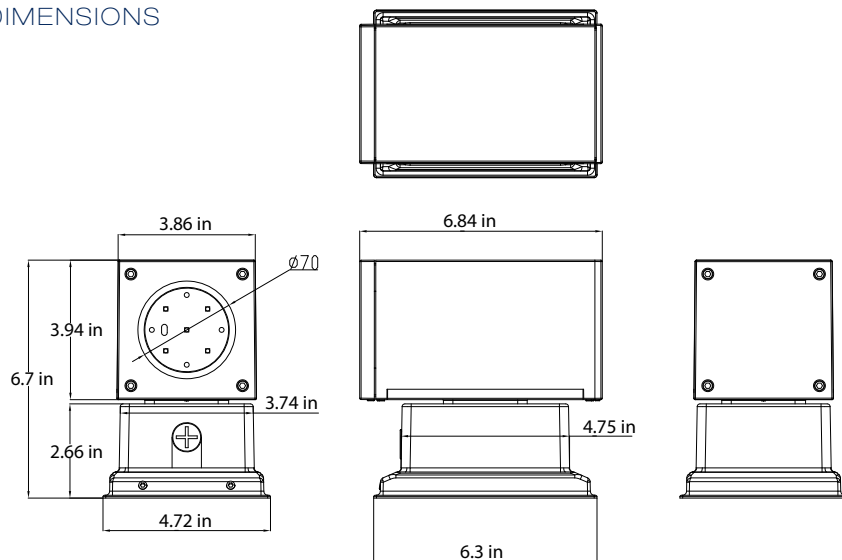

ORDERING GUIDE

WSDS	-	LED	-		-	
-------------	---	------------	---	--	---	--

VOLTAGE

COLOR TEMP

FINISH

B - 120 - 277V*

5K - 5000K*

BRZ - BRONZE*

* Standard configuration