

The DVAKS100CG is a versatile vaporproof fixture for ceiling mounting with a natural aluminum finish. The DVAKS100CG is made of die cast aluminum.



### APPLICATIONS

**Ideal for industrial and commercial applications.**

Project	
Type	
Date	
Notes	

### SPECIFICATIONS

#### Box

Precision die cast aluminum with four 1/2" NPT plugs installed and one open 1/2" threaded conduit opening on the top. One brass ground screw installed.

#### Gasket

Silicone gasket between the wiring box and the fitter.

#### Fitter

Threaded Precision die cast aluminum with a silicone gasket.

#### Globe

Clear glass threaded. Replacement glass part is GL100.

#### Socket

Porcelain, medium base, 4KV pulse rated socket with a nickel-plated screw shell and a spring-loaded center contact.

#### Guard


Threaded die cast aluminum with a set screw for locking the guard in place.

#### Hardware

All brass hardware.

Max Wattage	<b>100 watts</b>
Approval	<b>cULus for wet locations</b>
Lamp	<b>Not included</b>
Finish	<b>Natural aluminum</b>

### DIMENSIONAL DATA

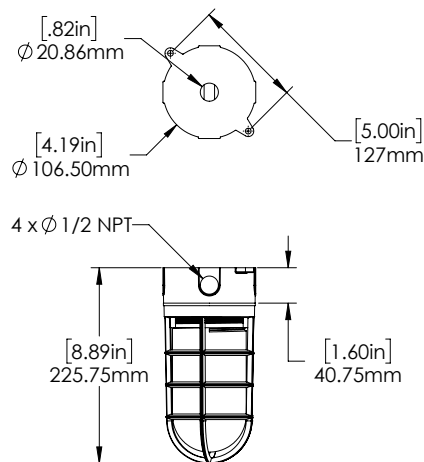

**DVAKS100CG**  
Ceiling mount



## OTHER MOUNTING OPTIONS



**DVBKS100CG**  
Wall mount



**DVCS100CG**  
Pendant mount

## AVAILABLE OPTIONS (SOLD SEPARATELY)



The **DVAKS100CG** is also available as an LED fixture.

## ORDERING GUIDE - FIXTURE

**DVAKS100CG**

## ORDERING GUIDE - ACCESSORIES (SOLD SEPARATELY)

**GLOOPR PRISMATIC GLASS**

**GL100F FROSTED GLASS**

**GL100 CLEAR GLASS**

**RGL100A (AMBER)**

**RGL100B (BLUE)**

**RGL100G (GREEN)**

**RGL100R (RED)**

**GL100PGO (POLYCARBONATE WHITE)**

**GD100CGS - GUARD**

\* Standard configuration