



The DVCS is an energy efficient LED vaporproof fixture that can be used for industrial and architectural applications. This series of fixtures comprises the DVAKS-LED which can be ceiling mounted, the DVBKS-LED which can be wall mounted and the DVCS-LED which can be pendant mounted.

APPLICATIONS

Ideal for industrial and architectural applications such as entrances, stairwells, mandors, outdoor walkways, tunnels and service areas.

| | |
|----------------|--|
| Project | |
| Type | |
| Date | |
| Notes | |

SPECIFICATIONS

Construction

Precision die cast aluminum housing with natural aluminum finish. Highly efficient heat sink design maintains the junction temperature significantly below the recommended maximum ratings ensuring extended fixture life. Frosted lens is standard. The fixture is rated IP65 and suitable for outdoor use.

Electrical

Total system wattage of the unit is 14W. The standard unit has a high efficiency driver that operates at 120 - 277V.

LED Configuration

The DVBKS-LED has an LED array that has a lumen output of minimum 1,400 lumens. The LEDs have a standard color temperature of 5000K. 3000K or 4000K available as options. The LEDs have a CRI of greater than 77 and an operating temperature range of -40°C to +40°C.

Finish


Standard finish is Natural aluminum.

Accessories

Various Globe and Guard Accessories sold separately. Existing incandescent VAKS / DVAKS series globe and guard will fit new LED fixture.

| | |
|------------------------------|---|
| Watts | 14W |
| Lumens | min. 1,400 |
| Efficacy | min. 100 lumens/watt |
| Certification | cULus, IP65 |
| LED Life | 100,000 hours |
| Color Temperature | 5000K (standard) 4000K (option) 3000K (option) |
| Warranty | 5 Years |
| Operating temperature | -40°C to +40°C |

DIMENSIONAL DATA

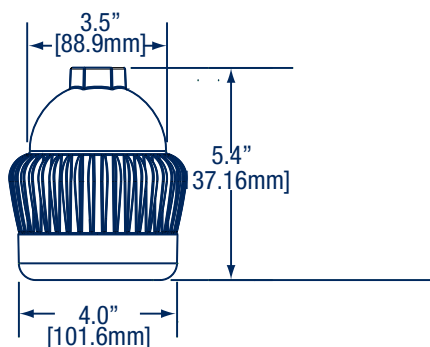

DVCS-LED
Pendant mount



OTHER MOUNTING OPTIONS



DVBS-LED
Wall mount



DVKS-LED
Wall mount

AVAILABLE OPTIONS (SOLD SEPARATELY)



ORDERING GUIDE - FIXTURE

| | | | | | | | | | |
|------|---|-------|---|-----------------|---|--|---|----------------------------|--------------------|
| DVCS | - | LED14 | - | B | - | | - | | |
| | | | | VOLTAGE | | | COLOR TEMP | FINISH | LENS |
| | | | | B - 120 - 277V* | | | 5K - 5000K* 4K - 4000K 3K - 3000K | NAT - NATURAL ALUMINUM* | FR - FROSTED LENS* |

ORDERING GUIDE - ACCESSORIES

ORDERING GUIDE - ACCESSORIES (SOLD SEPARATELY)



GLOOPR PRISMATIC GLASS

GL100F FROSTED GLASS

GL100 CLEAR GLASS

RGL100A (AMBER)

RGL100B (BLUE)

RGL100G (GREEN)

RGL100R (RED)

GL100PGO (POLYCARBONATE WHITE)

GD100CGS - GUARD

* Standard configuration