



The DWL1-LED18 is a sleek LED wall light with a slim profile and a rounded frosted lens that provides optimal light distribution.

### APPLICATIONS

**Ideal for lighting entrances, narrow aisles, walkways, and facades in a variety of residential, commercial and industrial applications.**

<b>Project</b>	
<b>Type</b>	
<b>Date</b>	
<b>Notes</b>	

### SPECIFICATIONS

#### Construction

The DWL1-LED18 is made from durable polycarbonate housing. It has a frosted lens and a reflector to limit light losses. The unit has an elegant looking curved contour with a slim profile of 3.1" from the wall. Unit has a cast aluminum back plate for optimal heat sinking.

#### Mounting

The DWL1-LED18 has two conduit entries, one on the bottom and one at the back and mounts directly onto the wall.

#### Finish

Bronze.

#### LED Configuration

Each fixture contains one high efficiency Chip on Board (COB) that delivers a total lumen output of 2,135 lumens at an efficacy of 107 lumens/watt. This serves as an ideal replacement for a 70W HPS fixture.

#### Electrical

Total system wattage of the unit is 20W. The standard unit has a high efficiency driver that operates at 120 V.



#### Photocell

Included.

<b>Fixture Watts</b>	<b>20W</b>
<b>Lumens</b>	<b>2,135</b>
<b>Efficacy</b>	<b>107 lumens/watt</b>

<b>Rated Life</b>	<b>100,000 hours</b>
<b>Certification</b>	<b>cULus, DLC</b>
<b>Color Temperature</b>	<b>5000K (standard)</b>
<b>Warranty</b>	<b>5 Years</b>
<b>Ideal Mounting Height</b>	<b>8' - 12'</b>
<b>Operating temperature</b>	<b>-40°C to +40°C</b>

### DIMENSIONS

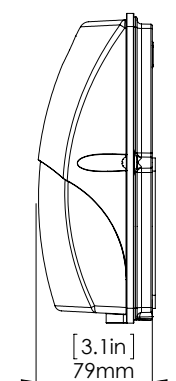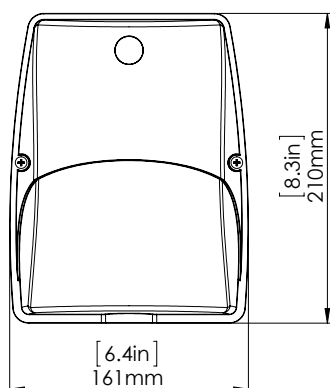

## ORDERING GUIDE

DWL1	-	LED18	-	A	-	5K	-	BRZ	-	PC	
				VOLTAGE			COLOR TEMP			FINISH	PHOTOCELL
				A - 120 *			5K - 5000K*			BRZ- BRONZE*	PC - PHOTOCELL*

\* Standard configuration