

The DWL2-LED30 is a sleek LED wall light with a slim profile and a rounded frosted lens that provides optimal light distribution.



### APPLICATIONS

**Ideal for lighting entrances, narrow aisles, walkways, facades in a variety of residential, commercial and industrial applications.**

Project	
Type	
Date	
Notes	

### SPECIFICATIONS

#### Construction

The DWL2-LED30 is made from durable polycarbonate housing, has a frosted lens and a reflector to limit light losses. The fixture has an elegant looking curved contour with a slim profile of 4.4" from the wall. Unit has a cast aluminum back plate for optimal heat sinking,

#### Mounting

The DWL2-LED30 has two conduit entries, one on the bottom and one at the back and mounts directly onto the wall.

#### Finish

Bronze.

#### LED Configuration

Each fixture contains one high efficiency Chip on Board (COB) that delivers a total lumen output of 2,801 lumens at an efficacy of minimum 93 lumens/watt. This serves as an ideal replacement for a 100W MH fixture.

#### Electrical

Total system wattage of the unit is 30W. The standard unit has a high efficiency driver that operates at 120V.


#### Photocell

Included.

Fixture Watts	30W
Lumens	2,801
Efficacy	93 lumens/watt

Rated Life	100,000 hours
Certification	cULus
Color Temperature	5000K (standard)
Warranty	5 Years
Ideal Mounting Height	8' - 12'
Operating temperature	-40°C to +40°C

### DIMENSIONS

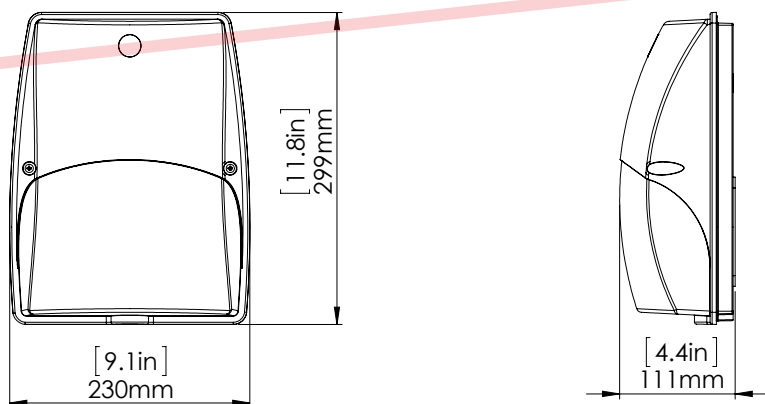

## ORDERING GUIDE

DWL2	-	LED30	-	A	-	5K	-	BRZ	-	PC	
				VOLTAGE			COLOR TEMP			FINISH	PHOTOCELL
				A - 120 *			5K - 5000K*			BRZ- BRONZE*	PC - PHOTOCELL*

\* Standard configuration