



FW4-LED41

4' LED Linear Vaporproof fixture

SPECIFICATIONS*

Watts	42.54
Lumens	5682.9
Efficacy	133.59 lm/W
Replaces Up To	2 Lamp T8
Color Temp	Color Selectable (3K, 4K, 5K) or 4K only
Operating Temp	-40°C to +40°C
Voltage	120-277*
LED Life	50,000 hours
Certification	cULus, IP65, DLC
Housing Material	Polycarbonate
Lens	Polycarbonate
Power Factor	0.9954
Total Harmonic Distortion	5.1
CRI	>83.2
Mounting	Surface or Pendant mounting



2 DIFFERENT VERSIONS:



**Color Selectable
Fixture**

3K, 4K, 5K COLOR SELECTABLE



**4K Color
Temperature Fixture**

4K ONLY



DESCRIPTION

The FW4-LED41 is a new improved product in the same design as the original FW4 product family. There are two different fixture types - the color selectable fixture (120 - 277V and 3K/4K/5K colour selectable) and the 4K color temperature fixture (120-277V, 4K)

APPLICATIONS



Underground
Parking
Garages



Industrial
Facilities



Poultry
Barns




Commercial
Freezers

FEATURES

- 4' Linear vapourproof LED fixture that replaces 2 lamp T8 fluorescent fixtures
- Polycarbonate housing with frosted lens for harsh environments
- 5 polycarbonate clips on either side
- Surface or pendant mount option

*The above specs apply to the standard product configuration - FW4-LED41-B-4K. For spec information on other product configurations please see page 3.

DIMENSIONS

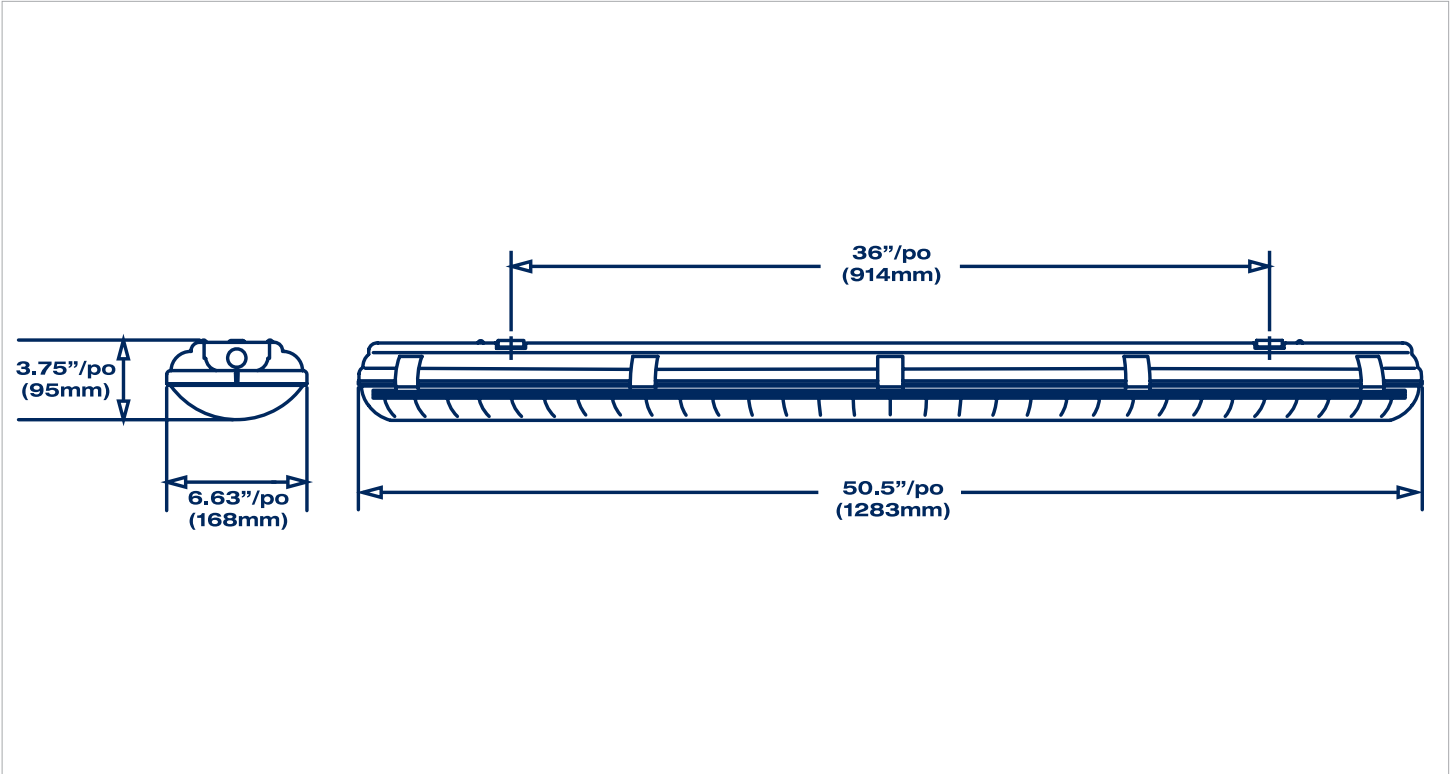

OTHER MODEL SPECIFICATIONS

MODEL DESCRIPTION	VOLTAGE (V)	INPUT POWER (W)	LIGHT OUTPUT	EFFICACY (Lm/W)	THD	PF	CCT	CRI
FW4-LED41-B-4K-DIM	120-277	42.54	5682.9	133.59	5.1	0.9954	4005	83.2
FW4-LED41-B-VK-DIM (3000K)	120-277	42.63	5044.9	118.34	2.9	0.9983	3170	83.4
FW4-LED41-B-VK-DIM (4000K)	120-277	40.46	5441	134.48	2.3	0.9992	3933	85.5
FW4-LED41-B-VK-DIM (5000K)	120-277	42.61	5254	123.3	2.68	0.9988	5122	84

LEGEND

B - 120V-277V

4K - 4000K, VK - Variable colour temperature

DIM - 0-10V DIMMING

2 DIFFERENT VERSIONS:



Color Selectable Fixture
3K, 4K, 5K COLOR SELECTABLE
ORDER CODE: FW4-LED41-B-VK-DIM

1



4K Color Temperature
4K ONLY
ORDER CODE: FW4-LED41-B-4K-DIM

2

ORDERING GUIDE

FW4	LED41	B		DIM
WATTS	VOLTAGE	COLOR TEMP.	DIMMING	
	B- 120-277V	VK - COLOR TUNABLE (can be changed to 3K, 4K, or 5K)	DIM- 0-10V DIMMING	
		4K - 4000K*		

*Standard Configuration.