



FW4-LED61

LED Vaporproof

SPECIFICATIONS*

| | |
|---------------------------|---|
| Watts | 61.92 |
| Lumens | 8458.8 |
| Efficacy | 136.61 lm/W |
| Replaces Up To | 2 Lamp T5HO |
| Color Temp | Color Selectable (3K, 4K, 5K) or 4K only |
| Operating Temp | -40°C to +40°C |
| Voltage | 120-277V* |
| LED Life | 50,000 hours |
| Certification | cULus, IP65, DLC |
| Housing Material | Polycarbonate |
| Lens | Polycarbonate |
| Power Factor | 0.9935 |
| Total Harmonic Distortion | 7.92 |
| CRI | >83.2 |
| Mounting | Surface or Pendant mounting |



2 DIFFERENT VERSIONS:



**Color Selectable
Fixture**

3K, 4K, 5K COLOR SELECTABLE



**4K Color
Temperature Fixture**

4K ONLY



DESCRIPTION

The FW4-LED61 is a new improved product in the same design as the original FW4 product family. There are two different fixture types - the color selectable fixture (120 - 277V and 3K/4K/5K colour selectable) and the 4K color temperature fixture (120-277V, 4K)

APPLICATIONS




**Underground
Parking
Garages**



**Industrial
Facilities**



**Poultry
Barns**




**Commercial
Freezers**

FEATURES

- 4' Linear vapourproof LED fixture that replaces 2 lamp T5HO fluorescent fixtures
- Polycarbonate housing with frosted lens for harsh environments
- 5 polycarbonate clips on either side
- Surface or pendant mount option

*The above specs apply to the standard product configuration - FW4-LED61-B-4K. For spec information on other product configurations please see page 3.

DIMENSIONS

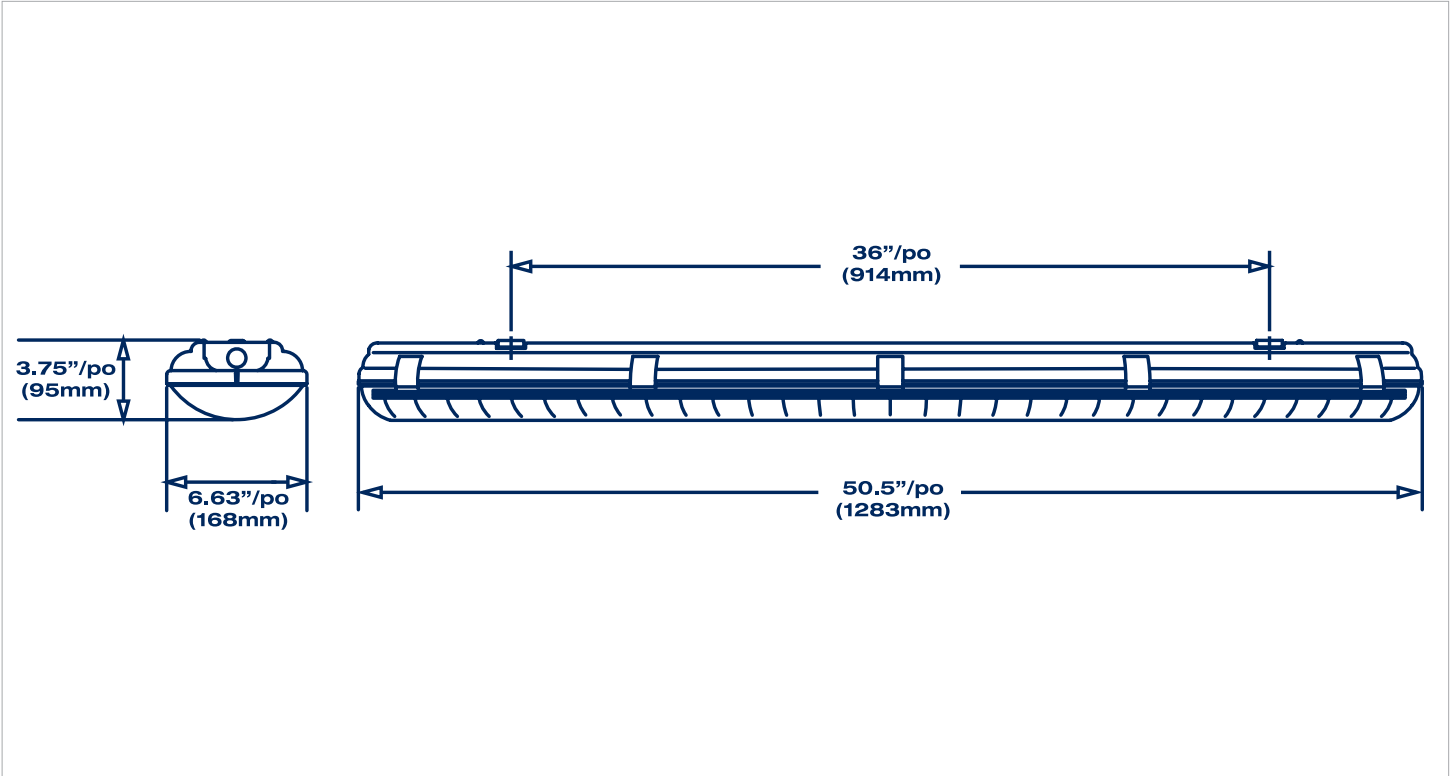

OTHER MODEL SPECIFICATIONS

| MODEL DESCRIPTION | VOLTAGE (V) | INPUT POWER (W) | LIGHT OUTPUT | EFFICACY (Lm/W) | THD | PF | CCT | CRI |
|----------------------------|-------------|-----------------|--------------|-----------------|------|--------|------|------|
| FW4-LED61-B-4K-DIM | 120-277 | 61.92 | 8458.8 | 136.61 | 7.92 | 0.9935 | 4010 | 83.2 |
| FW4-LED61-B-5K-DIM | 120-277 | 61.86 | 8589 | 138.85 | 7.21 | 0.9962 | 4967 | 83.6 |
| FW4-LED61-B-VK-DIM (3000K) | 120-277 | 62.57 | 7477.6 | 119.51 | 5.8 | 0.9969 | 3177 | 83.4 |
| FW4-LED61-B-VK-DIM (4000K) | 120-277 | 60.09 | 8071 | 134.32 | 5.01 | 0.9987 | 3929 | 85.6 |
| FW4-LED61-B-VK-DIM (5000K) | 120-277 | 62.97 | 7798 | 123.84 | 5.58 | 0.9973 | 5073 | 84.1 |

LEGEND

B - 120V-277V

4K - 4000K, VK - Variable colour temperature

DIM - 0-10V DIMMING

2 DIFFERENT VERSIONS:



Color Selectable Fixture
3K, 4K, 5K COLOR SELECTABLE
ORDER CODE: FW4-LED61-B-VK-DIM

1



4K Color Temperature
4K ONLY
ORDER CODE: FW4-LED61-B-4K-DIM

2

ORDERING GUIDE

| FW4 | LED61 | B | | DIM |
|-------|-----------------|--|--|-----|
| WATTS | VOLTAGE | COLOR TEMP. | | |
| | B - 120 - 277V* | 4K - 4000K* | | |
| | | VK - COLOR TUNABLE (can be changed to 3K, 4K, or 5K) | | |

*Standard Configuration.