



# GWL5-LED100

LED Wall Light



## SPECIFICATIONS\*

Watts	98
Lumens	11780
Efficacy	121
Replaces Up To	250W HPS
Colour Temp	5000K*
Certification	cULus, IP65, DLC
Operating Temp	-40°C to +40°C
Voltage	120-277V*, 347V
LED Life	100,000 Hours
Housing Material	Cast Aluminum
Lens Material	Polycarbonate
Finish	Bronze
Total Harmonic Distortion	14.41%
Power Factor	>0.95
Mounting Options	Wall Mounted

\*Standard



## DESCRIPTION

The GWL-LED fixtures are compact in design, have an easy installation feature and a high efficacy of over 100 lumens per watt. The GWL5-LED100 is an easy to install, full cut-off wall pack.

## APPLICATIONS



Entrances  
and Exits



Offices



Condos

## FEATURES


- Fixture is designed to hook and secure itself on top of the housing so installer can use both hands to connect wires easily.
- The backbox has a built-in level bubble to facilitate mounting alignment
- Die cast aluminum housing with stainless steel hardware
- The fixture can be surface mounted onto a junction box or directly mounted on the wall

\*The above specs apply to the standard product configuration. For spec information on other product configurations please see page 2.


**NOTE:** Not all of our product configurations are qualified on the DLC QPL. To view all of our DLC qualified products please visit the DLC qualified products list at [www.designlights.org/qpl](http://www.designlights.org/qpl).

**CANDELA PLOTS**

**GWL5-LED100-B-4K**  
MOUNTED AT 24 FEET

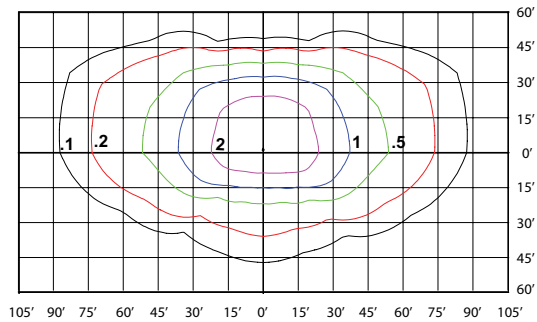

## DIMENSIONS

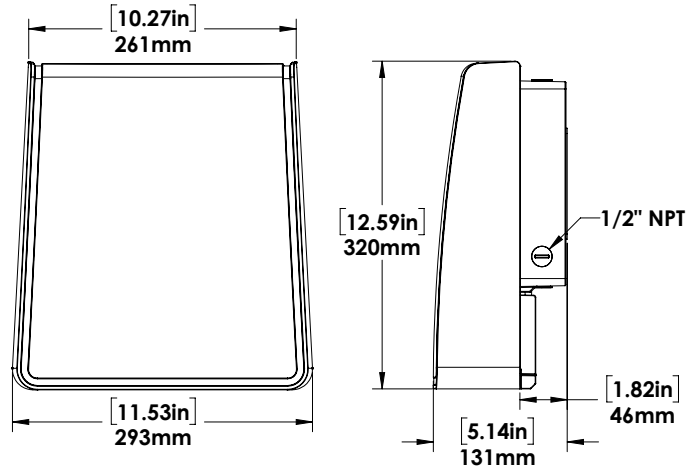

## EASY INSTALLATION

**1**



Open fixture, mount back box to junction box

**2**



Hook fixture on top of the housing and easily connect wires using both hands

**3**



Unhook fixture from housing, flip over and reattach fixture to housing

**4**



Push fixture against housing and tighten screw(s) below lens

OTHER MODEL SPECIFICATIONS

MODEL DESCRIPTION	VOLTAGE (V)	INPUT POWER (W)	LIGHT OUTPUT	EFFICACY (Lm/W)	THD	PF	CCT(K)	CRI
GWL5-LED100-B-5K-XXX	120-277	95.84	10007	104.41	14.21	0.9484	5000	83.1
GWL5-LED100-L-5K-XXX	480V	103.9	10304	99.17	21.48	0.9555	5000	83.2

LEGEND

B - 120V-277V, L -480V  
5K - 5000K,  
XXX - HOUSING FINISH

ORDERING GUIDE

GWL5	LED100			
WATTS	VOLTAGE	COLOR TEMP.	FINISH	
	B - 120 - 277V*	5K - 5000K*	BRZ - BRONZE*	
	L - 480V			