



ORA1-LED15

LED Wall/Flood Light

SPECIFICATIONS*

Watts	15.64W
Lumens	1509.9
Efficacy	97.15 lm/W
Replaces Up To	50W MH
Color Temp	3000K, 4000K, 5000K
Certification	cULus, IP65
Operating Temp	-40°C to +40°C
Voltage	120-277V, 480V in wall mount
LED Life	100,000 hours
Housing Material	Aluminum
Lens Material	Polycarbonate
Beam Pattern	100,000 hours
Total Harmonic Distortion	18.41
Power Factor	0.912

Mounting Options Yoke Mount, Knuckle Mount, Wall Mount

*Standard

**Bullhorn brackets must be ordered with slip fit



DESCRIPTION

The ORA-LED is a cost effective multi-purpose fixture that replaces traditional wall packs or floods. The ORA features a sleek, elegant design with multiple mounting options.

APPLICATIONS



Town Houses



Condos



Perimeter Lighting



Shopping Malls

FEATURES

- Elegant, sleek design with a modern look
- Cost effective wall / flood light option with a competitive efficacy
- Versatile fixture available in three mounting options – knuckle, yoke and wall mount


*The above specs apply to the standard product configuration. For spec information on other product configurations please see page 2.

NOTE: Not all of our product configurations are qualified on the DLC QPL. To view all of our DLC qualified products please visit the DLC qualified products list at www.designlights.org/qpl.


DIMENSIONS




Wall Mount

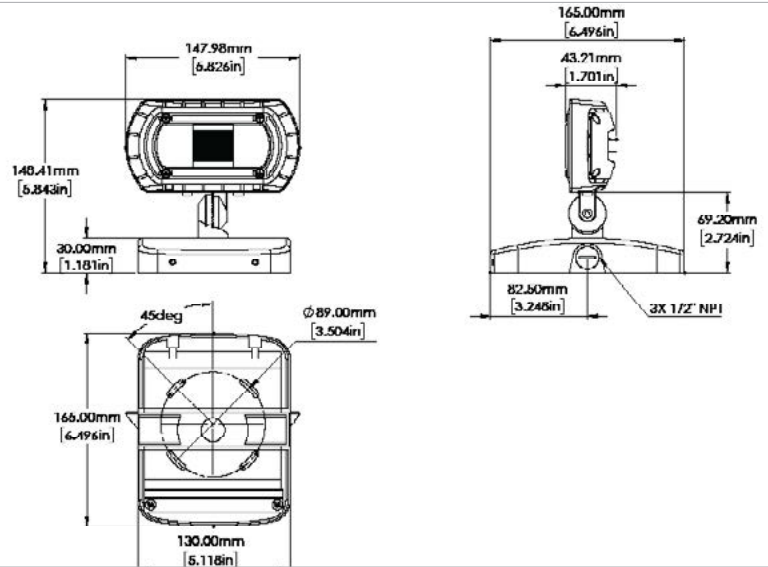

Yoke Mount

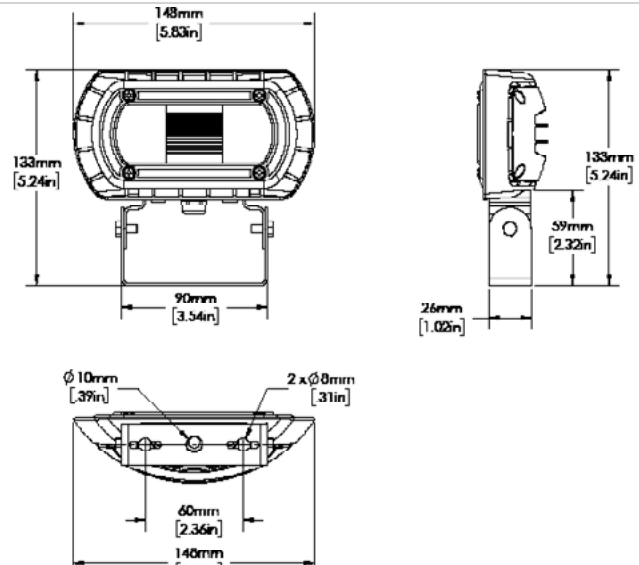


Knuckle Mount

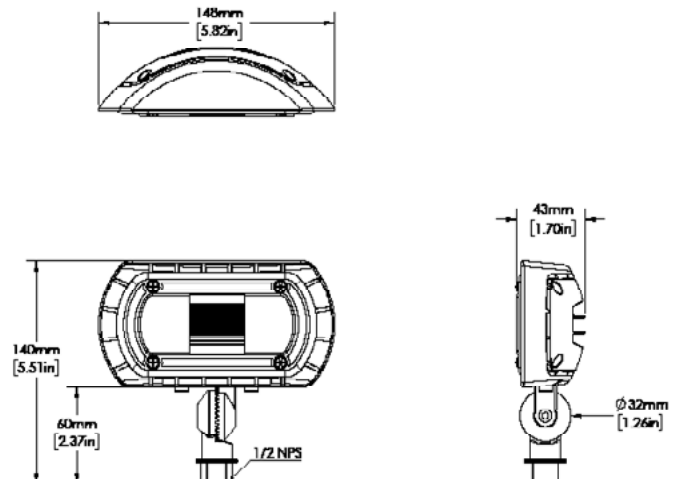

OTHER MODELS SPECIFICATIONS

MODEL DESCRIPTION	VOLTAGE (V)	INPUT POWER (W)	LIGHT OUTPUT	EFFICACY (Lm/W)	THD	PF	CCT(K)	CRI
ORA1-LED15-[A, B]-3K-XXX-XX	120, 120-277	15.88	1486.5	94.02	18.35	0.917	3000	72.6
ORA1-LED15-[A, B]-3K-XXX-XX [Qualified Pointing Straight Down]	120, 120-277	15.88	1486.5	94.02	18.35	0.917	3000	72.6
ORA1-LED15-L-3K-XXX-XX	480	17.02	1747.9	102.7	18.37	0.9286	3000	72.5
ORA1-LED15-[A, B]-4K-XXX-XX	120, 120-277	15.64	1509.9	97.15	18.41	0.912	4000	72.9
ORA1-LED15-[A, B]-4K-XXX-XX [Qualified Pointing Straight Down]	120, 120-277	15.64	1509.9	97.15	18.41	0.912	4000	72.9
ORA1-LED15-L-4K-XXX-XX	480	17.04	1771	103.93	18.26	0.9264	4000	73
ORA1-LED15-[A, B]-5K-XXX-XX	120, 120-277	15.69	1537.9	98.02	18.59	0.913	5000	72.6
ORA1-LED15-[A, B]-5K-XXX-XX [Qualified Pointing Straight Down]	120, 120-277	15.69	1537.9	98.02	18.59	0.913	5000	72.6
ORA1-LED15-L-5K-XXX-XX	480	17.16	1785	104.02	18.3	0.9276	5000	72.8

PHOTOMETRICS

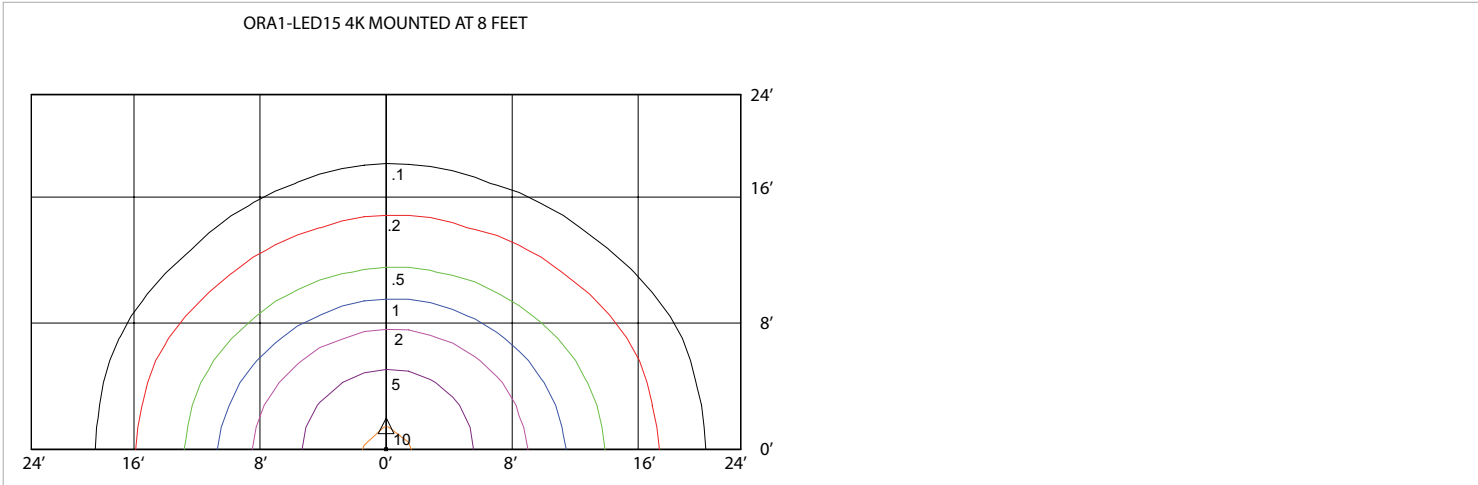

ORDERING GUIDE

ORA1						
WATTS	VOLTAGE	COLOUR TEMP.	FINISH	MOUNTING	OPTIONS	
LED15	B - 120 - 277V*	3K - 3000K	BRZ - BRONZE*	KN-Knuckle	WMD - Decorative Wall Mount bracket without conduit entries	
	L-480V	4K - 4000K*	CC - CUSTOM	YK - Yoke		
		5K - 5000K		WM - Wall Mount		

* Standard configuration