



ORA2-LED30

LED WALL / FLOOD LIGHT



SPECIFICATIONS*

Watts	30W
Lumens	3359
Efficacy	112 lm/W
Replaces Up To	100W MH 500W Quartz
Color Temp	3000K, 4000K, 5000K
Certification	cULus, DLC, IP65
Operating Temp	-40°C to +40°C
Voltage	120-277V, 480V in wall mount
LED Life	100,000 hours
Housing Material	Aluminum
Lens Material	Polycarbonate
Total Harmonic Distortion	18.57%
Power Factor	0.9817
Mounting Options	Yoke Mount, Knuckle Mount, Wall Mount



DESCRIPTION

The ORA-LED is a fully adjustable multi-purpose fixture that replaces traditional wall packs or floods. The ORA features a sleek, elegant design with multiple mounting options.

APPLICATIONS



Town Houses



Condos



Perimeter
Lighting



Shopping Malls

FEATURES

- Elegant, sleek design with a modern look.
- Fixture head may be aimed down for dark sky compliance, or aimed out as needed.
- Three mounting options available – knuckle, yoke and wall mount.


*The above specs apply to the standard product configuration. For spec information on other product configurations please see page 3.

NOTE: Not all of our product configurations are qualified on the DLC QPL. To view all of our DLC qualified products please visit the DLC qualified products list at www.designlights.org/qpl.


DIMENSIONS




Wall Mount

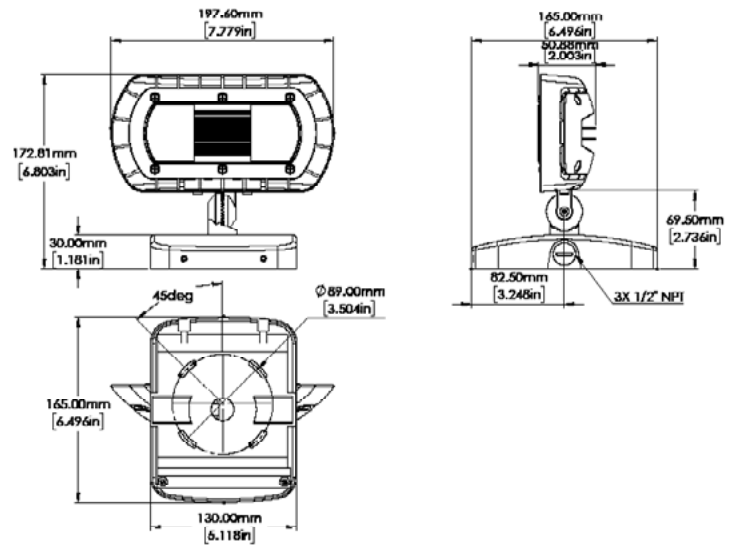

Yoke Mount

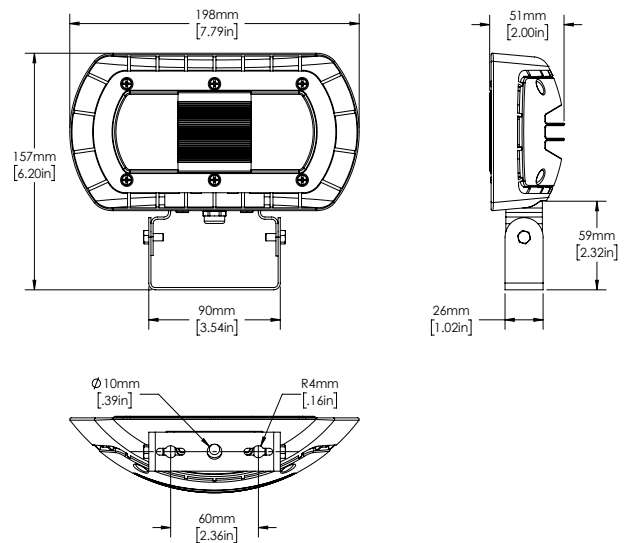

Knuckle Mount

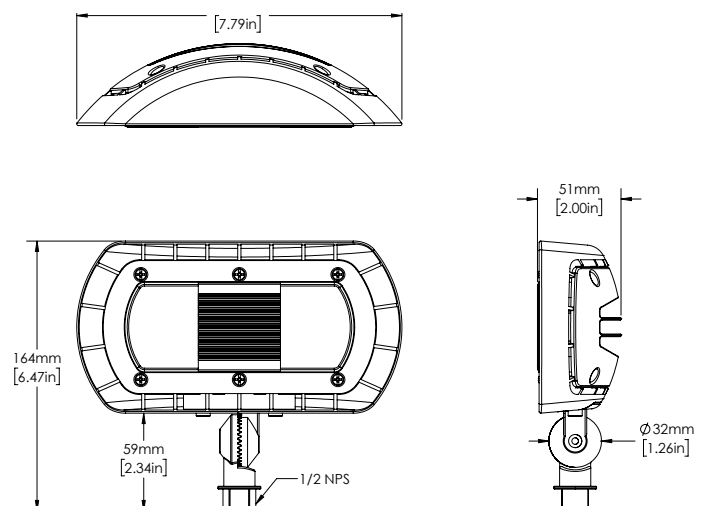

SPECIFICATIONS

MODEL DESCRIPTION	VOLTAGE (V)	INPUT POWER (W)	LIGHT OUTPUT	EFFICACY (Lm/W)	THD	PF	CCT(K)	CRI
ORA2-LED30-[A, B]-3K-XXX-XX	120, 120-277	31.93	3246.8	101.68	18.41	0.921	3000	72.6
ORA2-LED30-[A, B]-3K-XXX-XX [Qualified Pointing Straight Down]	120, 120-277	31.93	3246.8	101.68	18.41	0.921	3000	72.6
ORA2-LED30-L-3K-XXX-XX	480	34.51	3587.2	103.95	13.02	0.9539	3000	72.5
ORA2-LED30-[A, B]-4K-XXX-XX	120, 120-277	31.82	3312.6	104.1	18.57	0.919	4000	70
ORA2-LED30-[A, B]-4K-XXX-XX [Qualified Pointing Straight Down]	120, 120-277	31.82	3312.6	104.1	18.57	0.919	4000	70
ORA2-LED30-L-4K-XXX-XX	480	34.37	3613	105.12	13.16	0.9545	4000	73.6
ORA2-LED30-[A, B]-5K-XXX-XX	120, 120-277	31.9	3351.3	105.06	18.45	0.92	5000	70
ORA2-LED30-[A, B]-5K-XXX-XX [Qualified Pointing Straight Down]	120, 120-277	31.9	3351.3	105.06	18.45	0.92	5000	70
ORA2-LED30-L-5K-XXX-XX	480	34.51	3634	105.3	14.26	0.9542	5000	73.3

Legend

B - 120-277V, L-480V


4K - 4000K

XXX- Finish

XX- Mounting


PHOTOMETRICS

ORA2-LED30 4K MOUNTED AT 12 FEET - WALL MOUNT ORIENTATION

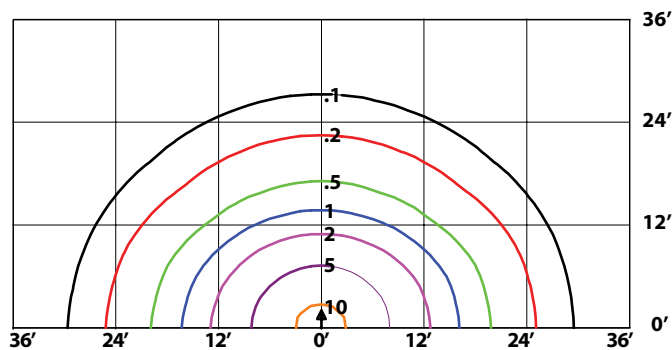


ARCHITECTURAL WALL MOUNT

For architectural wall mount version order ORA knuckle mount with architectural backbox separately

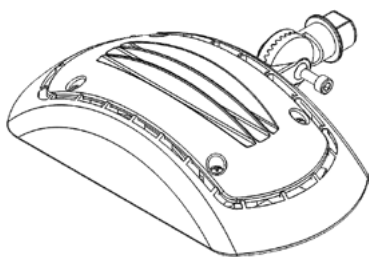

Step One

Remove screw from knuckle mount

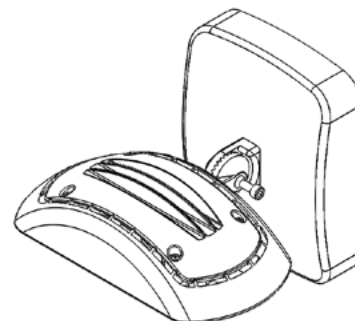

Step Two

Mount on bracket with wiring and tighten screw

ORDERING GUIDE

ORA2					
	WATTS	VOLTAGE	COLOR TEMP.	FINISH	MOUNTING
	LED30	B - 120 - 277V*	3K -3000K	BRZ - BRONZE*	KN-Knuckle
		L-480V	4K - 4000K*		YK - Yoke
			5K -5000K		WMC - Wall Mount with 3 conduit entries

* Standard configuration

FIELD INSTALLED ACCESSORIES

CHECK THE ACCESSORIES YOU WISH TO ORDER:

ORA1/2 WALL MOUNT with 3 Conduit Entries Bronze

ORA1/2 Architectural Wall Mount Bracket without
conduit entries Bronze