



ORA4-LED80

LED WALL / FLOOD LIGHT



SPECIFICATIONS*

Watts	78W
Lumens	8827
Efficacy	113lm/W
Replaces Up To	250W MH
Color Temp	3000K, 4000K, 5000K
Certification	cULus, DLC, IP65
Operating Temp	-40°C to +40°C
Voltage	120-277V, 480V in wall mount
LED Life	100,000 Hours
Housing Material	Aluminum
Lens Material	Polycarbonate
Total Harmonic Distortion	20.36%
Power Factor	0.9743
Mounting Options	Yoke Mount, Knuckle Mount, Wall Mount



DESCRIPTION

The ORA-LED is a fully adjustable multi-purpose fixture that replaces traditional wall packs or floods. The ORA features a sleek, elegant design with multiple mounting options.

APPLICATIONS



Town Houses



Condos



Perimeter
Lighting



Shopping Malls

FEATURES

- Elegant, sleek design with a modern look.
- Fixture head may be aimed down for dark sky compliance, or aimed out as needed.
- Three mounting options available – knuckle, yoke and wall mount.


*The above specs apply to the standard product configuration. For spec information on other product configurations please see page 3.

NOTE: Not all of our product configurations are qualified on the DLC QPL. To view all of our DLC qualified products please visit the DLC qualified products list at www.designlights.org/qpl.


DIMENSIONS




Wall Mount

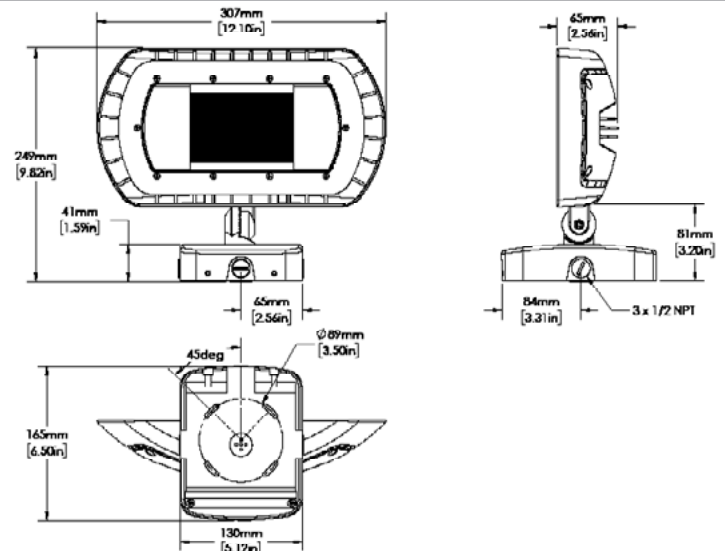

Yoke Mount

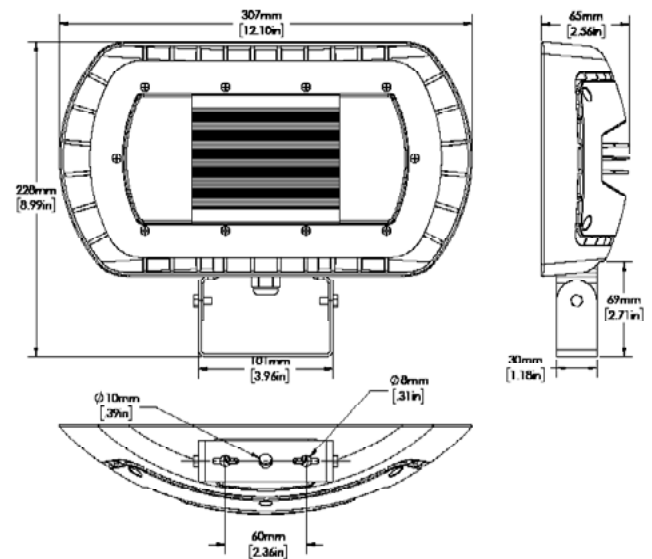

Knuckle Mount

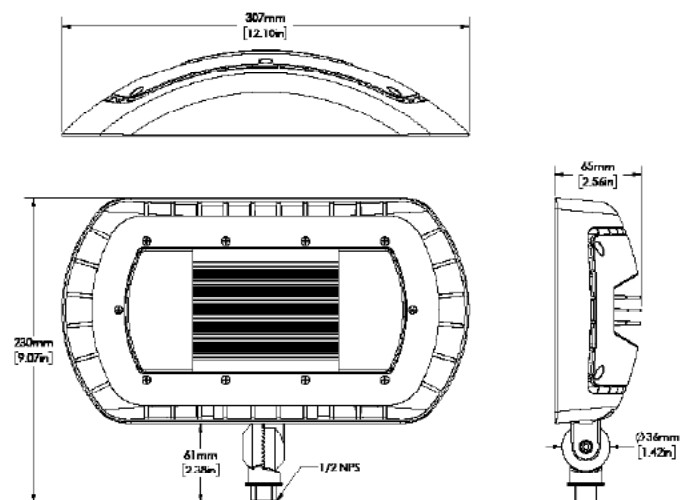

SPECIFICATIONS

MODEL DESCRIPTION	VOLTAGE (V)	INPUT POWER (W)	LIGHT OUTPUT	EFFICACY (Lm/W)	THD	PF	CCT(K)	CRI
ORA4-LED80-[A, B]-3K-XXX-XX	120, 120-277	78.59	8622.5	109.92	20.23	0.922	3000	72.9
ORA4-LED80-[A, B]-3K-XXX-XX [Qualified Pointing Straight Down]	120, 120-277	78.59	8622.5	109.92	20.23	0.922	3000	72.9
ORA4-LED80-L-3K-XXX-XX	480	85.3	8792	103.07	18.31	0.9509	3000	72.5
ORA4-LED80-[A, B]-4K-XXX-XX	120, 120-277	77.9	8694.3	111.75	20.36	0.921	4000	70
ORA4-LED80-[A, B]-4K-XXX-XX [Qualified Pointing Straight Down]	120, 120-277	77.9	8694.3	111.75	20.36	0.921	4000	70
ORA4-LED80-L-4K-XXX-XX	480	83.26	8647	103.86	18.44	0.9502	4000	72.5
ORA4-LED80-[A, B]-5K-XXX-XX	120, 120-277	77.87	8847.5	113.62	20.39	0.921	5000	70
ORA4-LED80-[A, B]-5K-XXX-XX [Qualified Pointing Straight Down]	120, 120-277	77.87	8847.5	113.62	20.39	0.921	5000	70
ORA4-LED80-L-5K-XXX-XX	480	83.79	8734	104.24	18.2	0.9513	5000	72.8

Legend

B - 120-277V, L - 480V


4K - 4000K

XXX- Finish

XX- Mounting


PHOTOMETRICS

ORA4-LED80 4K MOUNTED AT 20 FEET - WALL MOUNT ORIENTATION

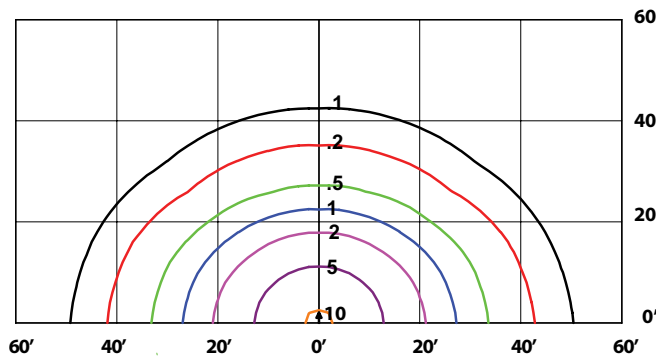


ARCHITECTURAL WALL MOUNT

For architectural wall mount version order ORA knuckle mount with architectural backbox separately

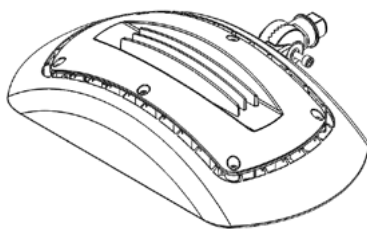

Step One

Remove screw from knuckle mount

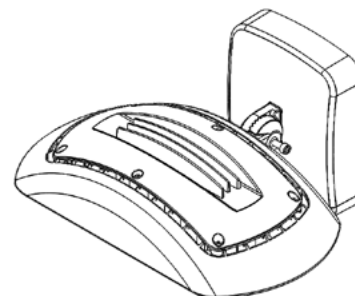

Step Two

Mount on bracket with wiring and tighten screw

ORDERING GUIDE

ORA4						
WATTS	VOLTAGE	COLOR TEMP.	FINISH	MOUNTING	OPTIONS	
LED80	B - 120 - 277V*	3K - 3000K	BRZ - BRONZE*	KN-Knuckle	PC - Photocell	
	L - 480V	4K - 4000K*		YK - Yoke		
		5K - 5000K		WMC -Wall Mount with 3 conduit entries		

* Standard configuration

FIELD INSTALLED ACCESSORIES

CHECK THE ACCESSORIES YOU WISH TO ORDER:

Wall mount with 3 Conduit Entries Bronze

Architectural Wall Mount Bracket without conduit entries
Bronze