



## SL2-LED20

### LED Strip Light

#### SPECIFICATIONS\*

Watts	21
Lumens	2551
Efficacy	120.5
Replaces Up To	2 Lamp T8 17W
Color Temp**	Variable - 3K, 4K, 5K
Certification	cULus, IP20, DLC
Operating Temp	-30°C to +40°C
Voltage	120-277*
LED Life	50,000 hours
Housing Material	Steel
Lens Material	Polycarbonate
Lens Type	Frosted
Mounting	Surface mount, suspended mounting using linear ceiling pendant mount kit.
Total Harmonic Distortion	3.96
Power Factor	0.99

\*Standard

\*\*Colour temperature is variable and can be adjusted on the fixture with a switch. The default switch setting is set to 4K on the fixture. Light output varies according to the colour temperature selected as seen in the spec table on page 2.



## DESCRIPTION

The SL2-LED20 strip light provides a highly efficient lumen output of approx. 2500 lumens ideal for replacing 2 Lamp T8 17W fixtures. The frosted linear lens provides uniform light distribution ideal for use in shops, coves and general area lighting.

## APPLICATIONS



Shops



Cove Lighting



General Area Lighting

## FEATURES

- Fixture can be set at a color temperature of 3000K, 4000K or 5000K through a switch inside the housing
- Narrow, linear design with frosted lens for uniform light distribution
- Join up to 35 fixtures on a single circuit using easy connector steel plates.
- Options: dimming high frequency sensor, wire cage, reflector wings, linear ceiling pendant mount kit

\*The above specs apply to the standard product configuration. For spec information on other product configurations please see page 2.

## OTHER MODEL SPECIFICATIONS

DESCRIPTION	VOLTAGE (V)	INPUT POWER (W)	LIGHT OUTPUT	EFFICACY (Lm/W)	THD	PF	CCT	CRI
SL2-LED20-B-VK-DIM	120-277	21.82	2332.2	106.88	3.44	0.9937	3133	82.8
	120-277	21.17	2551	120.5	3.96	0.9916	3956	85.8
	120-277	21.51	2331	108.37	3.6	0.9932	5073	85.7

### LEGEND


B - 120V-277V

VK - Variable CCT


Colour temperature is variable and can be adjusted on the fixture with a switch.  
Light output varies according to the colour temperature selected as seen in above table.

DIM - 0-10V Dimming


## DIMENSIONS

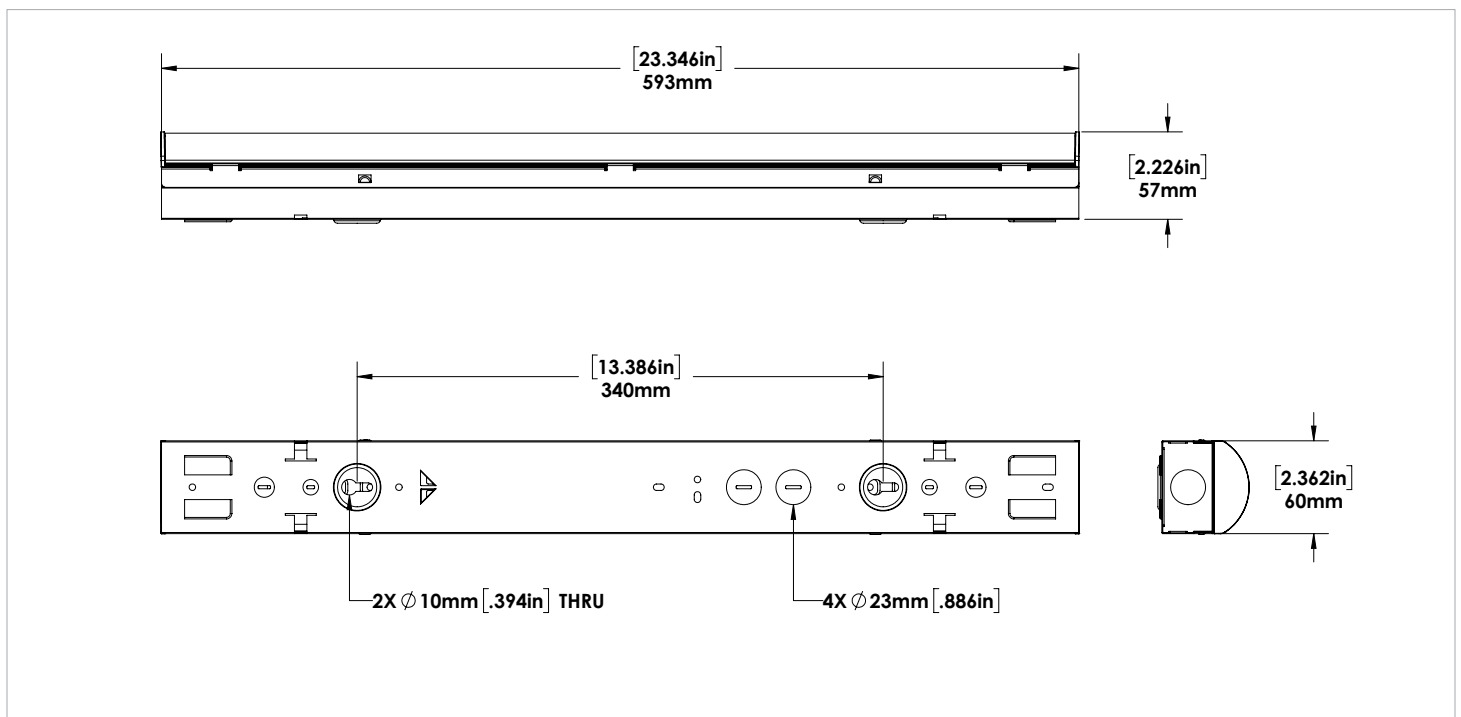

## COLOR TUNABLE SWITCH

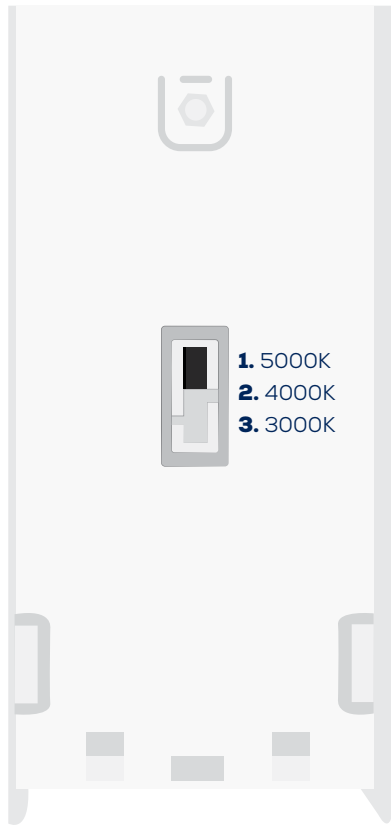

The switch is located inside of the fixture.

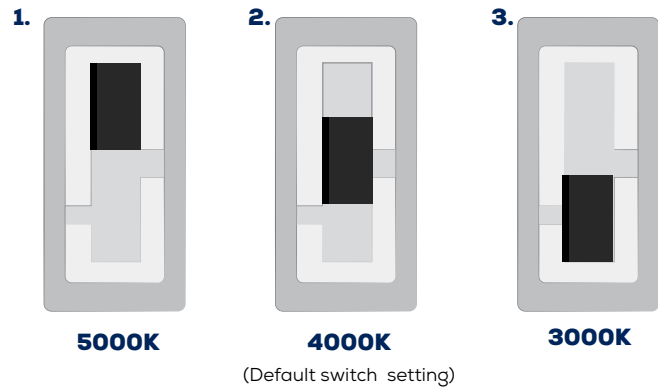

**Easily change the color temperature with the flip of a switch.**

- 1. TOP position = 5000K
- 2. MIDDLE position = 4000K
- 3. BOTTOM position = 3000K

## ACCESSORIES

### Linear Ceiling Pendant Mount Kit

Contains 2 x 5 foot aircraft cables with ceiling mounting plates, fixture mounting rod and nut, 6 drywall anchors, and 6 screws.



SKU 051331


## ACCESSORIES



### Extension Box for Sensor

High frequency motion sensor is installed inside extension box. Motion sensor can be attached to a single fixture and connected to a row of up to 15 fixtures.

Sensor will be added in the factory.

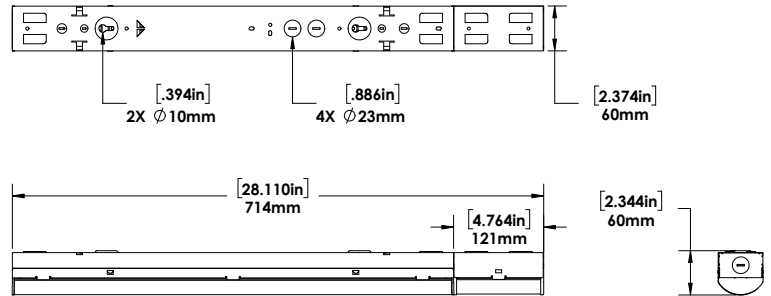


## REFLECTOR WINGS



### Reflector Wings Kit - Wings attach by inserting tabs into the cutouts on the fixture

SKU 051574




## WIRE CAGE



Fixture shown with wire cage


**Wire Cage** - Wire cage has been designed to accommodate the motion sensor box. To install, place wire cage over the fixture and screw the clips on to the mounting surface. SL2 has 4 clips.

SKU 051575

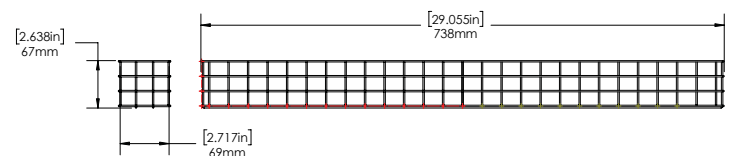

## PHOTOMETRICS

SL2-LED20-B-VK-DIM  
MOUNTED AT 8 FEET

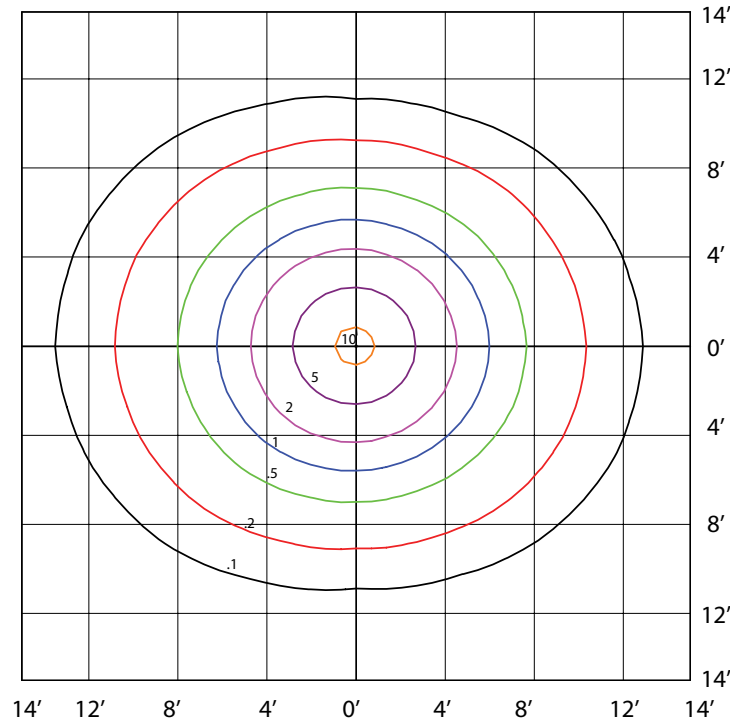

## ORDERING GUIDE

SL2	LED20				
WATTS	VOLTAGE	COLOR TEMP.	DRIVER	OPTIONS	
	B - 120 - 277V*	VK - COLOR TUNABLE (can be adjusted to 3K, 4K, or 5K)	DIM - 0-10V Dimming*	DHFS - Dimming High Frequency Sensor	

\*Standard Configuration.

## FIELD INSTALLED ACCESSORIES

### CHECK THE ACCESSORIES YOU WISH TO ORDER:

- 051331 LINEAR CEILING PENDANT MOUNT KIT
- 051574 SL2-LED REFLECTOR WINGS KIT - WHT
- 051575 SL2-LED WIRE CAGE