


The Slot step light is great for general low light levels with low glare. With the aluminum faceplate pattern this unit can take abuse and continue to provide great performance.

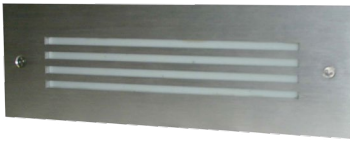

### APPLICATIONS

**Ideal for theatres and auditoriums.**

Project	
Type	
Date	
Notes	

### SPECIFICATIONS

#### Housing

Metal housing with two knock out power entries 7/8" KO. Housing has a white polyester powder coat finish and can be used for concrete pours.

#### Diffusor

Polycarbonate available in white or clear.

#### Fasteners

Captive and recessed stainless steel.

#### Mounting

For concrete pour only. For indoor and outdoor use.

#### LED's

Available with S 1.2 watt with an integral driver. LEDS are available in White, Blue, Red and Green. They are also available with a narrow, medium or wide beam lens. Drivers are line voltage in at 120 volts. LED's have a life of 60,000 hours.

#### Drivers

All drivers are integral 120 volts power in.

#### Face Plate


Face plate is made of aluminum with a polyester powder coat finish.

#### Finish

All units have a polyester powder coat finish. Standard colours are Sparkle Silver, Charcoal, Black and White. For custom colours please consult factory.

<b>Fixture Watts</b>	<b>8W</b>
<b>Rated Life</b>	<b>100,000 hours</b>
<b>LED Color</b>	<b>White, Blue, Red, Green</b>
<b>Warranty</b>	<b>5 Years</b>
<b>Operating temperature</b>	<b>-40° C to +40° C</b>

### DIMENSIONS

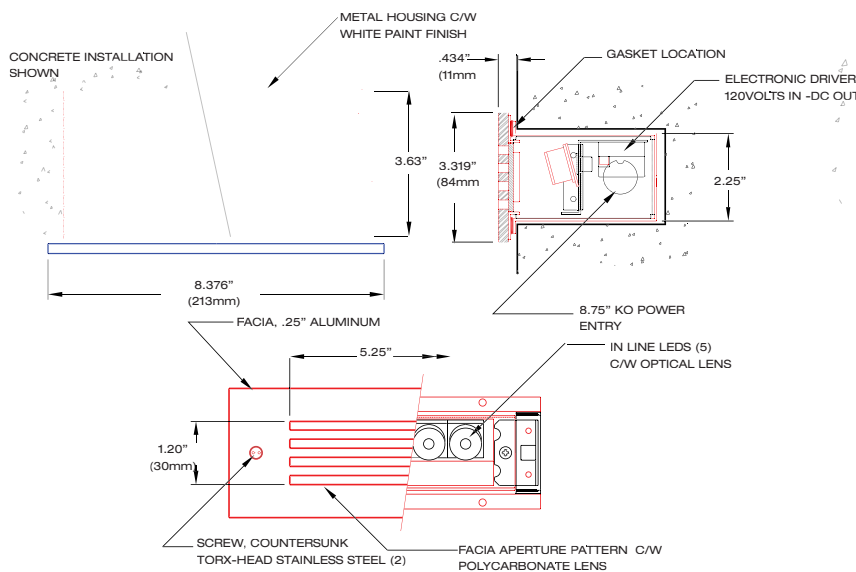

## ORDERING GUIDE

<b>SLOT</b>	-		-		-	
<b>LED COLOR</b>		<b>BEAM</b> (for LEDs only)		<b>VOLTAGE</b>		<b>FINISH</b>
1W- White		Narrow		A - 120V		SPS- Sparkle Silver
1R - Red		Medium				BLK - Black
1B - Blue		Wide				WHT - White
1G - Green						CHA - Charcoal
1A - Amber						CC - Custom color

\* Standard configuration