



WP-LED120

LED Wall Light



SPECIFICATIONS*

Watts	118.71
Lumens	14,706.33
Efficacy	123.9
Replaces Up To	400W MH
Colour Temp	3,000K, 4,000K, 5,000K*
Operating Temp	-40°C to +40°C
Voltage	120-277*, 480
LED Life	100,000 hours
Lens Material	Clear Stippled Tempered Glass
Power Factor	0.991
Total Harmonic Distortion	15.3%
CRI	72.0

*Standard



DESCRIPTION

The WP-LED fixtures are energy efficient wall lights with a traditional look. Available in 3 wattages (42W, 80W, 120W), they serve as ideal replacements for 150W, 250W or 400W HID fixtures.

APPLICATIONS



Entrances



Back Doors



Loading Docks



Perimeter Lighting

FEATURES

- Side hinged die cast aluminum body.
- Replaces 400W MH wall packs.
- Clear stippled tempered glass lens.
- Durable powder coat paint finish.
- Photocell optional.


OTHER MODEL SPECIFICATIONS

MODEL DESCRIPTION	VOLTAGE (V)	INPUT POWER (W)	LIGHT OUTPUT	EFFICACY (Lm/W)	THD	PF	CCT	CRI
WP-LED120-B-3K-XXX-XX-CL	120-277	118.56	13436.05	113.3	15.3	0.991	3000	71.5
WP-LED120-B-4K-XXX-XX-CL	120-277	118.71	14071.19	118.5	15.3	0.991	4000	72.0
WP-LED120-B-5K-XXX-XX-CL	120-277	118.71	14706.33	123.9	15.3	0.991	5000	72.0
WP-LED120-L-3K-XXX-XX-CL	480	118.63	13796.68	116.3	15.3	0.970	3000	71.5
WP-LED120-L-4K-XXX-XX-CL	480	118.6	14249.19	120.1	15.3	0.970	4000	72.0
WP-LED120-L-5K-XXX-XX-CL	480	118.6	14701.71	123.9	15.3	0.970	5000	72.0

LEGEND

B - 120V-277V, L - 480V
 3K - 3000K 4K - 4000K, 5K - 5000K
 XXX - Housing Finish
 XX- PC Option
 CL - Clear Lens

DIMENSIONS

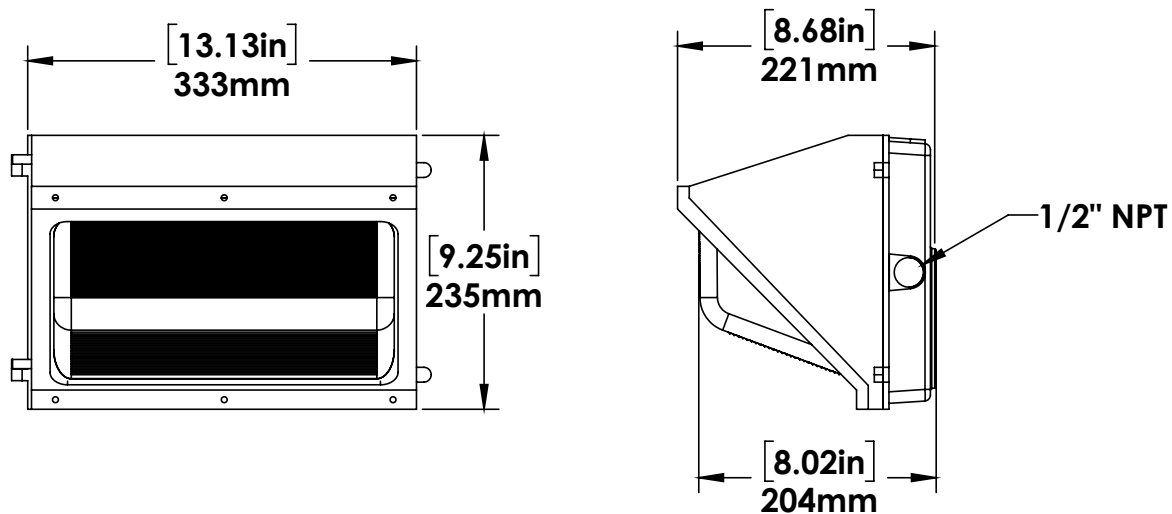

Weight = 7lbs

JUNCTION BOX MOUNTING HOLE PATTERN

ORDERING GUIDE

WP						
WATTS	VOLTAGE	COLOUR TEMP.	FINISH	OPTIONS	LENS TYPE	
LED120	B - 120 - 277V*	3K - 3000K	BRZ - BRONZE*	PC - PHOTOCELL	CL - CLEAR	
	L - 480V	4K - 4000K	CC - CUSTOM COLOUR	BLANK - NO PHOTOCELL		
		5K - 5000K*				

*Standard Configuration.