



### APPLICATIONS

Ideal for retail buildings, schools, townhouse complexes and apartment buildings

The WRDS-LED is a decorative, energy efficient down light in a round cylindrical shape that can be used in a variety of commercial and residential applications.

Project	
Type	
Date	
Notes	

### SPECIFICATIONS

#### Construction

The WRDS-LED24 is a decorative fixture with a die cast aluminum housing and a clear tempered glass lens held in place with a gasket, lens frame and three stainless steel screws.

#### Mounting

The fixture can be wall mounted to standard junction boxes. Unit can also be surface mounted with power from conduit entry.

#### LED Configuration

The fixture delivers a total lumen output of 2445 lumens at an efficacy of 111 lumens/watt. The LEDs have a color temperature of 5000K.

#### Electrical

Total system wattage of the unit is 22W. The standard unit has a high efficiency driver that operates at 120-277V.


#### Finish

Black powder coat paint finish.

Equivalent to	100W MH
Watts	22W
Lumens	2445
Efficacy	111 lumens/watt

LED Life	100,000 hours
Color Temperature	5000K
Warranty	5 Years
Operating Temperature	-40° C to +40° C
Certification	cULus, DLC
Power Factor	0.9
CRI	>80
Total Harmonic Distortion	13.86%

### DIMENSIONS

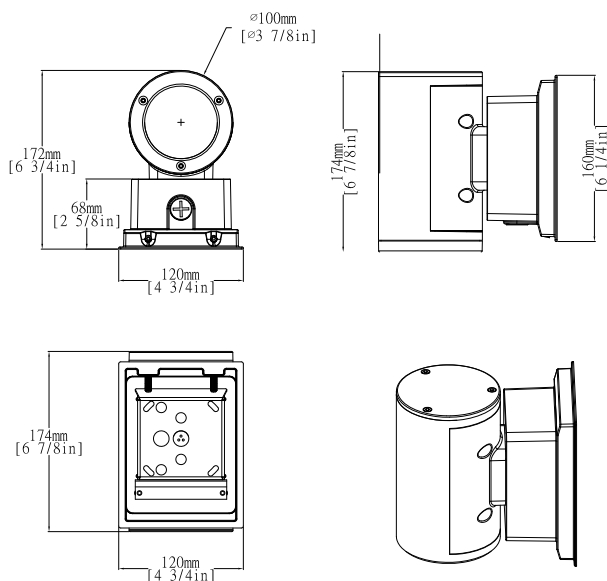

### ORDERING GUIDE

WRDS	-	LED24	-		-	
------	---	-------	---	--	---	--

VOLTAGE

COLOR TEMP

FINISH

\* Standard configuration

B - 120 - 277V\*

5K - 5000K\*

BLK - BLACK\*

