



## TUFF DOME OUTDOOR SENSOR

*The Tuff Dome can switch up to 500 watts incandescent. Colour matched vandal proof lens. Full 180 degree view. Unit can be wired in parallel.*

**AUTO TEST LOGIC** 5 minutes of test time when powered. Resets to auto mode without further adjustment.

**COLOUR MATCHED LENS** Dark lens with bronze units and white lens with white units.

**LED DETECTION INDICATOR** Led glows red day and night for on-guard deterrence.

**MANUAL OVERRIDE** Double flip wall switch logic prevents activation by brief power outages. Resets after 8 hours. No extra wiring needed.

**PHOTOELECTRIC CONTROL** Deactivates lights during daylight. Fully adjustable for 24 hour operation or custom applications. Quick test time : 5 second test time for fast installation. Works day or night.

**RF IMMUNITY** Circuits fully shielded for maximum radio frequency immunity.

**ADJUSTMENTS** Time, ambient light & sensitivity.

**SURGE PROTECTION** Withstands up to 3000 volts.


**TIME ADJUSTMENTS** 5 seconds to 15 minutes.

**HUBS** Three hubs with plugs installed for mounting fixtures 1/2" npt.

**WIDE SENSITIVITY CONTROL** Adjustable from 100% to 30%



### DETECTION PATTERN

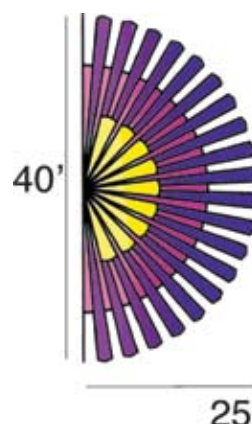

**DETECTION** Full 180 degrees.

**SWITCHING CAPACITY** 500 watts incandescent 120 volts

**VOLTAGE** 120 volts AC 60 Hertz.  
Approval UL and CUL

**The following fixtures can be used with the STUFF500 QB, Q1, Q3, QF150, QF300, QF500, HL150Q AND HL500Q**

## Catalog Code

**STUFF500**

BRZ - BRONZE  
WH - WHITE

FINISH

The following fixtures can be used with the STUFF500 QB, Q1, Q3, QF150, QF300, QF500, HL150Q AND HL500Q

## Dimensions

