



TYKE FLOOD

The tyke Flood is a small, rugged floodlight ideal for walkways, building perimeters, and building facades.

HOUSING Precision die cast aluminum with 1/2" NPT swivel arm. Housing and arm have a powder coat paint finish.

REFLECTOR Anodized aluminum.

LENS FRAME Precision die cast aluminum with a continuous silicone gasket. Bottom hinged for ease of lamp replacement. Lens frame is held in place with stainless steel clip and locking screw.

LENS Clear tempered glass with a silicone gasket.

BALLAST High Pressure sodium ballasts are available as 120 volts Normal Power Factor for the following wattage, 50, 70, 100 and 150.

LAMP All units come complete with lamp.



SOCKET Medium base 4KV pulse-rated socket with a nickel-plated screw shell and a spring-loaded centre contact.

MOUNTING 1/2" heavy duty swivel arm.

FINISH Powder coat paint finish. Standard colour is bronze.

OPTIONS Photocell

Catalog Code

TF

50HPS 70HPS
100HPS 150HPS

LAMP

120NPF

120NPF

VOLTAGE

BRZ

BRZ - BRONZE


FINISH

PC - PHOTOCELL

OPTIONS



Dimensions

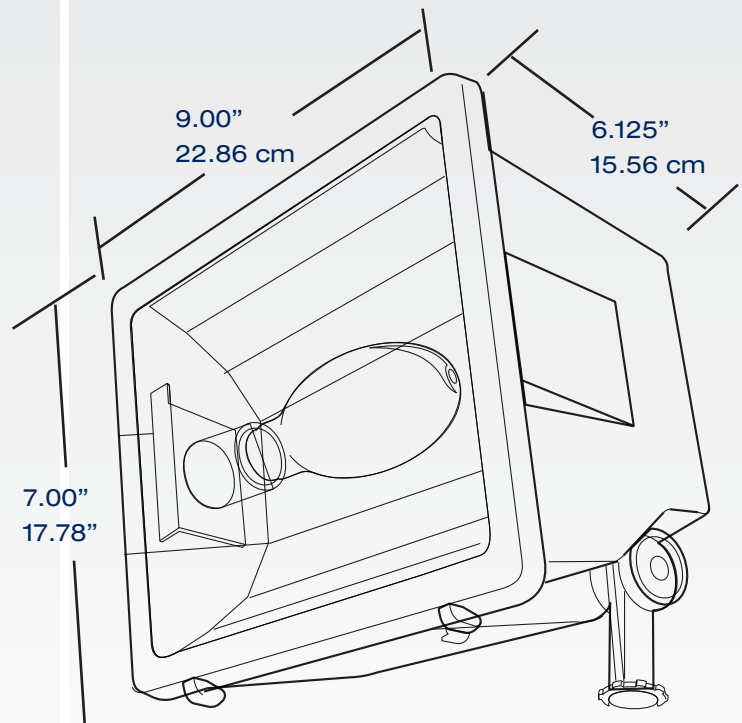

0112

www.rabdesign.ca